

The
HACKer's
HARDWARE
TOOLKit

2nd Edition

175 GADGETS
8 CATEGORIES

Yago Hansen

The 

HACKer's

HARDWARE

TOOLKit

175 GADGETS

8 CATEGORIES

Yago Hansen

| | |
|------------------------------|---|
| Copyright: | Copyright © 2019 Yago Hansen. All rights reserved. |
| Profile: | linkedin.com/in/radiusdoc |
| Title: | The Hacker's Hardware Toolkit |
| Subtitle: | Best gadgets for Red Team hackers |
| E-book download link: | https://github.com/yadox666/The-Hackers-Hardware-Toolkit |
| Edition: | 2nd English edition – August, 2019 |
| Level: | Medium |
| Paperback format: | 180 pages |
| Paperback editor: | Amazon KDP Paperback |
| Paperback ISBN: | 9781099209468 |
| Language: | English |
| Design: | Claudia Hui |
| License: | Free for e-book distribution, but not for commercial use |

Mini computers

Boards, palmtops

RF

SDR, cars, garages, satellite, GSM, LTE

Wi-Fi

Wi-Fi cards, antennas

RFID & NFC

Physical access, cards, magnetic stripe, cars

HID & Keylog

Rubberducky, mouse injection, wireless keyboards

Network

Routers, modems, VLAN, NAC

BUS

HW hacking, JTAG, cars, motorbikes

Accessories

Storage, powerbanks, batteries, chargers, GPS

DISCLAIMER



If you like
any of the devices shown here

DO NOT HESITATE to
take a picture
of the related page



OCR codes
shown here
are
not
malicious

Prices shown here are **only** estimated

Feel free to choose your PREFERRED shop

Mini computers

Boards, palmtops



GPD micro PC 6-inch Handheld Industry Laptop

Small handheld computer, ideal for carrying the best hacking software tools, and to handle all the external hardware hacking tools. The previous release supported Kali Linux. This version will probably support it too, since it supports Ubuntu Mate.

Specifications

| | |
|--------------------------------|--|
| Screen size | 6 inches |
| Screen technology | Gorilla® Glass 4, Sharp full-fit dazzling screen |
| Pointing device | Touchpad |
| Resolution | 1280x720 (16:9) (245ppi) (178°) |
| CPU | Intel® Celeron® N4100 (4 cores / 4 threads) |
| GPU | Intel® UHD Graphics 600 |
| RAM | LPDDR4 6GB |
| Storage | 128GB M.2 SSD, infinite capacity expansion |
| WI-FI | 802.11 a/b/g/n/ac compatible |
| Wired LAN | 10/100/1000Mbps Ethernet card |
| Bluetooth | 4.2 |
| RJ45 | 1 |
| HDMI | 1 |
| USB A | 3 |
| USB C | 1 |
| RS-232 | 1 |
| Card reader | Micro SDXC slot×1 |
| Dimensions & Weight | 153×113×23.5mm - 440g |
| Heat dissipation | Active |

CROWDFUNDING
314 EUR

GPD
GamePad Digital



Mini computers

Boards, palmtops



GPD Pocket 7-inch Handheld Industry Laptop

Small handheld computer, ideal for carrying the best hacking software tools, and to handle all the external hardware hacking tools. This release actually supports Kali Linux.

Specifications

| | |
|-------------------|---|
| Screen size | 7 inches |
| Screen technology | Boundless Glass |
| Pointing device | Touchpad |
| Resolution | FullHD 1920×1200 Retina |
| CPU | Intel Atom x7-Z8750 processor |
| GPU | Intel® UHD Graphics 600 |
| RAM | 8GB LPDDR3 memory |
| Storage | 128GB eMMC |
| WI-FI | 802.11 a/b/g/n/ac compatible |
| Wired LAN | 10/100/1000Mbps Ethernet card |
| Bluetooth | 4.1 |
| RJ45 | 1 |
| HDMI | 1 |
| USB A | 3 |
| USB C | 1 |
| RS-232 | 1 |
| Card reader | Micro SDXC slot×1 |
| Battery | 7000mAh super large-capacity battery (up to 12h) with fast charge |
| Dimension | 180×106×18.5mm ultra-small light body - 485g |
| Heat dissipation | Active |



Mini computers

Boards, palmtops



Raspberry Pi Zero W Multi-attack tool Linux based board

Small handheld computer, ideal for carrying the best hacking software tools, and to handle all the external hardware hacking tools. The most known Linux distro for it is P0wnP1 A.L.O.A. and Kali Linux. P4wnP1 is a highly customizable USB attack platform, based on a low cost Raspberry Pi Zero or Raspberry Pi Zero W. The successor of P4wnP1 is called P4wnP1 A.L.O.A. and hosted here: https://github.com/mame82/P4wnP1_aloa. I recommend the USB type-A pongo-pin adapter shown in the previous picture.

USB functions supported:

- USB Ethernet (RNDIS and CDC ECM)
- USB Serial
- USB Mass Storage (Flash drive or CD-ROM)
- HID Keyboard
- HID Mouse

It also offers many attacks referred to Wi-Fi, Bluetooth and Networks.

Specifications

1GHz, single-core CPU

512MB RAM

Mini HDMI and USB On-The-Go ports

Micro USB power

HAT-compatible 40-pin header

Composite video and reset headers


CSI camera connector

802.11 b/g/n wireless LAN

Bluetooth 4.1 & Bluetooth Low Energy (BLE)



FROM
17 EUR

AliExpress



Mini computers

Boards, palmtops

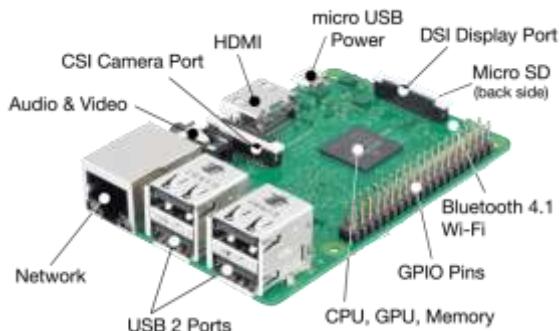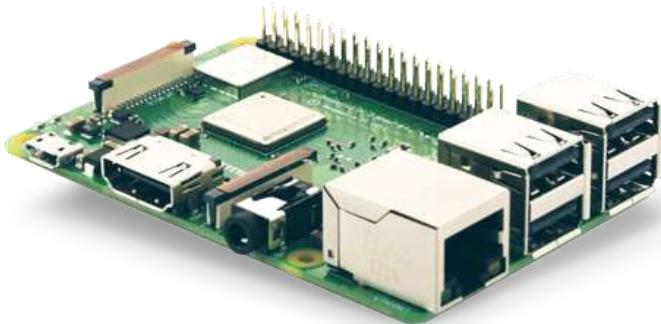

Raspberry Pi 3 model B+ Multi-attack tool Linux based board

The Raspberry Pi has a lot of fans, which means a lot of support for beginners. Aside from security professionals and hackers using it to run Kali Linux, many developers use the Pi for scientific and industrial applications. While the original Pi was made to introduce schoolchildren to programming, today's Raspberry Pi is capable of some truly amazing things with the right accessories and creativity. For building a prototype cyber-weapon, the Raspberry Pi has been the foundation for proof of concept attacks ranging from drone takeovers to mass Wi-Fi deauthing.

Specifications

| | |
|-------------|---|
| SoC: | Broadcom BCM2837B0 quad-core A53 (ARMv8) 64-bit @ 1.4GHz |
| GPU: | Broadcom Videocore-IV |
| RAM: | 1GB LPDDR2 SDRAM |
| Networking: | Gigabit Ethernet (via USB channel), 2.4GHz and 5GHz 802.11b/g/n/ac Wi-Fi |
| Bluetooth: | Bluetooth 4.2, Bluetooth Low Energy (BLE) |
| Storage: | Micro-SD |
| GPIO: | 40-pin GPIO header, populated |
| Ports: | HDMI, 3.5mm analogue audio-video jack, 4x USB 2.0, Ethernet, Camera Serial Interface (CSI), Display Serial Interface (DSI) |
| Dimensions: | 82mm x 56mm x 19.5mm, 50g |

FROM
30 EUR

**BEGINNER'S
CHOICE**



Mini computers

Boards, palmtops



Raspberry Pi 3 model A+ A much unknown Raspi board

The Raspberry Pi 3 Model A+ has the same mechanical footprint as the Raspberry Pi 1 Model A+, but both models have not been much known. This small board has a very different form factor as the Raspberry Pi model B+, and this is probably the only reason to buy this board instead its brother B+. Maybe for some projects this form factor makes a difference for integrating it in some cases, but there is no other reason for deciding to choose this model, since the B+ adds more performance and doubles the RAM size and offers an Ethernet port and three extra USB ports.

Specifications

SoC: Broadcom BCM2837B0, Cortex-A53 (ARMv8) 64-bit SoC @ 1.4GHz

RAM: 512MB LPDDR2 SDRAM

Networking: 2.4GHz and 5GHz IEEE 802.11.b/g/n/ac wireless LAN,

Bluetooth: Bluetooth 4.2/BLE

Storage: Micro SD port for loading your operating system and storing data

GPIO: Extended 40-pin GPIO header

Ports: Single USB 2.0 ports

CSI camera port for connecting a Raspberry Pi Camera Module

Full-size HDMI


DSI display port for connecting a Raspberry Pi Touch Display

4 pole stereo output and composite video por

Power: 5V/2.5A DC power input

5 V DC via GPIO header

FROM
29 EUR



Mini computers

Boards, palmtops



Raspberry Pi 4 model B+ The new Raspi version

The speed and performance of the new Raspberry Pi 4 is a step up from earlier models. For the first time, we've built a complete desktop experience. Whether you're editing documents, browsing the web with a bunch of tabs open, juggling spreadsheets or drafting a presentation, you'll find the experience smooth and very recognizable — but on a smaller, more energy-efficient and much more cost-effective machine. The fanless/energy-efficient Raspberry Pi runs silently and uses far less power than other computers. Raspberry Pi 4 comes with Gigabit Ethernet, along with on-board wireless networking and Bluetooth. Your new Raspberry Pi 4 has upgraded USB capacity: along with two USB 2 ports you'll find two USB 3 ports, which can transfer data up to ten times faster. There are different variants of the Raspberry Pi 4 available, depending on how much RAM you need (1GB, 2GB or 4GB).

Specifications

SoC: Broadcom BCM2711, Quad core Cortex -A72 (ARM v8) 64 -bit SoC 1.5GHz

RAM: 1GB, 2GB or 4GB LPDDR4 -2400 SDRAM (depending on model)

Networking: 2.4 GHZ and 5.0 GHZ IEEE 802.11AC Wireless + Gigabit Ethernet

Bluetooth: Bluetooth 5.0, BEL

Storage: Micro SD port for loading your operating system and storing data

GPIO: Extended 40-pin GPIO header

Ports: 2 USB 3.0 ports; 2 USB 2.0 ports.

CSI camera port for connecting a Raspberry Pi Camera Module

2 x micro-HDMI ports (up to 4kp60 supported)

2 -lane MIPI DSI display port

CSI camera port 2 -lane MIPI

4-pole stereo audio and composite video port

Power: 5V DC via USB-C connector (minimum 3A*)

5V DC Via GPIO Header (Minimum 3A*)

FROM
51 EUR

AliExpress®



Mini computers

Boards, palmtops



ODROID XU4 Fully energized Raspberry Pi

Sometimes, in some cases, Raspberry Pi is not enough for certain hacking projects. For these cases in which you need more CPU, GPU, faster storage access or just connecting a USB 3 device, this is your board. For the most of the projects, Raspberry Pi board is a cheap and widely supported computer, but for some of them, like GSM/4G LTE hacking projects, you will need USB3 for high grade SDR devices, like BladeRF or USRP. Also, in projects where you need to read real-time rainbow tables you will need a high speed bus to storage like EMMC or SATA. This board offers active (XU4) or passive cooling versions (XU4Q). It has support for Linux and Android OS.

Specifications

Samsung Exynos5422 Cortex™-A15 2Ghz and Cortex™-A7 Octa-core CPUs

Mali-T628 MP6(OpenGL ES 3.1/2.0/1.1 and OpenCL 1.2 Full profile)

2Gbyte LPDDR3 RAM PoP stacked

eMMC5.0 HS400 Flash Storage

2 x USB 3.0 Host, 1 x USB 2.0 Host

Gigabit Ethernet port (10/100/1000Mbps Ethernet with RJ-45 Jack - Auto-MDIX support)

HDMI 1.4a for display

Size : 83 x 58 x 20 mm approx.(excluding cooler)

Power: 5V/4A input

Linux Kernel 4.14 LTS

eMMC module socket : eMMC 5.0 Flash Storage (up to 64GByte)

MicroSD Card Slot (up to 128GByte)

Wi-Fi not included

40 pin Raspberry Pi styled connector

FROM
79 EUR

ODROID
Hardkernel



Mini computers

Boards, palmtops



RockPro64

Linux high performance based board

The ROCKPro64 is the most powerful single board computer on offer from PINE64, featuring a Rockchip RK3399 hexa-core SOC as well as a quad-core Mali-T860MP4 and up-to 4GB of dual-channel LPDDR4 system memory. Moreover, the board comes packed with features, including an USB 3.0 and USB type-C with DP1.2 port, a full PCIe x4 as well as eMMC module socket. You also get a 40pin header with I2C, SPI, UARTs and GPIOs. The board is backwards compatible with many of the existing PINE64 peripherals, including the Wi-Fi/BT module, camera module and LCD panel but an array of new peripherals specific for the board is also available. All this in the exact same model "A" dimension as the original PINE A64. It offers a lot of accessories, as a case with an LCD touch screen. The only disadvantage I noticed is that the size is much bigger as a Raspberry Pi computer. The ROCKPro64 4GB board is designated as LTS (long Term Support) which means that PINE64 is committed to supply it for at least 5 years – until year 2023 and beyond. This is very necessary if you are thinking about converting your PoC into a production product.

Specifications

| |
|--|
| Rockchip RK3399 Hexa-Core (dual ARM Cortex A72 and quad ARM Cortex A53) 64-Bit Processor |
| MALI T-860 Quad-Core GPU |
| 2GB or 4GB RAM of dual-channel LPDDR4 + 128 MB SPI Flash |
| PI-2 40 pin GPIO bus with I2C, SPI, UARTs and GPIOs |
| HDMI 2.0 4K support up to 60 fps |
| PCIe x4 Open-Ended Slot |
| USB 3.0 and USB type C with DP1.2 port + 2x USB 2.0 ports |
| eMMC module socket |
| CMOS camera port |
| Stereo audio Jack with MIC support |
| 12V DC 3A-5A 5.5" barrel port |
| Gigabit Ethernet |
| MiPi DSI port up to 2560x1600 + touch panel |
| Optional 802.11 AC + BT 4.0/5.0 Expansion Module |
| Android and Linux support |

FROM
59 EUR

PINE64



Mini computers

Boards, palmtops



Coral USB Accelerator Powerful Machine Learning for Linux

The Coral USB Accelerator brings powerful Machine Learning inferencing capabilities to existing Linux systems. Featuring the Edge TPU (a small ASIC designed and built by Google) the USB Accelerator provides high performance ML inferencing with a low power cost over a USB 3.0 interface. For example, it can execute state-of-the-art mobile vision models such as MobileNet v2 at 100+ fps, in a power efficient manner. This allows you to add fast ML inferencing to your embedded AI devices in a power-efficient and privacy-preserving way. Models are developed in TensorFlow Lite framework and then compiled to run on the USB Accelerator.

Specifications

Google Edge TPU ML accelerator coprocessor

USB 3.0 Type-C socket

Supports Debian Linux on host CPU

Models are built using TensorFlow

Fully supports MobileNet and Inception architectures though custom architectures are possible

Compatible with Google Cloud

Edge TPU accelerator

ASIC designed by Google that provides high performance ML inferencing for TensorFlow Lite models

Arm 32-bit Cortex-M0+ Microprocessor (MCU)

USB 3.1 (gen 1) port and cable (Super Speed, 5Gb/s transfer speed)


FROM
75 EUR

 **seeed**
The IoT Hardware Enabler



Mini computers

Boards, palmtops

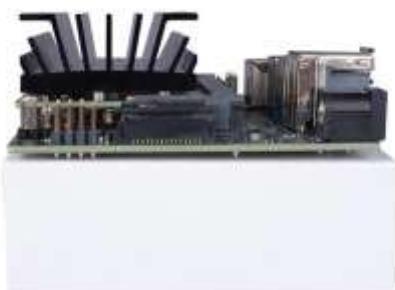

nVidia Jetson Nano HDK AI development in a small form factor

The NVIDIA® Jetson Nano™ Developer Kit delivers the compute performance to run modern AI workloads at unprecedented size, power, and cost. Developers, learners, and makers can now run AI frameworks and models for applications like image classification, object detection, segmentation, and speech processing. The developer kit can be powered by micro-USB and comes with extensive I/Os, ranging from GPIO to CSI. This makes it simple for developers to connect a diverse set of new sensors to enable a variety of AI applications. It's incredibly power-efficient, consuming as little as 5 watts. Jetson Nano is also supported by NVIDIA JetPack, which includes a board support package (BSP), Linux OS, NVIDIA CUDA®, cuDNN, and TensorRT™ software libraries for deep learning, computer vision, GPU computing, multimedia processing, and much more. The software is even available using an easy-to-flash SD card image, making it fast and easy to get started. The same JetPack SDK is used across the entire NVIDIA Jetson™ family of products and is fully compatible with NVIDIA's world-leading AI platform for training and deploying AI software. This proven software stack reduces complexity and overall effort for developers.

Specifications

128-core NVIDIA Maxwell™ GPU

Quad-core ARM® A57 CPU

4 GB 64-bit LPDDR4

USB 3.0 Type A

USB 2.0 Micro-B

HDMI/DisplayPort

M.2 Key E storage support

Gigabit Ethernet - PoE connector

GPIOs, I2 C, I2 S, SPI, UART

MIPI-CSI camera connector


FROM
99 EUR

 **seeed**
The IoT Hardware Enabler



Mini computers

Boards, palmtops

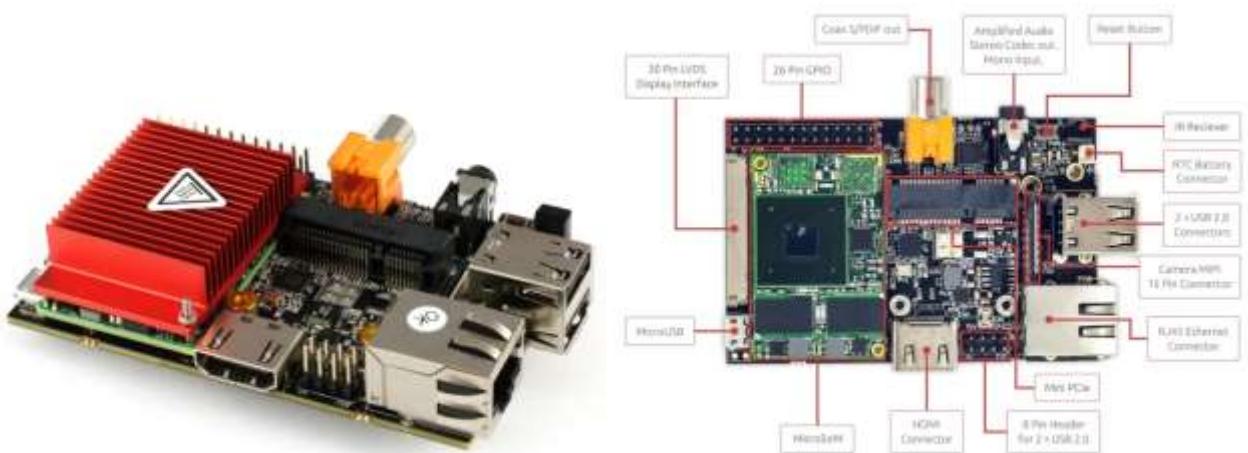

HummingBoard Pro Multi-attack tool Linux small sized

Get ready to fall in love with the HummingBoard family – a small and powerful, low-cost ARM computers that ignite the imagination. Whatever your dream is, the HummingBoard family will help make it happen – the possibilities for creating the next great IoT innovation are truly limitless.

IoT is about “things” connecting with systems, people and other things such as sensors and actuators. IoT field is emerging with a large variety of use cases and applications, requiring different connectivity methods and dynamic and flexible hardware capabilities. The Pro version of the HummingBoard carrier offers a valuable development platform with advanced capabilities (including multiple storage methods) in an embedded device. As opposed to the HummingBoard Base model, the HummingBoard Pro focuses on larger file storage via mSATA, LVDS display integration, as well as extensibility through additional board access.

Specifications

NXP i.MX6 ARM A9 Quad core

2GB RAM

8GB eMMC

Commercial Temp. (0° to 70° C) included heatsink

Includes Wi-Fi/BT

Size: 85mm x 56mm

FROM
97 EUR

 **SolidRun**
Embedded Edge Computing



Mini computers

Boards, palmtops



Cubox-i2ex Multi-attack tool Linux based board

With its core technology based on SolidRun's state-of-the-art System on a Module (SOM), the CuBox-i is built from only the highest quality components, complying with both commercial and industrial standards. With no mechanical parts or fans – nothing that moves whatsoever – your CuBox-i is not only ultra-silent, without any bothersome whirrs or clicks, but built for a long, long life.

Specifications

SOC i.MX6 Dual (2 cores) (optional i.MX6 Quad)

1GB – 2 GB RAM (64 bit @ 1066Mbps)

GPU GC2000 (OpenGL ES1.1,2.0 Quad Shader)

HDMI 1080p with CEC (1.4, 3D support)

Wi-Fi / Bluetooth (Built In)

USB 2.0 x2

Ethernet 10/100/1000 Mbps

Storage: microSD, eSata II 3Gbps

RTC

Optical S/PDIF Audio Out

Micro USB to UART

InfraRed for Remote Control (RX/TX)

DC Jack 5.5mm 5V, Max 2A current

Size 2"x2"x2" with enclosure

FROM
80 EUR

 **SolidRun**
Embedded Edge Computing



Mini computers

Boards, palmtops



NanoPi Neo2 Another hacking carrier board

The NanoPI NEO2 is a newly released super tiny ARM board by FriendlyElec. It uses Allwinner's 64-bit H5 quad-core SoC (ARM Cortex-A53). It has internal hexa-core Mail450 GPU, 512M DDR3 RAM. A UbuntuCore and Armbian image files are ready for it. The NanoPi NEO2 inherits NEO's form factor and has compatible interfaces and ports with NEO. In addition in such a small dimension it has Gbps Ethernet and one USB host port. These features make it especially suitable for applications that require high data throughput, speedy data transmission and high performance. Hobbyists and makers will just love it. It offers a lot of extra accessories available for it, like cases, accelerometer sensor, hats, etc.

Specifications

| | |
|---------------------------|---|
| CPU: | Allwinner H5, Quad-core 64-bit high-performance Cortex A53 |
| DDR3 RAM: | 512MB |
| Connectivity: | 10/100/1000M Ethernet, RTL8211E-VB-CG chip |
| USB Host: | USB Type A x 1 and USB pin header x 2 |
| MicroSD Slot: | MicroSD x 1 for system boot and storage |
| LED: | Power LED x 1, System LED(Blue) x 1 |
| GPIO1: | 2.54mm pitch 24 pin-header, compatible with Raspberry Pi's GPIO pin1 - pin 24. It includes UART, SPI, I2C, IO |
| GPIO2: | 2.54mm pitch 12 pin-header. It includes USB, IR receiver, I2S, IO etc |
| Serial Debug Port: | 2.54mm pitch 4pin-header |
| Audio In/Out: | 2.0mm pitch 4 pin-header |
| PCB Dimension: | 40 x 40mm |
| MicroUSB: | Power input(5V/2A) and OTG |
| OS/Software: | u-boot,Ubuntu Core |


FROM
20 EUR

 FRIENDLY
ELEC



Mini computers

Boards, palmtops

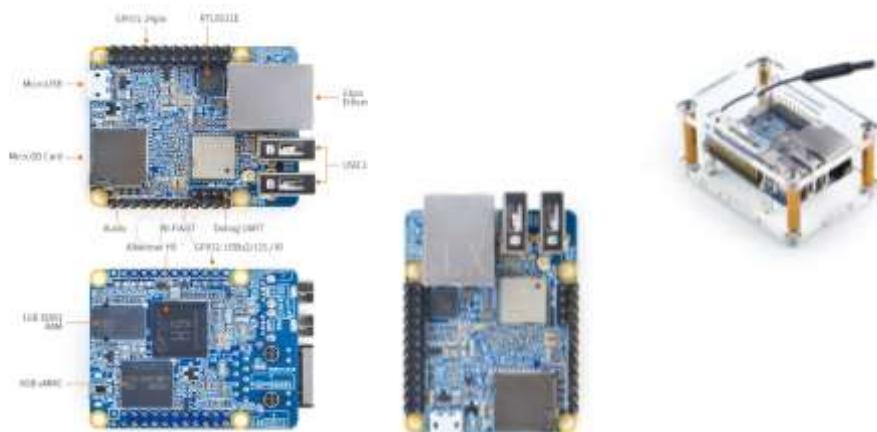

NanoPi-NEO Plus2 Another Nanopi super energized

The NanoPi NEO Plus2 is another Allwinner based ARM board developed by FriendlyElec. It uses Allwinner's 64-bit quad-core A53 SoC with hexa-core Mali450 GPU and features 1GB of DDR3 RAM and 8GB eMMC. With a small size of only 40 x 52mm the NanoPi NEO Plus2 has rich on-board resources: AP6212A WiFi & Bluetooth module, Gbps Ethernet and two USB hosts. It supports system-boot from a MicroSD card. The NanoPi NEO Plus2 has a carefully designed power system and 6-layer PCB layout. These features enhance the board's heat dissipation. The NanoPi NEO Plus2 meets popular IOT applications requirements for small size, high-speed and large throughput data transmission and high performance computing.

Specifications

| | |
|---------------------|--|
| CPU: | Allwinner H5,Quad-core 64-bit high-performance Cortex A53 |
| DDR3 RAM: | 1GB |
| Storage: | 8GB eMMC |
| Network: | Gbps Ethernet |
| WiFi: | 802.11b/g/n |
| Bluetooth: | 4.0 dual mode |
| USB Host: | 2 x Independent USB Host |
| MicroSD Slot: | 1 x Slot. It supports system booting or is used to hold a storage card |
| Audio Input/Output: | 5-Pin, 2.0mm pitch pin-header |
| MicroUSB: | power input |
| Debug Serial: | 4Pin, 2.54mm pitch pin-header |
| GPIO1: | 24Pin, 2.54mm pitch double-row pin-header containing UART, SPI, I2C and IO |
| GPIO2: | 12Pin, 2.54mm pitch pin-header containing USB, IR receiver,I2S and IO |
| PCB Dimension: | 40 x 52mm |
| Power Supply: | DC 5V/2A |


FROM
45 EUR

AliExpress



Mini computers

Boards, palmtops

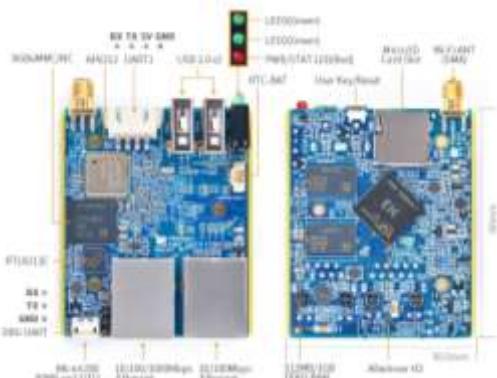

NanoPi R1

The NanoPi with 2x ethernet ports

This Linux-driven board brings 10/100 and 10/100/1000Mbps Ethernet ports, Wi-Fi and Bluetooth capabilities. It's good networking performance, and features make it a good platform for various network applications." On the hardware end, the NanoPi R1 packs an Allwinner H3 SoC with a quad-core Arm Cortex-A7, up to 1Gb of DDR3 RAM, and optional 8Gb of eMMC. Connectivity options include Gigabit Ethernet port, Fast Ethernet port, 802.11b/g/n Wi-Fi (with SMA antenna interface), and Bluetooth 4.0 dual mode (classic/LE). The board also includes a micro SD card slot, 2X USB Type-A host ports, a micro USB OTG port, a 3-pin 2.54mm pitch pin-header (for serial console), and 4-pin 2.54mm pitch UART header. Since it's a headless board, do not forget to buy any UART to USB adaptor such as:

<https://www.aliexpress.com/item/32801241568.html>

Specifications

| | |
|--------------------------|---|
| CPU: | Allwinner H3, Quad-core Cortex-A7 Up to 1.2GHz |
| DDR3 RAM: | 512MB/1GB |
| Storage: | NC/8GB eMMC |
| Network: | 10/100/1000M Ethernet x 1, 10/100M Ethernet x 1 |
| USB Host: | Type-A x2 |
| WiFi: | 802.11b/g/n, with SMA antenna interface |
| Bluetooth: | 4.0 dual mode |
| Debug Serial Port/UART0: | 3Pin 2.54mm pitch pin-header |
| microSD Slot: | 1 |
| microUSB: | for OTG and power input |
| LED: | 3 |
| PCB Dimension: | 50.5 x 60mm |
| Power: | DC 5V/2A |


FROM
40 EUR

AliExpress



Mini computers

Boards, palmtops

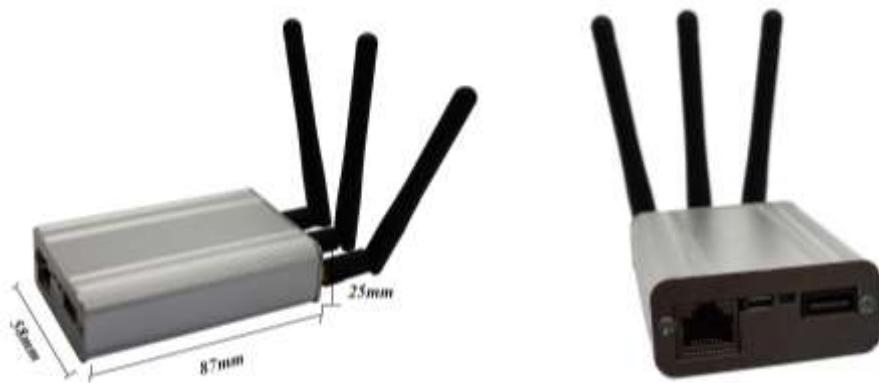

Wi-Fi Pineapple Wireless Another Pineapple clone device

The Wi-Fi pineapple is the original Wi-Fi attack tool developed by Hak5. There are three different models available from Hak5. During the last years some Hak5 products clones has been created by Chinese companies. This is a good example of this. This board offers quite the same specifications as the Hak5 Pineapple Nano board and promises compatibility with the Pineapple firmware.

Specifications

CPU: 400 MHz MIPS Atheros AR9331 SoC

Memory: 16 MB ROM, 64 MB DDR2 RAM

Disk: ROM + Micro SD (not included)

Wireless: Atheros AR9331 + Atheros AR9271*2, both IEEE 802.11 b/g/n

Ports: (2) RP-SMA Antenna

Ethernet over USB (ASIX AX88772A)

USB 2.0 Host, Micro SD

Power: USB 5V 1.5A. Includes USB Y-Cable

Configurable Status Indicator LED, Configurable Reset Button

WiFi Pineapple Wiki: <http://wiki.wifipineapple.com>

FROM
53 EUR

AliExpress



Mini computers

Boards, palmtops



Orange Pi Zero Multi-attack tool Linux based board

It's an open-source single-board computer. It can run Android 4.4, Ubuntu and Debian. It uses the AllWinner H2 SoC, and has 256MB/512MB DDR3 SDRAM (256MB version is Standard version). Since this hardware is very cheap in comparison to other models, the main problem is the lack of support and the poor forums. So you'll need to solve most of the problems yourself, because the included Linux version has a lot of issues.

Specifications

CPU H2 Quad-core Cortex-A7 H.265/HEVC 1080P.

GPU Mali400MP2 GPU @600MHz (Supports OpenGL ES 2.0)

256MB/512MB DDR3 SDRAM(Share with GPU)(256MB version is Standard version)

microSD card (Max. 32GB)/ 2MB SPI Flash

10/100M Ethernet RJ45 POE is default off.

WIFI XR819, IEEE 802.11 b/g/n

Audio Input MIC

Supports external board via 13pins

USB OTG can supply power

1x USB 2.0 HOST, 1x USB 2.0 OTG

Power Button

26 Pins Header,

13 Pins Header, with 2x USB, IR pin, AUDIO(MIC, AV)

LED

Power led & Status led

Supported OS: Android, Lubuntu, Debian

48 mm x 46mm - 26g

FROM
10 EUR



Mini computers

Boards, palmtops



NanoPi Duo2

A tiny core based motherboard for IoT

The NanoPi Duo2 is another ARM board designed and developed by FriendlyELEC for makers and hobbyists. It is only 55 x 25.4mm. It features Allwinner quad-core A7 processor H3, and has 256M/512M DDR3 RAM, onboard WiFi & bluetooth module and an OV5640 camera interface. It works with Linux variants such as Ubuntu Core. It takes power input from its MicroUSB port and can be booted from a Micro SD card. It works with general bread-boards. Interface pins such as USB, SPI, UART, I2C, PWM, IR, audio input & output and Fast Ethernet etc are populated. NanoPi Duo2 supports software utilities such as WiringNP and Python etc. These are all open source. It is suited for various IoT applications.

Specifications

| | |
|--------------------------|---|
| CPU: | Allwinner H3, Quad-core Cortex-A7 Up to 1.2GHz |
| DDR3 RAM: | 512M |
| Connectivity: | 10/100M Ethernet |
| USB Host: | 2.54mm pin x2, exposed in 2.54mm pitch pin header |
| Wireless: | 802.11b/g/n & Bluetooth V4.0 of 1, 2 and 3 Mbps. |
| Audio input/output Port | exposed in 2.54mm pitch pin header |
| Debug Serial Port/UART0: | exposed in 2.54mm pitch pin header |
| microSD Slot: | 1 |
| microUSB: | OTG and power input |
| GPIO1: | 2.54mm spacing 16pin. It includes UART, SPI, I2C, Audio etc |
| GPIO2: | 2.54mm spacing 16pin. It includes USB, 10/100M Ethernet, IO |
| PCB Dimension: | 25.4 x 55mm |
| Power: | DC 5V/2A |
| OS: | U-boot, Linux-4.14 / Linux-3.4, Ubuntu 16.04.2 LTS (Xenial) |


FROM
20 EUR

FRIENDLY
ELEC



Mini computers

Boards, palmtops

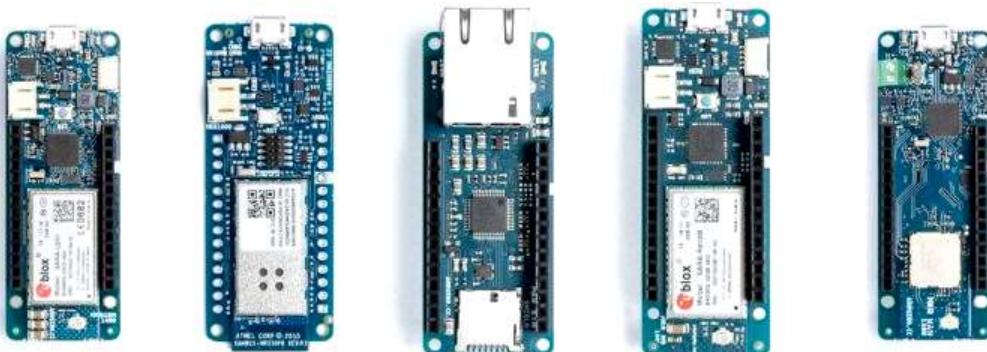

Arduino MKR boards

Arduino based IoT connected boards

Arduino has been known for easy-to-use and inexpensive development boards for a long time. Their relatively new MKR family of boards are especially well suited for IoT because they offer support for different connectivity options. At the time of writing, Arduino has boards currently available that support Wi-Fi, LoRa, Sigfox, and GSM Cellular. They have additional MKR boards coming soon that add support for Ethernet and NB-IoT and Cat M1 Cellular.

Specifications


| | |
|-------------------------------------|---|
| Microcontroller | SAMD21 Cortex-M0+ 32bit low power ARM MCU |
| Board Power Supply (USB/VIN) | 5V |
| Supported Battery(*) | Li-Po single cell, 3.7V, 700mAh minimum |
| Circuit Operating Voltage | 3.3V |
| Digital I/O Pins | 8 |
| PWM | 12 (0, 1, 2, 3, 4, 5, 6, 7, 8, 10, A3 - or 18 -, A4 -or 19) |
| Other ports | UART, SPI, I2C |
| Analog Pins | Input: 7 (ADC 8/10/12 bit) Output: 1 (DAC 10 bit) |
| External Interrupts | 8 (0, 1, 4, 5, 6, 7, 8, A1 -or 16-, A2 - or 17) |
| DC Current per I/O Pin | 7 mA |
| Flash Memory | 256 KB |
| SRAM | 32 KB |
| EEPROM | no |
| Clock Speed | 32.768 kHz (RTC), 48 MHz |
| LED_BUILTIN | 6 |
| USB | Full-Speed USB Device and embedded Host |
| Size & Weight | 61.5 mm x 25 mm (32 gr.) |

FROM
28 EUR



Mini computers

Boards, palmtops

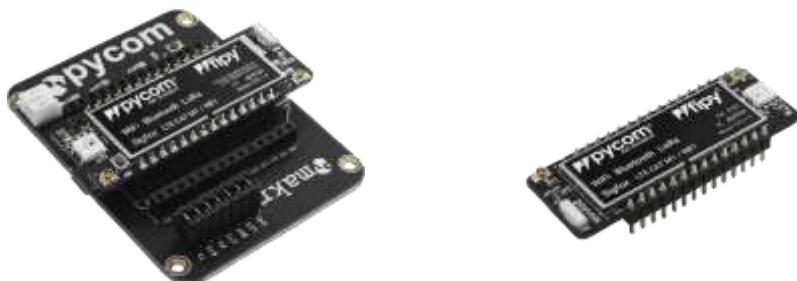

Pycom Fipy ESP32 board programmable via Python

Imagine 5 networks in one perfectly-shaped, same small foot print as WiPy, LoPy and SiPy, IoT development board. MicroPython enabled. Featuring Wi-Fi, Bluetooth, LoRa, Sigfox and dual LTE-M (CAT M1 and NB-IoT) the FiPy gives access to all the world's LPWAN networks on one tiny board. As all other Pycom boards, it offers a MicroPython reduced Python IDE to program all your applications using just Python language and supported libraries.

Specifications

Espressif ESP32 SoC powerful CPU

Dual processor and Wi-Fi radio system on chip

Networking processor handles the Wi-Fi connectivity and the IPv6 stack

Main processor is entirely free to run the user application

An extra ULP-coprocessor that can monitor GPIOs, the ADC channels and control most of the internal peripherals during deep-sleep mode while only consuming 25uA

Five networks: Wi-Fi, BLE, cellular LTE-CAT M1/NB1, LoRa and Sigfox

1KM Wi-Fi range

MicroPython enabled (multithreading)

Fits in a standard breadboard (with headers)

Ultra-low power usage: a fraction compared to other connected microcontrollers

2 x UART, 2 x SPI, I2C, micro SD card

Analogue channels: 8_12 bit ADCs, 2_8 bit DAC

Timers: 2_64 bit with PWM with up to 16 channels

DMA on all peripherals

GPIO: Up to 22

RAM: 4MB

Flash Memory: 8MB

Hardware floating point acceleration

Voltage: Input 3.3V 5.5V, Output: 3v3 capable of sourcing up to 400mA

FROM
54 EUR

pycom
GO INVENT





RTL-SDR v.3

Cheap and powerful SDR RX device

This USB dongle style SDR is the most known and compatible Software Defined Radio device, with RX only capabilities. This is an RTL-SDR blog V3 software defined radio receiver with RTL2832U ADC chip, R820T2 tuner, 1PPM TCXO, SMA F connector and aluminium case with passive cooling. Tunes from 500 kHz to 1.7 GHz with up to 3.2 MHz (2.4 MHz stable) of bandwidth. (HF works in direct sampling mode). Perfect for use as a computer based radio scanner with free software like SDR#, HDSDR, SDR-Radio, GQRX or SDR Touch on Android. Works on Windows, OSX, Linux, Android and computers like the Raspberry Pi. Great for many applications including general radio, air traffic control, public safety, ADS-B aircraft radar, ACARS, trunked radio, P25/MotoTRBO digital voice, POCSAG, weather balloons, APRS, NOAA APT/Meteor M2 weather satellites, radio astronomy, DAB, classroom learning, or as a low cost panadapter with a ham radio. This model has several improvements over other brands. It uses the improved R820T2 tuner, a 1PPM TCXO, better components, a redesigned lower noise PCB, cooling improvements, extra ESD protection and an SMA F connector. It also has a software bias-tee for powering LNA's and active antennas.

Remember to buy the version 3 (V3) that includes new important features (bias tee, etc.)

Specifications

Bandwidth: Up to 2.4 MHz stable

ADC: RTL2832U 8 bits

Frequency Range: 500 kHz – 1766 MHz (500 kHz – 24 MHz in direct sampling mode)

Typical Input Impedance: 50 Ohms


Typical Current Draw: 270 – 280 mA

FROM
25 EUR

BEGINNER'S
CHOICE

RTL-SDR.COM



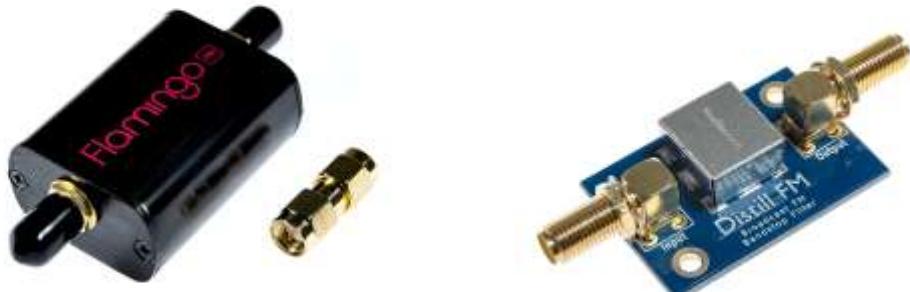

Flamingo FM Broadcast FM Bandstop Filter for SDR

A high-quality, high-performance band-stop filter designed for software defined radio (SDR) applications. Designed and manufactured by NooElec. Broadcast FM can be particularly problematic due to the high-powered transmitters used for broadcasting in some areas. These signals can overload the front end of an SDR, causing imaging and a number of other issues. It provides sufficient attenuation for broadcast FM frequencies (>40dB typical) while ensuring adjacent bands, such as the important VHF airband (108-137MHz) are minimally affected. The -3dB rolloff of the filter is 80MHz and 115MHz. Minimal out-of-band insertion loss means the filter can stay in place for most any application. As a true band-stop filter, you are able to pass-through DC (bias power) when it is required. DC current handling is 250mA (min), and the maximum recommended signal level is +18dBm (5Vp-p), so there is no issue using the filter for higher-power applications.

Specifications

Filter rolloff: 80MHz and 115MHz (-3dB)

BIAS power: Pass-through

DC current handling: 250 mA (min)

Max. signal level: 18 dBm (5V p-p)

Typical Current Draw: 270 – 280 mA

FROM
17 EUR

amazon





Flamingo AM

Broadcast AM notch Filter for SDR

A high-quality, high-performance bandstop filter designed for software defined radio (SDR) applications. Designed and manufactured by NooElec. Broadcast AM can be particularly problematic due to the high-powered transmitters used for broadcasting in some areas. These signals can overload the front end of an SDR, causing imaging and a number of other issues. As such, Flamingo AM makes a great companion to our Ham It Up series of HF upconverters. It provides sufficient attenuation for broadcast AM frequencies (>40dB typical) while ensuring adjacent bands, such as 160m, are minimally affected. The -3dB rolloff of the filter is 350kHz and 1900kHz. Minimal out-of-band insertion loss means the filter can stay in place for most any application, though we do recommend removing Distill:AM from your setup when not listening to HF frequencies. As a true bandstop filter, you are able to pass-through DC (bias power) when it is required. DC current handling is 250mA (min), and the maximum recommended signal level is +18dBm (5Vp-p), so there is no issue using the filter for higher-power applications. Flamingo AM has its filter circuitry fully shielded with an EMI frame, and has its front end protected by an ESD diode meant for RF applications. 2 mounting holes are available on the PCB for various mounting options, and the SMA hardware (washer and nut) is included.

Specifications

| | |
|------------------------------|-------------------------|
| Filter rolloff: | 350kHz - 1900kHz (-3dB) |
| BIAS power: | Pass-through |
| DC current handling: | 250 mA (min) |
| Max. signal level: | 18 dBm (5V p-p) |
| Typical Current Draw: | 270 – 280 mA |


FROM
17 EUR

amazon



RF

SDR, cars, garages, satellite, GSM, LTE

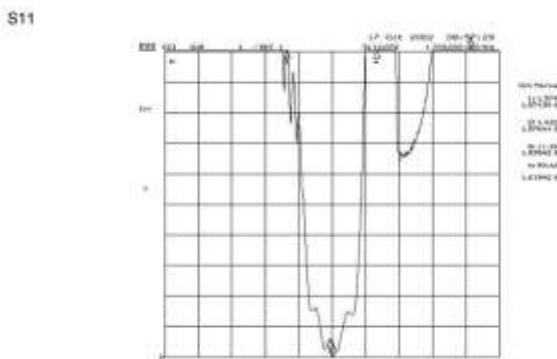

GPS bandpass filter

Specially designed for GPS applications

This is a small, cost-effective band pass filter centered at 1575.42 MHz with a typical insertion loss of 2.7 dB in the pass band. This filter has excellent rejection specifications. Rejection at 850 MHz and 1640 MHz for instance, is greater than 40 dB. The filter also provides power handling of up to a maximum +10 dBm and has an operating temperature range of -40C to +85C. Note: you can swap the input for output in this filter as it is largely symmetric in terms of S21=S12. The possible applications are:

- GPS L1 signal reception
- Rejection of strong signals in Cellular, LTE, UHF and 915 MHz, 2.4 GHz ISM bands
- Filtering in Software-defined radio receivers and transmitters such as HackRF, RTL-SDR, USRP, etc.
- In the Lab or out in the Field

Specifications

Passband: 1575 +/- 7.5 MHz

Frequency Typical Attenuation:
850 MHz @ 45 dB
1500 MHz @ 40 dB
1535 MHz @ 30 dB
1615 MHz @ 45 dB
1640 MHz @ 45 dB
1700 MHz @ 50 dB

Maximum DC voltage on input or output: +4V

Maximum RF input signal Level: +10 dBm

Connectors: SMA-F connectors

FROM
20 EUR





HackRF One

Medium-category SDR with TX capabilities

HackRF One from Great Scott Gadgets is a Software Defined Radio peripheral capable of transmission or reception of radio signals from 1 MHz to 6 GHz. Designed to enable test and development of modern and next generation radio technologies, HackRF One is an open source hardware platform that can be used as a USB peripheral or programmed for stand-alone operation. This SDR offers one important improvement compared to other cheap ones, it permits transmission. But the RF quality of this SDR isn't as good as expected. The main goal is that you will find dozens of supported PoC for it.

Specifications

- 1 MHz to 6 GHz operating frequency
- Half-duplex transceiver
- Up to 20 million samples per second
- 8-bit quadrature samples (8-bit I and 8-bit Q)
- Compatible with GNU Radio, SDR#, and more
- Software-configurable RX and TX gain and baseband filter
- Software-controlled antenna port power (50 mA at 3.3 V)
- SMA female antenna connector
- SMA female clock input and output for synchronization
- Convenient buttons for user programming
- Internal pin headers for expansion
- Hi-Speed USB 2.0
- USB-powered
- Open source hardware based licensing

FROM
260 EUR

BEGINNER'S
CHOICE



RF

SDR, cars, garages, satellite, GSM, LTE



PortaPack for HackRF One Converts HackRF in a handheld device

Add a PortaPack H1 to your HackRF One software-defined radio, and leave your laptop behind! The PortaPack H1 attaches to your HackRF and adds a touchscreen LCD, navigation controls, headphone jack, 2.5ppm clock reference, real-time clock, micro SD card slot, and custom aluminium case. Just add a USB battery, and you're ready to explore radio spectrum wherever you are. The PortaPack firmware runs on the fast ARM processors in your HackRF. No computer is necessary (except for reprogramming its firmware). There are two main forks in github for this adapter, since the most powerful one is:

<https://github.com/furrtek/portapack-havoc>

This firmware offers many different standalone functionalities that will improve your HackRF One and it also permits working in SDR mode from your computer.

Specifications

2.4 inch, 240 x 320 RGB LCD with resistive touch panel.

Four-way arrow keys, rotary jog wheel, and select button.

Headphone/microphone jack, compatible with recent Samsung and Apple mobile headsets.

2.5 parts-per-million temperature-compensated clock reference.

Coin battery for preserving settings and date/time.

Micro SD card slot for data and code storage.

Custom milled aluminium case, anodized black.

SSB, AM, narrowband FM, wideband FM audio reception, with spectrum waterfall. [Details]

Wideband (18MHz) spectrum analysis and waterfall.

Monitoring of boat (AIS), automobile (TPMS), and utility meter transponders (ITRON ERT).

HackRF mode runs HackRF firmware for use with host computer SDR software.

PPM calibration for more accurate tuning.. Sleep mode saves power by turning off just the display.

HACKRF NOT INCL.
220 EUR

SHAREBRAINED TECHNOLOGY, INC.





PortaPack + HackRF One clone

An updated Chinese clone

Today there are many HackRF One Chinese clones available in internet. There are also some Portapack clones available, but take care, some do not offer good quality and some do not work with Portapack Havoc firmware. I have personally tested this device and it works like a charm and it offers a whole new functionality. The full bundle includes a new high quality aluminium case.

It adds a TCXO high precision clock (0.5ppm) that permits adding a new feature in Portapack havoc firmware: GPS spoofing. For instructions and detailed info just visit:

<http://gridrf.com/products/detail/id/11.html>

Specifications

- 2.4 inch, 240 x 320 RGB LCD with resistive touch panel.
- Four-way arrow keys, rotary jog wheel, and select button.
- Headphone/microphone jack, compatible with recent Samsung and Apple mobile headsets.
- 2.5 parts-per-million temperature-compensated clock reference.
- Coin battery for preserving settings and date/time.
- Micro SD card slot for data and code storage.
- Custom milled aluminium case, anodized black.
- SSB, AM, narrowband FM, wideband FM audio reception, with spectrum waterfall. [Details]
- Wideband (18MHz) spectrum analysis and waterfall.
- Monitoring of boat (AIS), automobile (TPMS), and utility meter transponders (ITRON ERT).
- HackRF mode runs HackRF firmware for use with host computer SDR software.
- PPM calibration for more accurate tuning.. Sleep mode saves power by turning off just the display.
- TCXO ref clock included 0.5ppm

HACKRF INCL.
184 EUR

AliExpress



RF

SDR, cars, garages, satellite, GSM, LTE



Crazyradio PA USB 2.4GHz transceiver

It features a 20dBm power amplifier, LNA and comes pre-programmed with Crazyflie compatible firmware. The power amplifier boosts the range, giving a range of more than 1km together with the Crazyflie 2.0 and above 2km Crazyradio PA to Crazyradio PA. The Crazyradio PA is not only for usage together with the Crazyflie and Crazyflie 2.0. Since it's an open project with firmware written from scratch and a Python API for usage it's great building block for systems that require longer range than Wi-Fi and doesn't have the same requirements for bandwidth. The hardware comes shipped with the latest firmware as well as a bootloader that enables firmware upgrades via USB without any additional hardware needed. It is been widely used for hacking wireless keyboards and mice, and it's supported by the bettercap framework.

Specifications

Radio power amplifier giving 20dBm (100 mW) output power (1km range LOS with Crazyflie 2.0)

Open source firmware

Firmware upgrade via USB

Low latency

Based on **nRF24LU1+** chip from Nordic Semiconductor

8051 MCU at up to 16MHz with 32Kb flash and 2Kb SRAM

2.4GHz ISM band radio

USB device peripheral

125 radio channels

2Mbps, 1Mbps and 250Kps communication data rate

Sends and receives data packets of up to 32 bytes payload

Automatically handles addresses and packet ACK

Hardware SPI and UART

Compatible with Enhanced ShockBurst protocol from Nordic Semiconductor

Low Noise Amplifier (LNA) + Radio power amplifier giving 20dBm output power

RPSMA connector

Can be powered with up to 13V via expansion header

FROM
50 EUR

 **seeed**
The IoT Hardware Enabler





nRF52840 USB Dongle

USB 2.4GHz transceiver next generation

The nRF52840 Dongle is a small, low-cost USB dongle that supports Bluetooth 5, Bluetooth mesh, Thread, ZigBee, 802.15.4, ANT and 2.4 GHz proprietary protocols. The Dongle is the perfect target hardware for use with nRF Connect for Desktop as it is low-cost but still support all the short range wireless standards used with Nordic devices. The dongle has been designed to be used as a wireless HW device together with nRF Connect for Desktop. For other use cases please do note that there is no debug support on the Dongle, only support for programming the device and communicating through USB.

It is supported by most of the nRF Connect for Desktop apps and will automatically be programmed if needed. In addition custom applications can be compiled and downloaded to the Dongle. It has a user programmable RGB LED, a green LED, a user programmable button as well as 15 GPIO accessible from castellated solder points along the edge. Example applications are available in the nRF5 SDK under the board name PCA10059. The nRF52840 Dongle is supported by nRF Connect for Desktop as well as programming through nRFUtil.

Specifications

Small and low-cost USB dongle

Supports BLE, Thread, ZigBee, 802.15.4, ANT, and 2.4GHz

15 GPIO and interfaces available on castellated edge soldering points

1 programmable RGB LED

1 programmable green LED

1 programmable button

Updatable through USB DFU

FROM
9 EUR

M MOUSER
ELECTRONICS





nRF52840 with antenna Smaller nRF52840 with external antenna

The nRF52840 Dongle can be used as a development platform for the nRF52840 SoC. It features user configurable LEDs and a button. In addition to radio communication, the nRF5240 SoC can communicate with a computer through USB. The USB dongle is very similar with Nordic's USB dongle PCA10059. But it has less pinouts and button. The nRF528540 Dongle is equipped with a LED (LED1), a multicolor RGB LED (LED2), a user configurable button (SW1). The LEDs and button are connected to dedicated I/Os on the nRF52840 SoC. The USB dongle nRF52840 is flashed with Adafruit nRF52 Bootloader and "BLE Peripheral Blink" from nRF5 SDK examples default.

Specifications

nRF52840 flash-based ANT/ANT+™, Bluetooth Low Energy SoC solution

Supports BLE, Thread, ZigBee, 802.15.4, ANT, and 2.4GHz

Button and LEDs for user interaction

Onboard USB bootloader with buttonless support (Adafruit nRF52 Bootloader)

Super Small Form Factor

USB support

FROM
12 EUR





nRF52840 with e-paper

Another nRF 2.4 device with display

With the exploding number of connected devices being deployed, power consumption is a major concern. Technologies like BLE (Bluetooth Low Energy) are built from the ground up with low power consumption in mind. Another technology which is extremely low power is the e-paper display, which was made famous by its adoption by Amazon for the Kindle devices. Papyr from Electronut labs combines these two core ideas - a low power wireless technology combined with a low power display system. By choosing the Nordic nRF52840 SoC, Papyr is able to support not only BLE but mesh networking protocols like Thread, BLE Mesh, and Zigbee. Papyr has many extras too - like build in NFC antenna for BLE pairing or Thread commissioning, CR2477 battery holder, micro USB port, extra GPIOs, RGB LED, etc. There are a lot of applications possible with Papyr - dynamic price tags, for example, or sensor data display in a mesh network. Papyr can be used anywhere you need a low power, connected display.

Specifications

Raytac MDBT50 module with Nordic nRF52840 with BLE/802.15.4 SoC

Micro USB (device)

USB/Battery power switch

SWD Programming header

Extra GPIOs

1.54 inch 200x200 pixel red/black/white e-paper display

Push button

CR2477 coin cell holder

RGB LED


NFC (PCB) antenna

FROM
39 EUR



RF

SDR, cars, garages, satellite, GSM, LTE

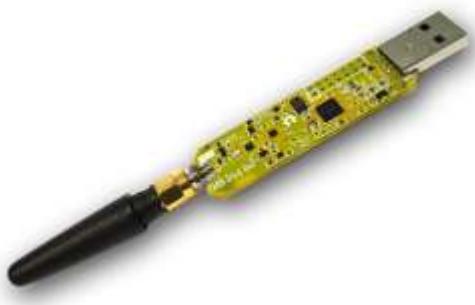

Yardstick **Sub GHz radio stick**

YARD Stick One (Yet Another Radio Dongle) can transmit or receive digital wireless signals at frequencies below 1 GHz. It uses the same radio circuit as the popular IM-Me. The radio functions that are possible by customizing IM-Me firmware are now at your fingertips when you attach YARD Stick One to a computer via USB. YARD Stick One comes with RfCat firmware installed, courtesy of atlas. RfCat allows you to control the wireless transceiver from an interactive Python shell or your own program running on your computer. YARD Stick One also has CC Bootloader installed, so you can upgrade RfCat or install your own firmware without any additional programming hardware. An antenna is not included. ANT500 is recommended as a starter antenna for YARD Stick One. This tool has been used in various attacks and PoC about Wireless keys (cars and others) hacking.

Specifications

half-duplex transmit and receive

official operating frequencies: 300-348 MHz, 391-464 MHz, and 782-928 MHz

unofficial operating frequencies: 281-361 MHz, 378-481 MHz, and 749-962 MHz

modulations: ASK, OOK, GFSK, 2-FSK, 4-FSK, MSK

data rates up to 500 kbps

Full-Speed USB 2.0

SMA connector for external antennas such as ANT500

receive amplifier for improved sensitivity

transmit amplifier for higher output power

strong RF performance across the entire operating frequency range

low pass filter for elimination of harmonics when operating in the 800 and 900 MHz bands

antenna port power control for compatibility with antenna port accessories designed for HackRF One

GoodFET-compatible expansion and programming header

GIMME-compatible programming test points

FROM
120 EUR





Ubertooth One

The best Bluetooth hacking device

Ubertooth One is an open source 2.4 GHz wireless development platform suitable for Bluetooth experimentation. The Ubertooth One is an opensource Bluetooth test tool from Michael Ossmann. It is the world's first affordable Bluetooth monitoring and development platform and is a fully open source product (both hardware and software). There are some cases available for it, since it doesn't include a case. I recommend getting the aluminium case in order to isolate it from interferences and to protect it from fingers. More info:

<https://www.davidsopas.com/tag/ubertooth/>

Specifications

2.4 GHz transmit and receive.

Transmit power and receive sensitivity comparable to a Class 1 Bluetooth device.

Standard Cortex Debug Connector (10-pin 50-mil JTAG).

In-System Programming (ISP) serial connector.

Expansion connector: intended for inter-Ubertooth communication or other future uses.

6 indicator LEDs.

RP-SMA RF connector: connects to test equipment, antenna, or dummy load.

CC2591 RF front end.

CC2400 wireless transceiver.

LPC175x ARM Cortex-M3 microcontroller with Full-Speed USB 2.0.

USB A plug: connects to host computer running Kismet or other host code.

Get the NoElec aluminium case for it!

FROM
155 EUR



RF

SDR, cars, garages, satellite, GSM, LTE



APImote v.4b

Hacking Zigbee IoT protocol

The ApiMote is a ZigBee security research hardware intended for researchers, students, utility companies, etc. to use for learning about and evaluating the security of IEEE 802.15.4/ZigBee systems as authorized. ApiMote is pre-flashed with KillerBee firmware, so all you need to do is simply plug in to your system and use the KillerBee utilities to start your research. The ApiMote hardware is designed and developed by River Loop security and the project is open-source available here:

<https://github.com/riverloopsec/apimote>

Specifications

2.4 GHz IEEE 802.15.4 Compliant and ZigBee™ Ready RF Transceiver (CC2420)

Interoperability with other IEEE 802.15.4 devices

16-Bit Ultra-Low-Power MCU (116kB Flash, 8KB RAM) (MSP430F2618), featuring Integrated ADC, DAC, Supply Voltage Supervisor, and DMA Controller

FTDI USB-to-Serial IC

Programming and data collection via USB

Integrated on-board antenna

Low current consumption

Hardware link-layer encryption and authentication is supported

Optional SMA antenna connector

FROM
150 EUR

 GATTIFY STORE



RF

SDR, cars, garages, satellite, GSM, LTE



Freakduino 2.4 GHz Good alternative for Zigbee protocol

The FreakLabs Freakduino v3.0a is designed for rapid prototyping, experimentation, and deployment of wireless designs at low cost. It combines the ease-of-use of the Arduino IDE, compatibility with a rich assortment of third-party peripherals and libraries, and an integrated wireless radio for an inexpensive wireless prototyping system. The addition of an integrated wireless radio based on the IEEE 802.15.4 protocol (same radio protocol as the XBee) allows for wireless control of devices or wireless sensor data collection. It is also available in a long-range version with improved TX power (150mW).

Battery circuitry was added so that it could function as a true wireless node without any external power cables. The chibiArduino wireless protocol stack was designed specifically for this board. It has a simple programming interface and small memory footprint and was designed to enable Arduino users to start communicating wirelessly quickly and easily. Rather than deal with complex networking software with other wireless devices, you can start transmitting with the Freakduino using only the init, send, and receive library commands.

More info in:

<https://freaklabs.org/freakduino-v3-0-hardware-user-guide/>

Specifications

2.4 GHz Wireless 802.15.4 Radio

Battery Regulation and Operation

Lasts Months on 2 AA Batteries

Compatible with Arduino shields and libraries

FROM
27 EUR

FREAKLABS STORE
OPEN SOURCE WIRELESS



RF

SDR, cars, garages, satellite, GSM, LTE



Parani UD100

Bluetooth device with higher power

The Parani-UD100 is a class 1 type Bluetooth USB adapter that supports 300 meters of wireless transmission distance by default. With Patch antennas the distance can reach up one kilometer in open space. The working distance can be further extended up to 1000 meters using optional replacement antenna. Thanks to its longer communication distance than other regular Bluetooth USB adapters, it is suitable for industrial or special applications. Parai-UD100 is compatible with other SENA Bluetooth devices perfectly. Try this software tool:

https://github.com/pwnieexpress/blue_hydra

Specifications

Supports Bluetooth stack v4.0

USB 2.0

Supports Bluetooth DUN, FAX, SPP, HID, FTP, OPP, SDP, HCRP, LAN, OBEX FTP, OBEX OPP, OBEX BIP, BIP, AVRCP, A2DP, HSP, HFP, PAN, BPP, Headset, AVCTP, AVDTP, HDP, Find Me, Proximity, Health Thermometer, Heart Rate, HID OVER GATT profiles

Supports up to 7 simultaneous connections

Easy to use Windows configuration tool available

Bluetooth driver needed (Bluesoleil based driver)


Easy to use Windows configuration tool available

Working distance (In an open field): Normally 300 meters, up to 600 meters using 5 dipole antenna

Accessible RP-SMA antenna connector for switching to other antenna types

FROM
40 EUR



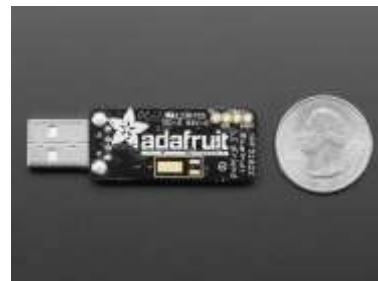

Bluefruit LE Sniffer

BLE sniffer compatible with Wireshark

Interested in learning how Bluetooth Low Energy works down to the packet level? Debugging your own BLE hardware, and trying to spot where something is going wrong? Or maybe you're writing a custom application for your phone or tablet that needs to talk to existing BLE hardware, but you don't know how it works beneath the surface? This Bluefruit LE Friend is programmed with a special firmware image that turns it into an easy to use Bluetooth Low Energy sniffer. You can passively capture data exchanges between two BLE devices, pushing the data into Wireshark, the open source network analysis tool, where you can visualize things on a packet level, with useful descriptors to help you make sense of the values without having to crack open the 2000 page Bluetooth 4.0 Core Specification every time. Please Note: You can only use this device to listen on Bluetooth Low Energy devices! It will not work on Bluetooth (classic) devices. Firmware V2 is an improved firmware from Nordic now has better Wireshark-streaming sniffer software that works with all OS for live-streamed BLE sniffing. The sniffer firmware cannot be used with the Nordic DFU bootloader firmware, which means that if you want to reprogram this device you must use a J-Link (and a SWD programmer board). You cannot over-the-air (OTA) reprogram it.

Specifications

Nordic nRF51822 SoC

USB 2.0

Supports BLE profiles: Proximity Profile; Heart Rate Profile; Health Thermometer Profile; Blood Pressure Profile; Running Speed & Cadence Profile; HID Over GATT Profile; Alert Notification Profile; Glucose Profile; Cycling Speed & Cadence Profile

2.4GHZ transceiver (-93dbm sensitivity in Bluetooth low energy mode) TX Power -20 to +4dbm

ARM Cortex – M0 32 bit processor - Serial Wire Debug (SWD)

256kb or 128kb embedded flash programmed memory

16kb RAM or 32kb RAM


Tutorial: <https://learn.adafruit.com/introducing-the-adafruit-bluefruit-le-sniffer/introduction>

FROM
25 EUR



RF

SDR, cars, garages, satellite, GSM, LTE



RF power meter Measuring RF output power

Many times I've just wanted to check if the RF output power emissions were adjusted to the legality, or just if the manufacturer's announced RF power was right. This is the tool to check the ERP (Emitted Radiated Power) of any RF device working in the supported frequencies. Today, most OS limit the output power of Wi-Fi devices patching the driver in real time. It's very difficult to know what the emitted power of any Wi-Fi device is exactly. With this tool you will be able to do it!


Specifications

| | |
|--------------------------------|--|
| Power Level: | -20dBm up to +30dBm |
| Calibrated Frequencies: | 35, 72, 433, 1200, 2400, 5600-6000MHz in 50MHz steps |
| Accuracy: | +/- 0.5dB |
| Attenuator: | 30dB (Internal) |
| Battery: | 3.7V Lithium Ion cell, 10440 size, 320mAh |
| Current Consumption: | ~35mA |
| Battery Life: | ~8 hours |
| Auto Shutdown: | 5 minute timeout |
| Charging: | Micro USB cable |
| Display: | OLED, 128x64 pixels, monochrome |
| User Input: | Joystick |
| Interfaces: | USB, power control via CDC |
| Antenna: | 5.8GHz 'Sniffer Antenna' (linearly polarized ~2dBi dipole) |
| Adapter: | Male to Male SMA adapter |

FROM
89 EUR

Banggood.com Shopping with fun
Best Bang For Your Buck



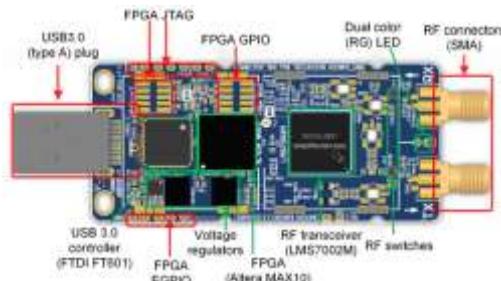

Lime SDR mini

Another high RF quality SDR device

The “LimeSDR Mini” development board is a hardware platform for developing and prototyping high-performance and logic-intensive digital and RF designs that use Altera’s MAX 10 FPGA and Lime Microsystems’ LMS7002M RF transceiver. Simply put, the LimeSDR Mini is a smaller, less expensive version of the original LimeSDR. However, it still packs a punch - at its core, the LimeSDR Mini uses the same LMS7002M radio transceiver as its big sibling. The Mini has two channels instead of four, and, by popular demand, SMA connectors instead of micro U.FL connectors.

The LimeSDR Mini platform gives students, inventors, and developers an intelligent and flexible device for manipulating wireless signals, so they can learn, experiment, and develop with freedom from limited functionality and expensive proprietary devices.

Specifications

| | |
|-------------------------------------|---|
| RF transceiver: | Lime Microsystems LMS7002M |
| Frequency Range: | 10 MHz - 3.5 GHz |
| RF Bandwidth: | 30.72 MHz @ 12 bit |
| Duplex: | Full (1xTX/1xRX) |
| FPGA: | Intel Altera MAX 10 (10M16SAU169C8G) |
| EEPROM memory: | 2 x 128 KB for RF transceiver MCU firmware and data |
| Flash memory: | 1 x 4 MB flash memory for data |
| General user inputs/outputs: | 2 x dual color (red + green) LED, 8 x FPGA GPIO pinheader (3.3 V) |
| Connectivity: | USB 3.0 Type-A (FTDI FT601 controller) 2 x coaxial RF (SMA) connectors U.FL connector for external clock source FPGA GPIO headers and JTAG connector |
| Clock system: | 30.72 MHz onboard VCTCXO |
| Board dimensions: | 69 mm x 31.4 mm (20 grams) |

FROM
159 EUR

CROWD SUPPLY



RF

SDR, cars, garages, satellite, GSM, LTE




USRP B205mini-i Ettus research mini professional SDR


The USRP™ B205mini-i delivers a 1×1 SDR/cognitive radio in the size of a business card. With a wide frequency range from 70 MHz to 6 GHz and a user-programmable, industrial-grade Xilinx Spartan-6 XC6SLX150 FPGA, this flexible and compact platform is ideal for both hobbyist and OEM applications. The RF front end uses the Analog Devices AD9364 RFIC transceiver with 56 MHz of instantaneous bandwidth. The board is bus-powered by a high-speed USB 3.0 connection for streaming data to the host computer. The USRP B205mini-i also includes connectors for GPIO, JTAG, and synchronization with a 10 MHz clock reference or PPS time reference input signal. The USRP Hardware Driver™ (UHD) software API supports all USRP products and enables users to efficiently develop applications then seamlessly transition designs between platforms as requirements expand.

Specifications

- Wide frequency range: 70 MHz – 6 GHz
- Up to 56 MHz of instantaneous bandwidth
- Full duplex operation
- User-programmable, industrial-grade Xilinx Spartan-6 XC6SLX150 FPGA
- Fast and convenient bus-powered USB 3.0 connectivity
- Synchronization with 10 MHz clock reference or PPS time reference
- GPIO and JTAG for control and debug capabilities
- 83.3 x 50.8 x 8.4 mm form factor
- USRP Hardware Driver™ (UHD) open-source software API version 3.9.2 or later
- GNU Radio support maintained by Ettus Research™ through GR-UHD

FROM
942 EUR



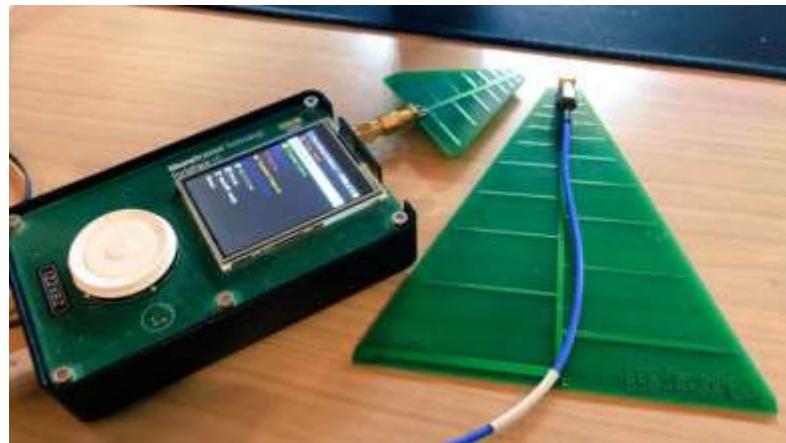

Log Periodic Antenna

Made for a high range of freqs

The high gain directional wideband antenna is suitable for directional radio signal transmission and reception, signal source reconnaissance and direction finding, broadband signal testing and the like. The antenna is suitable for UWB positioning module, WiFi2.4G and 5.8GHz and other common frequencies.

Specifications

Frequency range: 2.4GHz-10.5GHz

Dimensions: 100mm*85mm

Polarization mode: linear polarization

Rated gain: 7dBi

Return loss: 10dB

Power capacity: 8W

Interface form: SMA female head (outer screw inner hole)

FROM
11 EUR

Banggood Shopping with fun
.COM Best Bang For Your Buck





Sub 1 GHz telescopic antenna

The antenna for HackRF and yardstick

ANT500 from Great Scott Gadgets is a telescopic antenna designed for operation from 75 MHz to 1 GHz. Its total length is configurable from 20 cm to 88 cm. ANT500 is constructed of stainless steel and features an SMA male connector, rotating shaft, and adjustable elbow. ANT500 is a 50 ohm general purpose antenna. It is the perfect first antenna for use with HackRF One or YARD Stick One.

Specifications

| | |
|------------------|----------------------------|
| Frequency Range: | 75 MHz – 1000 MHz |
| Impedance: | 50 Ohm |
| Connector: | SMA male |
| Material: | Stainless steel |
| Length: | (telescopic) 20 cm – 88 cm |
| Type: | Omnidirectional |
| Mode: | Reception only |

FROM
35 EUR

BEGINNER'S
CHOICE



RF

SDR, cars, garages, satellite, GSM, LTE



400MHz-4GHz 1W RF amplifier High linearity multipurpose amplifier

If you are going to work with SDR in real environments you'll need to generate a strong enough signal to be transmitted for your RF PoCs. Depending on the frequency you are going to transmit, it will be necessary to choose the right amplifier for it. Many times you can search for a multipurpose amplifier that works in a very wide range of frequencies and bands. This model does not offer professional specifications but it can be used for your tests and the price is very low. The typical applications for this kind of RF amplifier are:

- Repeaters
- transceivers
- high power amplifiers
- CDMA/WCDMA/LTE
- General purpose wireless

Specifications

400-4000MHz range

16.5 dB gain @ 2140 MHz

DC 5V power supply (235mA current)

Internal RF overdrive protection

Internal DC overvoltage protection

On chip ESD protection

TQP7M9103 chip based – 3 pin SOT-89 package type

17 dB @ 1 GHz

Heat sink for continuous operation


FROM
12 EUR

AliExpress®



RF

SDR, cars, garages, satellite, GSM, LTE

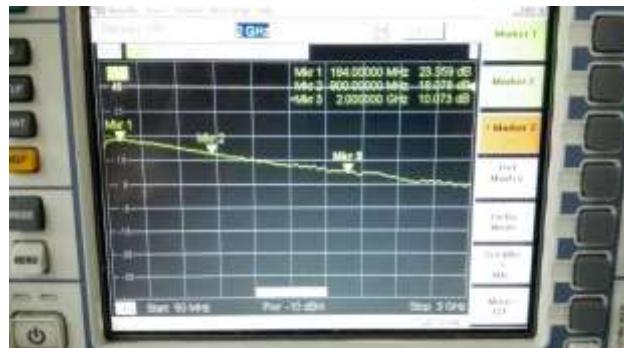

Low Noise RF Amplifier High linearity LNA

This is another multipurpose RF amplifier that offers high linearity and low noise amplification (LNA) for many kind of RF POCs. This model is based on the SPF-5189Z RF amplifier chip, which works between 50MHz and 4GHz with a maximum power amplification of 22.7 dBm at 1960 MHz. This chip offers ultra-low noise amplification with noise levels about 0.6 dB at 900 MHz. The linearity of an LNA is a measure of its ability to amplify the signal without distortion. When an LNA is operating linearly, the output power in dB is the sum of the input signal and the gain. However, as the input signal level increases beyond a certain point, the output starts to level off and the LNA is no longer linear.

- Cellular, PCS, W-CDMA, ISM, WiMAX Receivers
- PA Driver Amplifier
- Low Noise, High Linearity Gain Block Applications

Specifications

SPF-5189Z 50MHz-4000MHz

Gain=18.7dB at 900MHz

High Linearity: OIP3=39.5dBm at 1960MHz

P1dB=22.7dBm at 1960MHz

Single-Supply Operation: DC 5V at IDQ=90mA

Flexible Biasing Options: 3V to 5V, Adjustable Current

Noise figure: 0.6dB at 900MHz

Dimensions: 50mm * 30mm



FROM
16 EUR

AliExpress[®]



RF

SDR, cars, garages, satellite, GSM, LTE

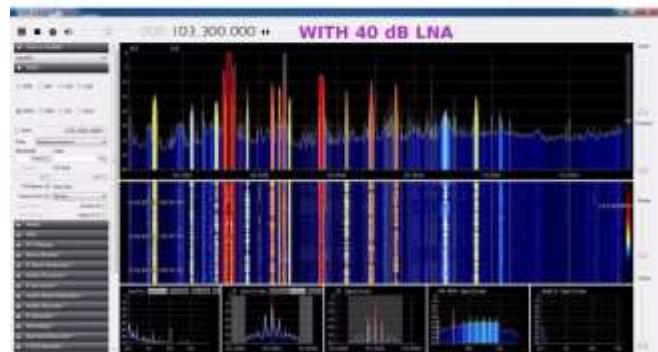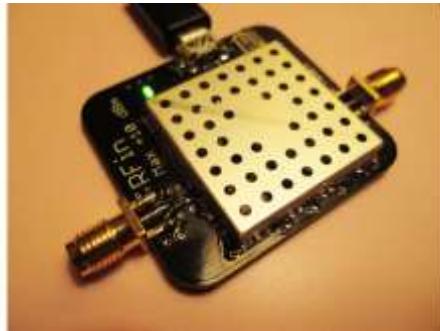

LNA 10MHz to 8000MHz RF Amplifier with up to 40 dB gain

A low noise amplifier (LNA) is an electronic device that amplifies weak signals at its input without adding significant noise. These amplifiers are typically used in receivers. This is a wideband low noise amplifier that provides excellent gain (35-40 dB between 100 MHz and 2 GHz) and noise figure (3 dB at 2 GHz). The LNA is very general purpose and can be used in a number of different applications such as Ham Radio, TV reception, etc., where the USB power supply means you can power it off your laptop. Our design is unique as it provides broadband performance from 10 MHz to 8 GHz at a fraction of the cost of similar LNAs. As well, all our products are made with genuine ICs sourced directly from the manufacturer and reliable distributors.

Specifications

Wideband LNA operates from 10 MHz to 8 GHz

USB-powered; includes pads for external DC power

2.9 dB Noise Figure at 2 GHz

PCB edge-mount connectors are SMA-F

Maximum RF Input Power: +10 dBm

Amplification: 10 MHz @ 30 dB

100 MHz @ 40 dB

3 GHz @ 31 dB

5 GHz @ 26 dB

9 GHz @ 10 dB

Physical Dimensions: 1.5" x 1.7"


FROM
420 EUR

nuand



RF

SDR, cars, garages, satellite, GSM, LTE

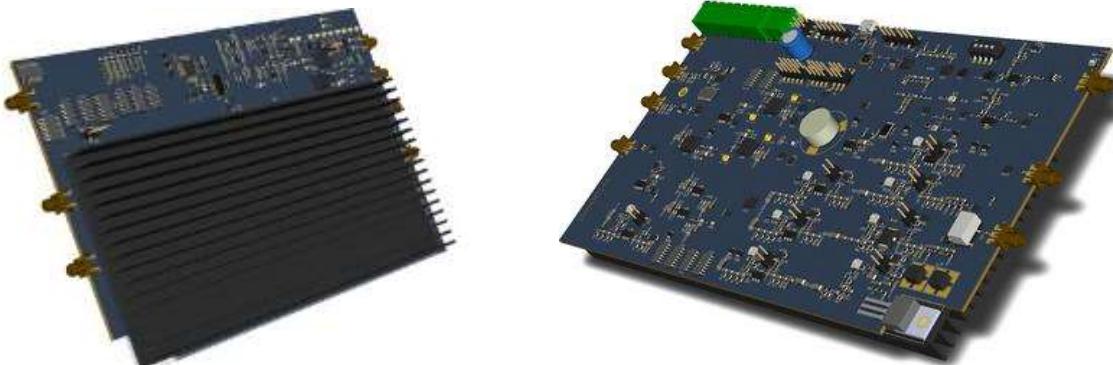

Lime RFE

Soft-Definable RF Front End for LimeSDR

The Lime RF Front End (LimeRFE) is an open hardware power amplifier (PA) module with appropriate filtering and support circuitry to augment the LimeSDR, LimeSDR Mini, and LimeNET Micro platforms, providing a complete solution that addresses real life applications ranging from HAM radio to standards-compliant cellular network implementations. A single LimeRFE covers three very different sets of bands: HAM, cellular, and wideband. The exact band used at any given time is software-selectable. By making the RF front end definable in software, LimeRFE is the next step in the evolution of software-defined radio. You can see a real test in: <https://www rtl-sdr com/limerfe-wspr-tests/>

LimeRFE will enhance any LimeSDR based wireless project by providing:

- A stronger, clearer signal when transmitting
- Less noise when receiving
- Improved range for both

Specifications

Each band has appropriate filtering both for RX & TX. Selectable AM/FM notch filter

Programmable via Arduino IDE

Arduino Nano-compatible microcontroller (ATmega328)

FT232RL USB-to-serial converter

Host serial connection via USB mini Type B connector

1 – 4000 MHz power & SWR meter (external directional coupler required)

Cellular bands Tx power meter (internal coupler)

Single 12 V supply

Optionally supply microcontroller and Rx channels via USB

FROM
599 EUR

CROWD SUPPLY





Alfa AW-USO36NHA

The best 2.4 GHz Wi-Fi 802.11n device

This is the most versatile Wi-Fi card in the market for the last many years. It supports monitor mode for the most Linux distributions, like Kali Linux, Debian and others. It also supports Windows OS, permitting with it driver and utility to create AP devices on it. In Kali OS all the operating modes are supported (Fake AP, multiple APs, monitor mode, managed mode) and quite all the hacking tools in the market have support for it. The only limitation with this card is that it doesn't support 5 GHz frequencies.

Specifications

| | |
|---------------------------|---|
| Standards: | Wireless: IEEE 802.11b/g/n |
| Data Rate: | 802.11b: UP to 11Mbps , 802.11g: UP to 54Mbps, 802.11n: UP to 150Mbps |
| Interface: | USB 2.0 mini USB |
| Antenna connector: | 1 x 2.4Ghz RP-SMA connector |
| Chipset: | Atheros AR9271 |
| Included antenna: | 5dBi 2.4GHz Antenna |
| Freq. Range: | 2.412 ~ 2.483 GHz |
| Channels: | 1-11 channels (North America), 1-13 channels (General Europe) |
| Output power: | 802.11b @ 29dBm , 802.11g @ 27dBm, 802.11n @ 27dBm |
| Sensitivity: | 11b: 96dBm @ 1Mbps, 11g: 91dBm @ 6Mbps, 11n @ 91dBm |
| Modulation: | BPSK,QPSK, CCK and OFDM |
| Voltage: | Voltage: 5V+5% |

FROM
35 EUR

BEGINNER'S
CHOICE

ALFA
NETWORK



Wi-Fi

Wi-Fi cards, antennas



Alfa AWUS036ACH

The best 2.4 / 5 GHz Wi-Fi 802.11ac device

Wide range 802.11ac dual band USB wireless adapter AWUS036ACH brings extreme distances and with blazing speed to your Mac or Windows computers in your Wi-Fi network. Up to 300Mbps for 2.4GHz network and up to 867Mbps for 5.0GHz network, AWUS036ACH connects to your PC with USB 3.0 with AC1200 Wi-Fi technology to provide superb performance. Inheriting years of experiences in wireless industry, ALFA AWUS036ACH is built with latest 802.11ac standards, plus high-sensitivity dual band antennas, resulting in extraordinary signal strength and coverage. No more signal dead zone in your living space when streaming HD video, downloading large files or surfing on the web. Dual Band AC1200 support.

Specifications

| | |
|-------------------|---|
| Interface | USB 3.0 Micro-B |
| Antenna Connector | Detachable RP-SMA female connector |
| Antenna | 2x High-sensitivity dual-band dipole antenna |
| Standards | Wireless IEEE 802.11a, IEEE 802.11b, IEEE802.11g, IEEE 802.11n, IEEE 802.11ac |
| Frequency | 2.4GHz / 5GHz |
| Security | WEP 64/128 bit, WPA-PSK,WPA2-PSK,Cisco CCX |
| Supported OS | Windows, MacOS, Linux |

FROM
55 EUR

ALFA
NETWORK





4 Watt 2.4 GHz amplifier Wi-Fi / Bluetooth booster

This 4W amplifier can be very useful for some kind of Wi-Fi / Bluetooth attacks, where you need extra RF power, because you are too far away from your target or because you want to give the best coverage and power. But remember that power is not everything, and that you also need to have good quality interfaces. Also you have to take care in which situations you use it because so powerful transmissions are illegal all over the world.

Specifications

| | |
|-------------------------------|---|
| Operation Range: | 2400-2500 MHz |
| Operation Mode: | Bi-directional, half-duplex, Auto-Switching via carrier sensing |
| Frequency Response: | ± 1dB over operation range |
| Receiver gain: | 10dB |
| Transmitter gain: | 13 dBi |
| Max. transmit power: | 36 dBm |
| Noise figure: | < 2.5 dB |
| EVM: | 3%@28dBm 802.11g 54Mbps OFDM 64QAM BW 20MHz |
| Connector: | SMA Receptacle, 50 ohm |
| Receive Noise Figure: | 3.0dBm nominal |
| Operating Temperature: | -40 to 70 degree |
| Operating Humidity: | Up to 95% relative humidity |
| Material: | Cast Aluminium |
| Dimensions: | 85x50x21 mm |
| Operation voltage: | 6-16V (power supply included) |

FROM
25 EUR

AliExpress™



Wi-Fi

Wi-Fi cards, antennas



RF connector adapter kit You will never lose a RF connection

Widely used for Antennas, Broadcast, Radios, Telecom, Coaxial cable, LMR, CCTV, microwave applications and digital communication system requiring high performance use in all citizens band communication systems, CCTV, mobile radio equipment, ship to shore communications, landing systems and ground control apparatus. Connector Adapter Kit helps technicians and engineers simplify their connecting needs allowing making on the spot connections in just seconds. Kit includes 20 types of reusable coax connectors -- BNC/F/N/SMA/TNC/UHF/-- for male and female adapters that can be used in different combinations to fit most any installation. Simply screw to the connector or other device, then it can be work.

Specifications

N Type to SMA Series: N female to SMA female, N female to SMA male, N female to SMA female panel mount, N male to SMA male, N female to SMA female, N male to SMA male panel mount

BNC to SMA Series: BNC male to SMA male, BNC male to SMA female, BNC female to SMA male, BNC female to SMA female


N Type to RP SMA Series: N female to RP SMA male, N female to RP SMA female, N male to RP SMA male, N male to RP SMA female

Other Series: N male to BNC male, N male to BNC female connector, N female to N female, N male to F female, BNC male to F female, SMA female to TNC female

FROM
30 EUR

amazon



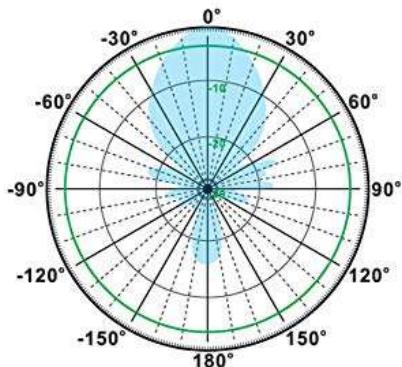

2.4GHz/15dBi yagi antenna

If you need to get far away, you need it

Wireless yagi Antenna TP512 in most cases cannot be attached directly to the device (Wi-Fi router, signal booster, etc.) without some type of cable converter/adapter. This Antenna has N-Female cable/connector so it will need the cable/converter from N-Female type to [your device connector type], usually to some pigtail coax RP-SMA cable connector. Also, you can put amp of some kind or signal booster between device and antenna.

Specifications

| | |
|-------------------------------|------------------------|
| Frequency: | 2400-2483 MHz |
| Gain: | 15 dBi |
| VSWR: | <1.5:1 |
| Polarization: | Horizontal or Vertical |
| Horizontal Beamwidth: | 30° |
| Vertical Beamwidth: | 25° |
| F/B Ratio: | >16 dB |
| Max Input Power: | 100 W |
| Lightning Protection: | DC Ground |
| Connector: | N Female |
| Dimensions: | 24.81in |
| Weight: | 0.93 lbs |
| Length: | 9.45in |
| Reflector Material: | Aluminium Alloy |
| Mast Size: | Ø40-Ø50mm |
| Rated Wind Velocity: | 210km/h |
| Operating temperature: | -40~+65C |

FROM
30 EUR

amazon



Wi-Fi

Wi-Fi cards, antennas



2.4 GHz/9 dBi omni antenna A good solution to upgrade your horizons

This Wi-Fi Antennas will significantly increase the range and strength of your Wi-Fi signal. It is only supported for indoor use. This Omni-directional antenna is a direct replacement for the antenna/s that comes standard with your router, access point, VoIP device, or PCI card. Each Antenna is Omni-directional, no aiming is required - it can send and receive Wi-Fi in all directions. This Antenna is stronger than the less powerful booster antennas offered by major manufacturers.

Specifications

| | |
|-------------------------------|----------------------------|
| Gain: | 9dBi |
| Frequency Range: | 2.4Ghz & 5Ghz |
| SWR: | ≤ 2.0 |
| Polarization: | Linear Vertical |
| Impedance: | 50 Ω Nominal |
| Direction: | Omni-directional |
| Connector: | RP-SMA Male |
| Dimension (mm): | 39 cm x 1,5 cm |
| Net Weight: | 50g |
| Operating temperature: | -20°C ~ + 60°C |
| Storage temperature: | -30°C ~ + 75°C |
| Operating Humidity: | 0% to 85% (non-condensing) |

FROM
10 EUR

BEGINNER'S
CHOICE

amazon



Wi-Fi

Wi-Fi cards, antennas



Wi-Fi deauther

The best 2.4 GHz Wi-Fi 802.11n device

While a jammer just creates noise on a specific frequency range (i.e. 2.4 GHz), a deauthentication attack is only possible due to a vulnerability in the Wi-Fi (802.11) standard. The deauther does not interfere with any frequencies, it is just sending a few Wi-Fi packets that let certain devices disconnect. That enables you to specifically select every target. A jammer just blocks everything within a radius and is therefore highly illegal to use. This ESP8266 based development board comes with an integrated 18650 charging system, OLED display and a 3-axis slide switch. It comes installed with the latest ESP8266 Deauther software. Using this device you can perform different attacks to test Wi-Fi networks. Please note that the ESP8266 only supports 2.4GHz. There are many different models available, since the creator's supported device is branded as DSTIKE. For more details on the software, visit:

http://github.com/spacehuhn/esp8266_deauther

Specifications

Only 100mA power usage

Up to 35h of battery life with a 3500mAh 18650 cell

Up to 2A charging current

Up to 2.8A output current

Included 8dB antenna

4 LEDs to indicate battery status in real time

Power button: Click to turn on, double click to turn off

Protection: short, over charging, over discharging, temperature

Board ESP8266

Display: SH1106 1.3" OLED

Wi-Fi 2.4 GHz support & Included 8dB antenna and 2dB antenna

FROM
8 EUR

AliExpress



Wi-Fi

Wi-Fi cards, antennas



Wi-Fi PCB antenna 2.4GHz/5GHz PCB 8dBi antenna

This is a dual band (2.4/5GHz) antenna valid for any Wi-Fi application. It is widely used for projects like Wi-Fi deauther, increasing the range of any standard Wi-Fi device. This kind of antenna is ideal for using them inside any cased project to avoid having external antennas in outdoor projects. Inside any ABS / PVC box it won't lost much signal and you will boost the Wi-Fi range, extending your coverage area.

Specifications

| | |
|----------------------|-------------------------------|
| Frequency: | 2400-2500 MHz & 4900-5900 MHz |
| SWR | <= 1.8 |
| Antenna gain: | 8 dBi |
| Polarization: | linear |
| Impedance: | 50 Ohm |
| Material: | PCB |
| Cable type: | OD 1.3 mm |
| Cable length: | 150 mm |
| Connector type: | IPEX / UFL |
| Connector pull test: | 1 Kg |


FROM
8 EUR

AliExpress



RFID & NFC

Physical access, cards, magnetic stripe, cars

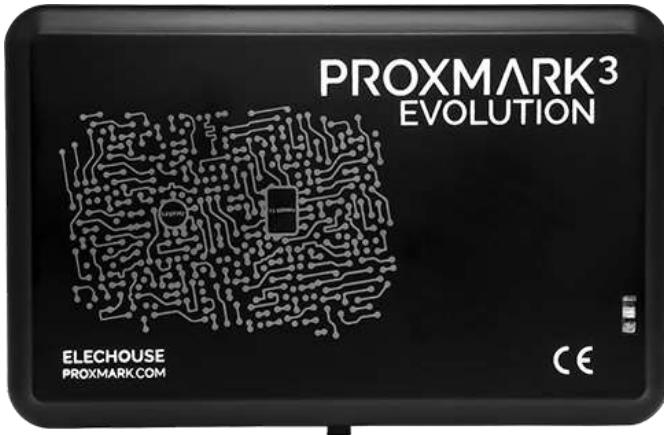

Proxmark3-EVO

Latest and most powerful NFC device

The Proxmark 3 is a dedicated, highly-capable multi-tool for RFID analysis, providing reading, writing, analysis, snooping, replaying, emulation, modulation, demodulation, decoding, encoding, decryption, encryption for any RFID system operating in the 125/134 KHz (LF) and 13.56 MHz (HF) frequencies. The EVO has been designed and optimised for desktop users and hobbyists. If you are looking for Proxmark 3 for Penetration Testing, please consider the Proxmark 3 RDV4.

Specifications

| | |
|----------------------------|--|
| CPU: | AT91SAM7S512 |
| Memory: | External 2MBits Internal 512Kb SPI |
| Pre-tuned LF Antenna | 125KHz & 134KHz (Internal) |
| LF read range: | 40mm @ 55V |
| Pre-tuned HF Antenna | 13.56MHz (Internal) |
| HF Read Range: | 50mm @ 40V |
| Case material: | ABS |
| LED: | 1x RGB LED |
| Included RFID Tags / Cards | 1x 1k / S50 Card - PVC Card format 1x 'Magic' 1k UID Changeable - PVC Card format 1x HID Tag - PVC Card format 1x T5577 Tag - PVC Card format |

FROM
275 EUR



LAB|401



RFID & NFC

Physical access, cards, magnetic stripe, cars



Proxmark3-RDV4 Last and most powerful NF device

The Proxmark 3 is a dedicated, highly-capable multi-tool for RFID analysis, providing reading, writing, analysis, snooping, replaying, emulation, modulation, demodulation, decoding, encoding, decryption, encryption for any RFID system operating in the 125KHz-134KHz (LF) and 13.56MHz (HF) frequencies. The Proxmark 3 RDV4 is the latest revision of the Proxmark 3 Platform. It is designed and manufactured by RRG, a company formed by four people instrumental to the Proxmark 3 including:

Chris Hermann (iceman) - Moderator of the Proxmark forums

Kevin (0xFFFF) - Moderator of the Proxmark forums

The RDV 4 revision represents a highly optimised piece of hardware specifically designed for the pen-testing community. It is fully Android Compatible, working with Project Walrus for automated red-teaming

Specifications

| | |
|--|--|
| CPU: | SAM7S512 |
| Memory: External | 2MBits Internal 512Mb SPI |
| LF Read Range: | 70mm @ 65V |
| Pretuned LF Antenna | 125KHz & 134KHz (Internal) |
| HF Read Range: | 40 - 85mm @ 44V |
| HF Read Range (medium antenna): | 90mm |
| HF Read Range (large antenna): | 100 - 120mm |
| Pretuned HF Antenna | 13.56MHz (Internal) |
| RFID Tags / Cards | 1x 'Magic' 1k UID Changeable - PVC Card format 1x T5577 Tag - PVC Card format |
| SIM/SAM Reader | Internal with optional extension |
| Swappable Antennas | Optional Medium / Long range |

FROM
329 EUR



LAB|401





SIM/SAM Extension Proxmark3 RDV4 Secure Element/SIM adaptor

The new version of Proxmark3 family (RDV4) contains special features which might help to understand and analyse Chip-And-PIN cards. This new connector is “hidden” under the base case and can be implemented with the new version of the RDV4 repository based on iceman fork. The Proxmark 3 RDV4 has support for SIM/SAM debugging / programming / manipulation. The command is the “SC” (Smart Card). It has certain functions that can be used to take information from the chip. Specifically, I will write about how I did it manually using the raw command initially to extract data from financial chip credit cards. This method could be applied to many different SIM technologies to interact with the chips.

The SIM/SAM extension connects to the SIM/SAM slot on the Proxmark 3 RDV4. This module provides SIM (Subscriber Identity Module) and (Secure Access Module) support for various contact card systems that are really based on NFC technology. More info:

<https://salmg.net/2018/10/18/proxmark3-rdv4-extracting-data-from-chip-and-pin-cards/>

Specifications

SIM support

SAM support

Extender module

FROM
20 EUR



LAB|401



RFID & NFC

Physical access, cards, magnetic stripe, cars



Proxmark RDV4 Blue Shark Blue Shark and extended range antennas

Owning a Proxmark3 RDV4 means owning the most powerful and complete device for RFID / NFC (LF & HF) testing in the frequencies of 125KHz / 134KHz / 13.56MHz. Therefore, investing some more euros in upgrading it, it's not a bad idea. To improve its range you will be able to find the extended range antennas for LF and HF, giving some extra centimetres for reading cards and tags, what's something more than necessary.

Another new and nice upgrade for it, is the Blue Shark Bluetooth 2.0 upgrade, that permits controlling the proxmark3 wirelessly plus adding an external battery to create an autonomous proxmark3 that can be connected and controlled from your computer or smartphone. The Walrus NFC application has been updated to permit control by Bluetooth. It also fixes the high temperature concerns adding a metal cooler.

<https://www.patreon.com/posts/26897335>

Specifications

Battery capacity: 400 mAh

Standby time: 3.5h StandBy; 2.9h LF-On; 50min HF-On;

Charging Current: 200mA (plug in USB default charging)

Charging time: 2.5h

Bluetooth power: 4dBm, -85 dBm@2Mbps

Bluetooth distance: 6m (depending on the environment and device orientation)

Size and weight: 54.4mm * 29.4mm * 13.5mm 24g

FROM
89 EUR



LAB|401





Chameleon Mini Rev.E

Last and most powerful NF device

The Chameleon Mini rebooted is a powerful & portable NFC emulation & manipulation tool. This Chinese reader/writer is a cheap solution for those who don't want to spend much money for a developer's device. Smaller, faster, easier to use with an incredible battery life and extended features, while still retaining compatibility with the original firmware, it's a "Must-Have" tool for the RFID toolkit. Designed mainly for Windows, including two different GUIs for it. RevE does not copy cards. You can copy/dump cards with another reader device like proxmark3, and cheapest SLC3711 or ACR122 readers. It implements a **new NFC attack** against the reader to help decrypting Mifare cards that resist classic attack methods.

The code has become opensource during the last years:

<https://github.com/iceman1001/ChameleonMini-rebooted/>

<https://github.com/iceman1001/ChameleonMini-rebootedGUI>

Specifications

| | |
|--|---|
| Multiple Chipset Emulation | ASK+BPSK modulation, supporting ISO 14443, NFC, and ISO 1569 MIFARE Classic® 1K (4-bit and 7-bit UID) MIFARE Classic®4K (4-bit and 7-bit UID) MIFARE Ultralight® |
| Ability to emulate | MIFARE NTAG®,ICODE,MIFARE DESFire®,iCLASS,LEGIC,etc. |
| Read / Write / Sniff Operation | Holds up to 8 cards simultaneously, selectable on-the-fly Write stored cards to blank magic tags |
| UID Sniff | Sniff UIDs on the fly (allows for key generation or simple emulation) |
| UID Fuzzing / Manipulation | Ability to randomize UIDs for fuzzing and increment / decrement UID |
| Read / Write Lock | Allow stocked cards to be modified (Live mode) Prevent stocked cards from being modified (Unlimited credits mode) |
| Advanced Sniffing & Logging | Monitor bits on the RF interface |

FROM
89 EUR



LAB|401



RFID & NFC

Physical access, cards, magnetic stripe, cars



NFCKill RFID destruction device

The NFC Kill is the world's only RFID fuzzing tool. It is used to securely disable RFID badges, test RFID hardware, audit access control failure modes, and probe / exploit RFID attack surfaces during penetration testing. It is the only tool available to securely and permanently disable RFID cards in a manner compliant with the GDPR. Clients in high-security environments (Law Enforcement, Government, Corporate and Industrial) use NFC Kill as part of their Data Destruction Policy.

Specifications

High Frequency (13.56MHz)

Tags: All known tags (MIFARE Family, HID iCLASS, Calypso, Contactless Payment, etc.)

Hardware: Most reader and writer hardware, NFC-equipped phones, Contactless Payment Terminals, etc.

Effective Range: 0 - 6cm

Low Frequency (125 - 134KHz)

Tags: All known tags (HID, Indala, etc.)

Hardware: Most reader and writer hardware

Effective Range: 0 - 5cm

Ultra High Frequency (850 - 930 MHz)

Tags: Most known tags (EPC Classes 1 - 4, Security Tags, etc)

Hardware: Some reader and writer hardware

Effective Range: 0 - 3cm

Operating Modes: Single Pulse or Continuous (2 Hz / 0.5s)

Battery: Rechargeable Li-ion, 3.3V

Input Frequency: 3.3V

Output Voltage: ~1600V

FROM
265 EUR



LAB|401





SCM SCL3711

RFID miniature 13.56MHz reader/writer

SCL3711 has a small form factor to make it the optimal NFC reader and writer for mobile usage. Plug it into your laptop to instantly upgrade your machine with NFC capability. Compatible out of the box with raw mode libNFC and OS/X, Windows and Linux, this is a stable RFID reader / writer perfectly suited and tested with our badges. The SCL3711 is compact and portable, and is a vital part of any RFID / NFC testing toolkit. It is based on the PN532/3 For my experiments with NFC-type cards, I needed a fairly cheap reader which is quite full-featured and compatible with libnfc (a library of NFC functions). This allows for fairly good low-level access to NFC hardware. While cheap readers are available –e.g. the ACR122, some of these have problems with certain functionality. Under the hardware support, the SCL3711 from SCM Microsystems seemed quite good. Lacing the dongle on top of a bit of foil or large metal plate enhances the field, and fixes problems with libnfc thinking the card has been removed during writes.

Specifications

Operates in the following modes:

ISO/IEC 14443A/MIFARE® Reader/Writer

FeliCa Reader/Writer

ISO/IEC 14443B Reader/Writer

ISO/IEC 14443A/MIFARE Classic® 1K or MIFARE Classic® 4K emulation

FeliCa Card emulation

ISO/IEC 18092, ECMA 340 Peer-to-Peer

FROM
55 EUR



LAB|401



RFID & NFC

Physical access, cards, magnetic stripe, cars



HydraNFC

Sniffer / reader / writer/ emulator for HF

The HydraNFC is an incredibly powerful and flexible 13.56MHz NFC for sniffing / reading / writing / emulating platform for HF based tags. The Hydra NFC is less expensive, more powerful/extensible than Proxmark3 Hardware and does not require an FPGA, since all is done by the MCU Cortex M4F@168MHz with the help of HydraBus with an ultra-fast unique algorithm to sniff & decode in real-time PICC/PCD NFC cards. It also supports Wiegand protocol for sniffing BLE data transfer operations inside NFC reader's network.

Specifications

Supports NFC Standards NFCIP-1 (ISO/IEC 18092) and NFCIP-2 (ISO/IEC 21481)

Completely Integrated Protocol Handling for ISO15693, ISO18000-3, ISO14443A/B, and FeliCa

Integrated Encoders, Decoders, and Data Framing for NFC Initiator, Active and Passive Target Operation for All Three-Bit Rates (106 kbps, 212 kbps, 424 kbps) and Card Emulation

RF Field Detector With Programmable Wake-Up Levels for NFC Passive Transponder Emulation

Programmable System Clock Frequency Output (RF, RF/2, RF/4) from 13.56-MHz Crystal

Programmable Modulation Depth

Dual Receiver Architecture With RSSI for Elimination of "Read Holes" and Adjacent Reader System or Ambient In-Band Noise Detection

Programmable Output Power: +20 dBm (100 mW), +23 dBm (200 mW)

Support any protocols under 13.56 MHz with modulation depth OOK (100%) or ASK (from 7% to 30%)

Support low-level Direct Mode 0 (Raw RF Sub-Carrier Data Stream) or intermediate level (for special tags, not ISO compliant like MIFARE Classic® ...) Special Direct Mode for TX and Direct Mode 1 for RX using ISO encoders/decoders without protocol framing

Support of microSD (FAT16/FAT32) card up to 32GB to store the readings and scripts

Basic UID read for Vicinity/ISO15693

Basic UID read for ISO14443-A/MIFARE® card 4 or 7bytes UID

Read MIFARE Ultra light® tag content (full dump)

Tag Emulation UID ISO14443A & MIFARE Classic® 1K

Sniffer mode in an autonomous/stand-alone mode to store all readed UIDs.

Real-time ISO14443A sniffer mode

FROM
175 EUR



LAB|401



RFID & NFC

Physical access, cards, magnetic stripe, cars



ACR-122U 13.56MHz RFID/NFC reader/writer

The ACR122U NFC Reader is a PC-linked contactless smart card reader/writer developed based on 13.56 MHz (HF) Contactless (RFID) Technology. Compliant with the ISO/IEC18092 standard for Near Field Communication (NFC), it supports not only MIFARE® and ISO 14443 A and B cards, but also all four types of NFC tags. This is a very basic model for playing with RFID/NFC technologies for hackers, but it could be a good first step to enter this world. ACR122u uses NXP PN531/532/533 which works with libnfc (an opensource library for NFC/RFID devices that exploits a hidden mode of PN532 chipset). This hidden mode allows using a raw mode for writing, relay, cloning, cracking. It also permits writing un-writeable Block 0 (UID) using some special modified cards. It's a very good option for beginners. Libraries and tools available in: <http://nfc-tools.org>

Specifications

| | |
|-------------------------------------|---|
| Dimensions | 98.0 mm (L) x 65.0 mm (W) x 12.8 mm (H) |
| Weight | 70.0 g |
| Compliance / Certifications | ISO 18092, ISO 14443, PC/SC, CCID, EN60950/ISO 60950, CE, FCC, MIC, KC, VCCI, RoHS 2, USB Full Speed, Microsoft® WHQL |
| Interface | USB Full Speed 2.0 |
| Operating Distance | Up to 50 mm (depends on the tag type) |
| Supply Voltage | Regulated 5V DC |
| Supply Current | 200mA (operating); 50mA (standby); 100mA (normal) |
| Operating Temperature | 0-60 °C |
| Operating Frequency | 13.56 MHz |
| Smart Card Interface Support | ISO14443 Type A & B, MIFARE, FeliCa 4 types of NFC (ISO/IEC18092) tags |
| Operating System Support | Windows® Linux® Mac OS® Android™ 3.1 and above |

FROM
40 EUR

BEGINNER'S
CHOICE

amazon



RFID & NFC

Physical access, cards, magnetic stripe, cars



125KHz RFID Cloner 13.56MHz RFID/NFC reader/writer

This is a cheap classic device that can be used to clone RFID cards based on EM4100, HID and AWID type cards or tags. This is a standalone device that works without connecting it to a computer, so its usage is very easy. Just read the original tag UID and clone it later to a blank UID writeable Chinese tag of type T5577 or similar. There are still many applications all-over that use this kind of UID based authentication, like garages, locks, swimming pools, etc. So it's still a very useful device. And you have to remember that if you own a cheap NFC reader like the ACR-122 you are not able to read 125 KHz based RFID cards, so you'll need one of these devices.

Specifications

| | |
|--------------------------|--|
| Frequency: | 125KHz |
| Power Supply: | 2x AAA battery.it can be use 20,000 times.(Battery not included) |
| Reading Distance: | RFID Key tag/2.5cm; RFID Card/6cm |
| Dimensions: | Approx. 4.72*2.76*1.18in / 12*7*3cm |
| Extra: | Built-in individual LED lights and buzzer indicator. |
| Compatibility: | Compatible with T5577, CET5200, EM4305 and EN4305. |
| Cards included: | 5x Cards + 5 tags T5577 chip which compatible with EM4305 chip |

FROM
8 EUR

BEGINNER'S
CHOICE

AliExpress®



RFID & NFC

Physical access, cards, magnetic stripe, cars



RFID Field Detector

125KHz & 13.56MHz RFID/NFC detector

RFID Field Detector can be used to identify the presence of an RFID / NFC field. You can easily identify the frequency and unknown reader is operating at.

It supports:

- 13.56mhz high frequency or nfc reader
- 125khz low frequency reader

Specifications

Detects the presence of a #RFID field

Measure #reader duty cycle

Differentiate between 13.56MHz HF/NFC & 125kHz LF RFID #readers

Form factor that fits in your wallet!

FROM
10 EUR



RFID & NFC

Physical access, cards, magnetic stripe, cars



RFID pentesters pack

Multiple RFID/NFC cards & badges

For cloning and testing all the different RFID/NFC cards and badges, a NFC-hacker have to own a large kit of special blank writeable badges and cards. This kind of cards must have the UID writeable, and the vast majority of cards you will find in internet will not permit this.

The RFID Pentester Tag Pack is a curated collection of the must-have tags when working with RFID tools. They include multiple basic cards and some advanced cards as well. There are three different kits available for purchase.

Specifications

MIFARE Classic® Compatible 1K UID Changeable (coin format)

MIFARE Classic® Compatible 1K UID Changeable (fob format)

MIFARE Classic® Compatible 4K UID Changeable

MIFARE Ultralight® Compatible UID Changeable

NTAG® 213 Compatible UID Changeable

MIFARE Classic® Compatible 1K Direct Write UID

MIFARE Classic® Compatible 4K Direct Write UID

MIFARE Ultralight® Compatible EV1 Direct Write UID

MIFARE Classic® Compatible 4K 7-byte UID Changeable

MIFARE Classic® Compatible 1K UID One Time Changeable (fob format)

MIFARE Ultralight-C® Compatible UID Changeable

NTAG® 2xx / Ultralight Compatible Emulator

MIFARE DESFire® Compatible Emulator 4-byte UID

MIFARE DESFire® Compatible Emulator 7-byte UID

FROM
80 EUR



LAB|401



RFID & NFC

Physical access, cards, magnetic stripe, cars



Programmable SIM USIM Card 4G LTE WCDMA GSM Nano micro SIM Card

This is a kit containing 10 units of SIM USIM programmable blank cards for testing purposes. The cards come like the operator ones, that can be cut in different sizes:

- Standard SIM
- Micro SIM Card
- Nano SIM Card.

Specifications

Name: LTE Blank USIM Card

SIM Card Size: Standard SIM Card, ,Micro SIM Card Nano SIM Card

Compatible: 4G FDD LTE WCDMA GSM

Feature: Can be written ICCID, IMSI, KI, OPC and so on

Application: For Telecommunications Operator

Name: LTE Blank USIM Card


FROM
17 EUR

AliExpress



RFID & NFC

Physical access, cards, magnetic stripe, cars

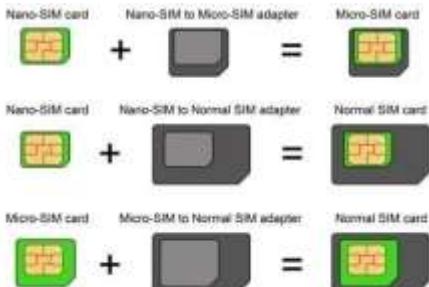

iSYFIX SIM Card Adapter kit All the necessary SIM converters in a kit

This set includes an adapter to use a nano SIM in a phone that requires a micro SIM, one to use a nano SIM in a phone designed for a mini SIM, and one to use a micro SIM in a phone designed for a mini SIM. It also includes a pinhole-ejection tool to release the SIM card tray in the newer smartphones. So no matter how old your GSM phone is, this set will adapt the newest generation of SIM card to the previous two generations' sizes, micro and mini.

Specifications

Convert your Nano Sim card to Micro Sim card.

Convert your Micro Sim card to normal size Sim card.

Convert your Nano Sim card to normal size Sim card.

Easily eject the sim card with the included steel sim eject pin.

Build with high quality materials with precision carved molds to fit perfect.


FROM
4 EUR

AliExpress



RFID & NFC

Physical access, cards, magnetic stripe, cars

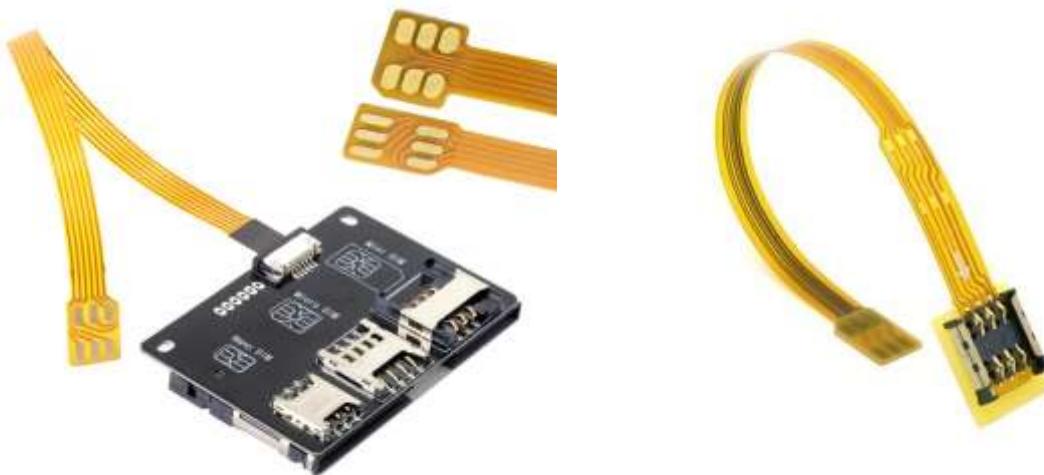

SIM card extender kits Multiple RFID/NFC cards & badges

Nano SIM Activation Tools Converter to Smartcard IC Card Extension for Micro & Nano SIM Card Adapter Kit. The kit included two set FPC cable. Only one SIM card can work at the same time. You can extend the Nano SIM card from inside to outside Nano SIM / Micro SIM / Standard SIM / Smart Card for the mobile & Tablet. This cannot be used for phones with hybrid SIM slots to use 2 SIM and microSD card together. I tried it but this is not designed to be used that way. It will be very useful for 3G/4G modems that are inside of a case and you need to have access to the SIM card when changing or upgrading it.

Specifications

Model 1: Nano SIM card from inside to outside Nano SIM / Micro SIM / Standard SIM / Smart Card
(The kit included two set FPC cable)

Model 2: Micro SIM to Standard SIM

Model 3: Micro SIM Card to Nano SIM


FROM
11 EUR

amazon



RFID & NFC

Physical access, cards, magnetic stripe, cars

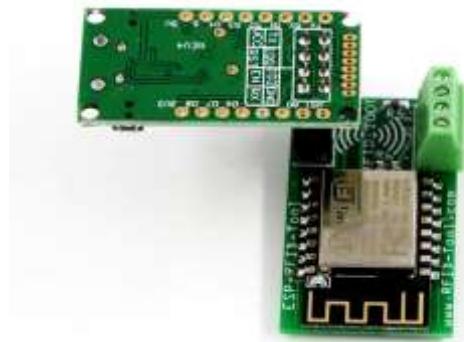

ESP RFID Tool Another Wiegand cable sniffer

A universal data logger that captures the raw binary data from a standard 5V Wiegand Interface. The device is capable of logging the credentials for access control systems or nearly any device that utilizes a Wiegand Interface such as RFID card readers, pin pads, magnetic stripe systems, and even some biometric readers. Wiegand Interfaces also do not have to be limited to just access control systems. The main target group for this device is 26-37bit HID cards. For known card types both the binary and hexadecimal data is displayed directly in the log file for easy badge identification and also in case a clone of a card may be needed. For unknown card types only the raw binary data is shown.

The hardware is based on an ESP12F WiFi chip with a full TCP/IP stack and Microcontroller Unit. The software is open source licensed under the MIT License and will be released the day the product is launched. The software will reside in this GitHub repo so it may be reviewed by the community. We will accept various pull requests from the community after being reviewed if it improves the value of the device for others. The software was written in the Arduino IDE so both hobbyist and professionals will have no issue modifying the code if they so choose. A Wiegand Interface operates using 3 wires, a ground, Data0, and Data1.

Demo video:

https://www.youtube.com/watch?v=0o8r_ufRrFo

Specifications

Wiegand cable protocol compatible

standard 5V Wiegand Interface

Data logger

voltages ranging from around 4.5V up to a maximum of 18V

FROM
17 EUR

AliExpress[®]





BLEKey

Bluetooth Low Energy Wiegand sniffer

BLEKey is a Bluetooth Low Energy (BLE) enabled tap for the Wiegand protocol, which is the most widespread protocol for proximity card reader systems but is outdated and should be replaced. BLEKey can be installed in a reader to passively sniff Wiegand data, and can emulate cards on that reader. By the details given by Mark Baseggio and Eric Evenchick, you should be able to install BLEkey in less than 2 minutes and BLEkey will have the capacity of storing 1500 RFID cards, this stored cards can after be downloaded to your mobile phone via Bluetooth. One interesting feature of BLEkey is the capability of disabling the card reader for 2 minutes after the crook has opened the door with the cloned card. All data can be offloaded to a phone with BLE support. Source and design files:

<https://github.com/linklayer/blekey>

Whitepaper from Blackhat USA 2015 talk:

<https://www.blackhat.com/docs/us-15/materials/us-15-Evenchick-Breaking-Access-Controls-With-BLEKey-wp.pdf>

Blackhat USA 2015 Talk:

<https://www.youtube.com/watch?v=seKas8KFcSI>

Specifications

Wiegand BLE protocol compatible

BLE sniffer

It can also be paired with a long range reader to create a card skimmer.

BLEKey requires a CR1632 battery (not included) to provide power.

FROM
35 EUR

HACKER
WAREHOUSE



RFID & NFC

Physical access, cards, magnetic stripe, cars



RFID blocking sleeves You need to protect your cards now

15-Pack Identity Theft Prevention RFID Blocking Sleeves by Boxiki Travel prevent thieves from stealing critical information electronically stored on your smart cards, including account numbers, PIN numbers, license numbers, expiration dates, card security codes (CSC), card verification values (CVV), names, addresses, dates of birth, and much more. Criminals use sophisticated electronic devices to scan your smart cards and passport and steal the information stored on them. They can do this from several feet away, without you ever knowing your private financial and identity information has been stolen.

That information is used within seconds to empty your bank accounts, run up massive charges, and open fraudulent accounts in your name. It can take weeks and months (if ever!) to recover from the financial damage of identity theft and online fraud... the only solution is not to be a victim!

Specifications

Advanced RFID blocking material

Secure from electromagnetic intrusion

Thin and lightweight, fit in travel wallets

Water- and tear-resistant

FROM
11 EUR

amazon



RFID & NFC

Physical access, cards, magnetic stripe, cars



RF blocking pouch Protect smartphones & keyless car keys

As you should know as hacker, in the actual times RF based systems suffer from a great variety of attacks that put in risk your assets. There are many ways to steal modern cars, like keyless attacks based on SDR devices, replay attacks, etc. This simple pouch blocks very well NFC / RFID based attacks and can protect your credit cards, car keys, and they promise that it will also block RF transmission for smartphones, since I really don't think that it could block the 100% of the RF signals. But it will block any kind of car key attacks for the new keyless car systems of very expensive cars.

Specifications

Color: Black,Brown,Pink.

Material: PVC Leather.

Item Weight: 30 g.

Open Size: 22cm*9.5cm

Closed Size: 14.5cm*9.5cm

It has two pockets, bag 1 for block signal, bag 2 for cash or other.

FROM
2.6 EUR

BEGINNER'S
CHOICE

AliExpress™



RFID & NFC

Physical access, cards, magnetic stripe, cars



MagSpoof Magnetic stripe emulator device

The Magspoof, originally created by Samy Kamkar is a wireless magnetic stripe emulator. This amazing little device can emulate all three tracks of a magnetic stripe card without actually being swiped. Rysc Corp revised the original design to include an integrated antenna, on/off switch and a convenient coin cell battery holder. The MagSpoof comes fully assembled, programmed and tested (batteries included). To work with the MagSpoof you will need the following:

AVR Programmer
MagStripe Reader (Recommended)

Specifications

| | |
|-----------------|----------------------|
| Dimensions: | 8.5 x 5.5 x 0.08 cm |
| PCB Thickness: | 0.8mm |
| Weight: | 10 g |
| In the Box: | MagSpoof and Battery |
| PCB Finish: | ENIG |
| RoHS Compliant: | Yes |
| Manufacturer: | Rysc Corp |
| Made in: | USA |
| License: | GPL |

FROM
60 EUR

 RyscCorp.





MagTek 21040145 SureSwipe 2x Head 3x Track Magnetic Stripe Reader

The MagTek 21040145 SureSwipe dual-head triple-track magnetic stripe card reader has a built-in USB cable to connect to the host system, and can be used to swipe and read the magnetic stripe on the back of a credit or debit card or another magnetic stripe card. Triple-track magnetic card readers can read and capture data from all three tracks typically present in a magnetic stripe to complete a transaction. Two magnetic heads allow a card to be read with one swipe, whichever way the magnetic stripe is facing. The bidirectional configuration of the reader enables cards to be swiped backward or forward at a speed of up to 60" per second. The built-in USB cable can be plugged into the USB 2.0 port of a computer or another host system to transmit card data and power the magnetic card reader. USB keyboard emulation enables the reader to transmit data to host systems and applications designed to receive keyboard input. An LED indicator turns red to alert the user of a decoding error.

Specifications

| | |
|-------------|--|
| Tracks: | Three-track magnetic card reader |
| Heads: | Two magnetic heads permit reading both sides |
| Direction: | cards can be swiped backward or forward |
| Speed: | Reader speed of up to 60" per second |
| Connection: | USB keyboard emulation (HID) |
| Weight: | 4.5 oz. |
| Size: | 1.23 x 1.28 x 3.94 x inches (H x W x D) |


FROM
50 EUR

amazon



HID & Keylog

Rubberducky, mouse injection, wireless keyboards

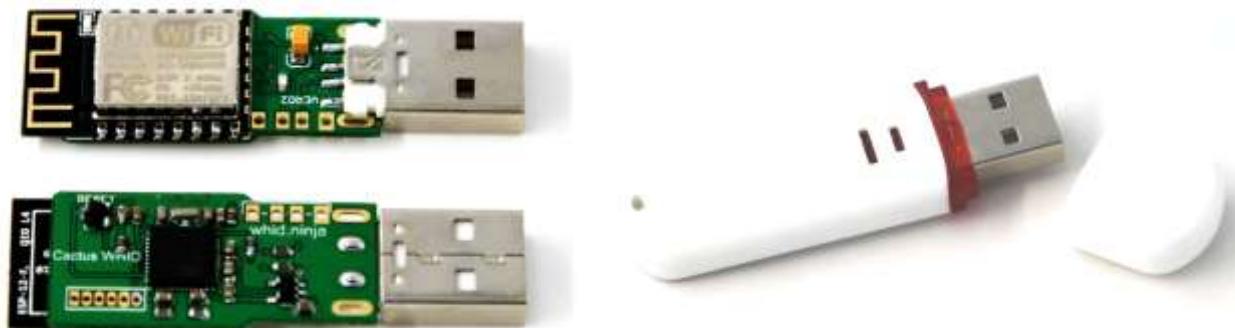

Cactus WHID injector USB rubberducky on steroids

WiFi HID Injector for Fun & Profit – An USB Rubberducky On Steroids. Customized HW based on Atmega 32u4 and ESP-12S. This device allows keystrokes to be sent via Wi-Fi to a target machine. The target recognises the Ducky as both a standard HID keyboard and a serial port, allows interactive commands and scripts to be executed on the target remotely.

Hardware Design Author: Luca Bongiorni .

<https://github.com/whid-injector/WHID>
https://m.youtube.com/channel/UCzh8wITSYbdZCs_Djym5UQ
<https://github.com/sensepost/USaBUsE>
https://github.com/spacehuhn/wifi_ducky
<https://github.com/basic4/WiDucky>
<https://blog.netapsys.fr/whid-ninja-the-wireless-rubber-ducky/>

Specifications

Atmega 32u4

Arduino friendly ESP 12 (ESP8266 Module)

WiFi (both AP and Client modes)

TCP/IP Stack

DNS Support

4MB Flash (3M SPIFFS), Flash speed 40 MHz

Pinout for weaponizing USB gadgets

SPI mode DIO (AVRISP mkII programmer mode)

UART speed 115.2K

HALL Sensor for easy unbrick

FROM
18 EUR


BEGINNER'S
CHOICE

AliExpress



HID & Keylog

Rubberducky, mouse injection, wireless keyboards

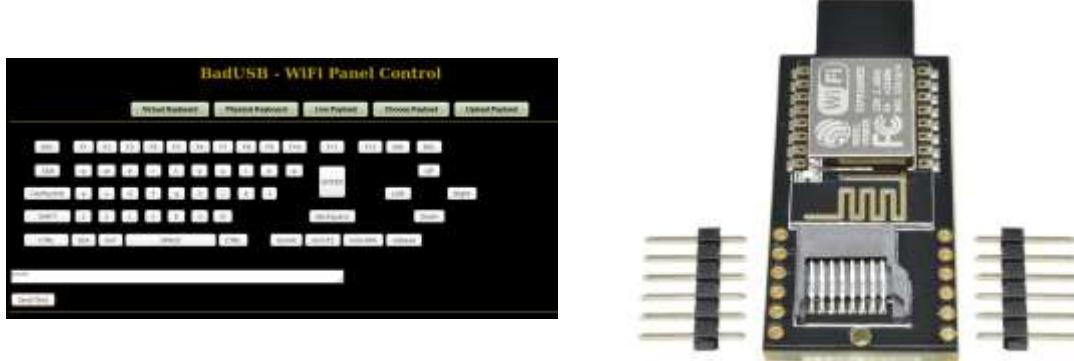

Badusb Wi-Fi microSD The most complete Rubberducky

This brand new USB rubberducky or badusb device offers many new possibilities, since it includes both interesting functionalities (microSD for payload storage and html pages and Wi-Fi interface for controlling it from the distance). It will create a Wi-Fi AP in which you connect with the smartphone or computer. Then you have to open your browser and enter the IP address <http://192.168.4.1> and you will control it

You can find the firmware and the instructions for flashing it in the following github:
https://github.com/joelsernamoreno/badusb_sd_wifi

There is more info on:

<https://github.com/puckk/CJMCU-3212>

Specifications

Microcontroller ATMEGA32u4

SOC ESP8266 (ESP-12E)

Storage: MicroSD card (FAT32 format)

Exposed GPIO ports for upgrading features

PCB based 2400 MHz antenna

Also known as CJMCU-3212 Virtual Keyboard Module

FROM
10 EUR

AliExpress



HID & Keylog

Rubberducky, mouse injection, wireless keyboards



Badusb microSD

Badusb with SD card for your payloads

This is one of the last developments related to rubberducky or badusb devices. This device is based on the ATMEGA32U4 microprocessor which is able to emulate many USB modes like HID, used for injecting key presses to the target system. The main processor is based on Arduino Leonardo R3 development board. The improvement is that a microSD card slot is included to allow storing many different payloads. The microSD card has to be FAT32 formatted in order to be recognized.

Specifications

High Performance, Low Power AVR® 8-Bit Microcontroller Advanced RISC Architecture

16/32KB of In-System Self-Programmable Flash

1.25/2.5KB Internal SRAM - 512Bytes/1KB Internal EEPROM

Programming of Flash, EEPROM, Fuses, and Lock Bits through the JTAG Interface USB 2.0 Full-speed/Low Speed

CPU Reset possible on USB Bus Reset detection

48MHz from PLL for Full-speed Bus Operation

USB Bus Connection/Disconnection on Microcontroller Request

Crystal-less operation for Low Speed mode Peripheral Features

On-chip PLL for USB and High Speed Timer: 32 up to 96MHz operation

One 8-bit Timer/Counter with Separate Prescaler and Compare Mode ATmega16U4/ATmega32U4 8-bit Microcontroller with 16/32K bytes of ISP Flash and USB Controller

One 10-bit High-Speed Timer/Counter with PLL (64MHz) and Compare Mode

Four PWM Channels with Programmable Resolution from 2 to 16 Bits

Six PWM Channels for High Speed Operation, with Programmable Resolution from 2 to 11 Bits

Output Compare Modulator - 12-channels, 10-bit ADC (features Differential Channels with Programmable Gain)

Programmable Serial USART with Hardware Flow Control

Master/Slave SPI Serial Interface

Operating Voltages 2.7 - 5.5V Operating temperature

FROM
4.5 EUR

BEGINNER'S
CHOICE

AliExpress



HID & Keylog

Rubberducky, mouse injection, wireless keyboards



USBNinja Wireless BadUSB / Rubberducky

The USBNinja is a highly covert USB exploit framework allowing for wireless remote triggering of custom payloads. While dormant, the USBNinja functions as a regular USB Cable: Data Transfer, Recharging, etc. However, when triggered (via smartphone or dedicated long-range antenna) - it executes its pre-programmed payload on the host device. Emulating keyboard and mouse actions, payloads are completely customisable, and can be highly targeted. Undetectable by firewalls, AV software or visual inspection, the USBNinja is an ideal tool for penetration testers, police and government.

Specifications

Cable Physical Characteristics

Length: 1 m , Colour: white

Connector options: Micro-USB, USB Type-C, Lightning

Voltage range: 4-25 V (supports fast charging)

Current consumption: 10 mA (typical)

Full-rate USB data transmission

Remote Control

High-powered Bluetooth wireless (customizable name and password)

Battery: 3.6 V, 40 mAh, rechargeable

Standby current: 80 µA, transmission current: 30 mA

Range (under ideal conditions with antenna):

30 m with 2 dBi, 3 cm antenna

50 m with 3 dBi, 11 cm antenna

100 m with 18 dBi directional panel antenna

Mobile App

Alternative to remote control for triggering payload

Open source and freely available

FROM
120 EUR



LAB|401



HID & Keylog

Rubberducky, mouse injection, wireless keyboards



Digispark Kickstarter mini Cheap and fully-working Rubberducky

This cheap USB dongle is based on the digispark Kickstarter project for an ATTINY085 USB development board. It works as the original rubberducky permitting to insert any HID payload that permits quickly hacking any OS (Windows, Linux and MacOS). There are many github accounts available with payload samples for Powershell, CMD and other OS exploits that permit to run and download many exploit codes from internet or directly from the devices internal memory.

Specifications

Support for the IDE > 1.0

Power from USB bus or external source 7-35V

On-board 500mA DC regulator

Built in USB and serial debugging

6 I/O pins (GPIO)

8k flash memory

I2C and SPI buses

PWM on 3 GPIO pins

ADC on 4 pins

Power LED and Test/Status LED on Pin 0


FROM
1.3 EUR

AliExpress



HID & Keylog

Rubberducky, mouse injection, wireless keyboards

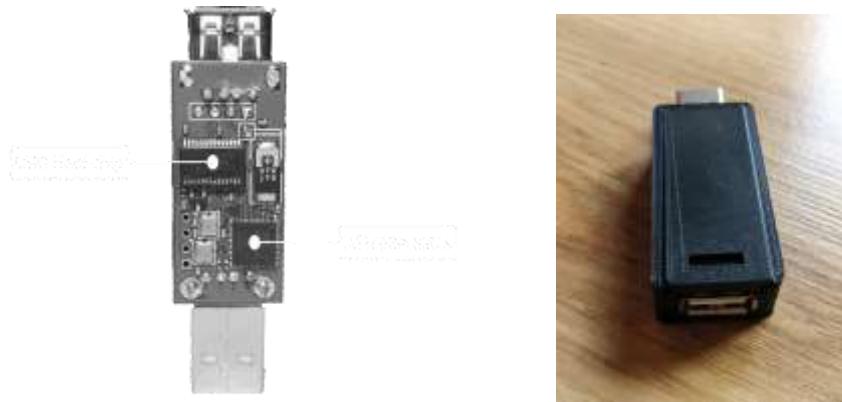

KeyvilBoard SMS

Smart Keylogger + badusb controlled by SMS

The software where the KEYVILBOARD runs on is entirely open-source and adjustable to your liking. This makes the KEYVILBOARD the most transparent, reliable and modular solution to this date, making this a must-have for Cyber Security professionals around the globe. The KEYVILBOARD SMS module is the hardware keylogger for long during operations, once set into place it will send all keystrokes using SMS via your mobile network provider of choice. This device can act as a keylogger, sending any pressed keys to the target via SMS messages using 2G networks where still available. It also works as a badusb HID injector accepting payloads via SMS. When combining both capabilities you get a smart keylogger able to identify passwords for sending them by request. To use or configure this device you need to install and program it via Arduino IDE and C++, since it's not very complicated to do it. It's not really a plug and play device but that's not a disadvantage because you can really customize it.

Yago Hansen has created a fork of the original firmware for this device with extra features:
<https://github.com/yadox666/KEYVILBOARD/tree/master/SMS%20version>

Specifications

Keylogger functionality with SMS

Badusb functionality accepting commands via SMS

Serial port exfiltration capabilities via SMS

SIM800L modem board

ATMEGA 32U4 SOC

USB host chip

Printed case included

FROM
105 EUR

KEYVILBOARD



HID & Keylog

Rubberducky, mouse injection, wireless keyboards



AirDrive Keylogger Max

One of the most advanced keyloggers

The AirDrive Keylogger Max is an ultra-small, incredibly powerful USB keylogger with wireless egress capabilities packed into a tiny footprint. Not only acting as a Wi-Fi access point, the AirDrive Keylogger Max also acts as a wireless bridge, allowing the device itself to stream captured data in real time, dispatch report emails and timestamp logs. It can be accessed and controlled via any Wi-Fi capable device such as a computer, laptop, tablet, or smartphone. Finally, when plugged into a computer, it functions as an 8GB USB thumb drive - totally masquerading its real use. Since it is maybe the most complete hardware keylogger you'll find in the market, it's fair to comment that it lacks of good build quality and service.

Specifications

8GB Internal Flash Memory

Wi-Fi Interface: WEP, WPA, WPA-2 security

Wi-Fi-Bridge allows for:

Real time captured data streaming

Automatic emailed log reports

Timestamping

Off-site remote-control

Encrypted internal memory

Masquerades as an 8GB flash drive

Works with 100% of USB Keyboards, Supports 40 international keyboard layouts

UTF-8/16 compatible logging

Device management via web-interface. No apps or software required

Management panel accessible from any computer, telephone, etc

Over-the-air data exfiltration

FROM
99 EUR



LAB|401





GL-Inet AR150 OpenWRT/LEDE router Pineapple

These small routers based in OpenWRT (now named as LEDE) operating system are the best option for those who need a very small platform with low power consumption that run Linux. The included hardware is based on Qualcomm SOC, which includes a Wi-Fi interface compatible with monitor mode, what allows scanning Wi-Fi APs and stations. The CPU doesn't offer an incredible performance, but it's enough for small projects as sensors, scanners, deauthers, MiTM, etc. Especially the AR150 model uses a very similar hardware to the Hak5 Pineapple Nano device but for a much reduced price. Therefore a hacker migrated the Pineapple firmware to this device:

<https://www.securityaddicted.com/2016/11/17/weaponizing-gl-inet-gl-ar150/>

<https://github.com/SecurityAddicted/pineapple-ar150>

Specifications

| | |
|--------------------------|---|
| CPU | Atheros QCA9331 SoC, 400MHz |
| Memory | DDRII 64MB |
| Storage | 16MB Flash |
| Interfaces | 1 WAN, 1 LAN, 1 USB2.0, 1 micro USB (power), 1 Reset button, UART |
| Frequency | 2.4 GHz @ 150Mbps |
| Max TX Power | 18 dBm |
| Protocol | 802.11 b/g/n |
| External Storage support | FAT32/EXFAT/EXT4/EXT3/EXT2/NTFS |
| Webcam support | MJPEG, YUV |
| DIY features | UART, 4xGPIO, 3.3V & 5V power port |
| External antenna support | Yes (GL-AR150-Ext) |
| PoE support | Yes (GL-AR150-Ext-2) |
| Power input | 5V/1A consumption: <1.5W |
| Dimension, Weight | 58*58*25mm, 39g |

FROM
27 EUR

BEGINNER'S
CHOICE

GL·iNet



Network

Routers, modems, VLAN, NAC



GL-Inet AR750S slate Gigabit Wireless Router

Slate brings all your workplaces under a digital roof with a secure VPN. Connecting your global offices with Slate so the staff from all locations can communicate with each other remotely and all data is shared securely. Slate is designed for frequent travellers; it is therefore both compact and lightweight. It can easily slip into a backpack or even your pocket and take it with you anywhere. It also comes with a USB port for connecting a 3G/4G USB modem. And of course OS is opensource LEDE/OpenWRT based.

Specifications

| | |
|---------------------------------|--|
| CPU | Qualcomm QCA9563 SoC, 775MHz CPU |
| Memory | DDRII 128MB |
| Storage | 16MB NOR Flash and 128MB NAND Flash |
| Interfaces | 3xWAN/LAN, 2 LAN, 1 USB2.0, 1 Reset button, UART |
| Frequency | 2.4 GHz & 5 GHz |
| Transmission rate | 150Mbps |
| Max TX Power | 20dBm (2.4GHz), 20dBm(5GHz) |
| Wi-Fi | 300Mbps(2.4G) + 433Mbps(5G) high speed Wi-Fi |
| External Storage support | FAT32/EXFAT/EXT4/EXT3/EXT2/NTFS |
| DIY features | UART, GPIO, 3.3V & 5V power port |
| Power input | 5V/2A |
| Power consumption | <6W |
| Dimension, Weight | 100mm X 68mm X 24mm, 86g |

FROM
70 EUR

GL·iNet





GL-Inet AR300M shadow OpenWRT/LEDE based advanced router

These small routers based in OpenWRT (now named as LEDE) operating system are the best option for those who need a very small platform with low power consumption that run Linux. The included hardware is based on Atheros Qualcom SOC, which includes a Wi-Fi interface compatible with monitor mode, what allows scanning Wi-Fi APs and stations. The CPU doesn't offer an incredible performance, but it's enough for small projects as sensors, scanners, deauthers, MiTM, etc.

Specifications

| | |
|--------------------------|---|
| CPU | Qualcomm Atheros QCA9531, 650MHz |
| Memory | DDRII 128 MB |
| Storage | 128MB Nand Flash + 16MB Nor dual flash |
| Interfaces | 1 WAN, 1 LAN 1 USB2.0, 1 micro USB (power), 1 Reset button, 1 switch |
| Frequency | 2.4GHz |
| Transmission rate | 300 Mbps |
| Max TX Power | 18dBm |
| Protocol | 802.11 b/g/n |
| External Storage support | FAT32/EXFAT/EXT4/EXT3/EXT2/NTFS |
| Webcam support | MJPEG, YUV |
| DIY features | UART, GPIO, PCIe interfaces |
| External antenna support | Yes |
| PoE support | Yes |
| Power input | 5V/1A consumption <1.5W |
| Dimension, Weight | 58*58*25mm, 39g |

FROM
27 EUR

GL·iNet



Network

Routers, modems, VLAN, NAC



GL-Inet USBi50 Minirouter OpenWRT/LEDE based router devices

These small USB stick sized router is based in OpenWRT (now named as LEDE) operating system. It is a good option for developing any application based on a very small platform with low power consumption running Linux. The included hardware is based on Qualcom SOC, which includes a Wi-Fi interface compatible with monitor mode, what allows scanning Wi-Fi APs and stations. The CPU doesn't offer an incredible performance, but it's enough for small projects as sensors, scanners, deauthers, MiTM, etc. If you need just to protect your laptop navigation by creating another layer between Internet and you, you can use this minirouters to connect by Tor or by VPN in a way that nobody can get up to your network traffic.

Specifications

| | |
|-------------------|---------------------------|
| CPU | QCA9331, 400MHz |
| Memory | 64MB |
| Storage | 16MB Flash |
| Frequency | 2.4GHz |
| Transmission rate | 150Mbps |
| Protocol | 802.11 b/g/n |
| Power input | 5V/1A |
| Power consumption | <1W |
| Buttons | Reset |
| Connection | USB to Ethernet interface |
| Dimension, Weight | 82*24*11mm, 10g |

FROM
27 EUR

GL·iNet





Gl-Inet Mifi OpenWRT/LEDE 4G router with battery

This small sized 4G LTE router offers a very good option for creating a hacking device that also needs to be connected to internet. The hardware is based on an Atheros SOC that includes a Wi-Fi interface that allows monitor mode for scanning and capturing raw Wi-Fi information. It also offers free GPIO, UART ports for connecting a GPS or any other device. The 4G connectivity option is based on an internal PCIe port that is populated with a Quectel EC25 4G WWAN card. All the firmware, SDK and code is open sourced and available through github. It also has an internal battery and charger, so it can be used in standalone mode. There is a slot for the SIM card and another for a microSD card, what allows to store captures, files, payloads, etc. There is also a free USB-A connector for attaching an extra Wi-Fi card or other peripheral devices.

Specifications

| | |
|--------------------------|---|
| CPU | Atheros AR9331, @400MHz |
| Memory/Storage | DDR 64MB/ FLASH 16MB |
| Interfaces | 1 WAN, 1LAN, 1 USB2.0, 1 micro USB (power), SIM card slot, MicroSD card slot, Antenna SMA mount holes |
| Frequency | 2.4GHz |
| Transmission rate | 150Mbps |
| Max TX Power | 18dBm |
| Protocol | 802.11 b/g/n |
| External Storage support | FAT32/EXFAT/EXT4/EXT3/EXT2/NTFS |
| Power input | 5V/2A |
| Power consumption | <3W |
| Dimension, Weight | 105*72*27mm, 170g |

FROM
109 EUR

GL·iNet



Network

Routers, modems, VLAN, NAC



Quectel EC25-EU 4G modem

4G/3G/GSM/GPRS + GPS/GNSS

Quectel EC25 Mini PCIe is a series of LTE category 4 module adopting standard PCI Express® MiniCard form factor (MiniPCIe). It is optimized specially for M2M and IoT applications, and delivers 150Mbps downlink and 50Mbps uplink data rates. EC25 Mini PCIe contains 5 variants: EC25-J Mini PCIe, EC25-E Mini PCIe, EC25-AU Mini PCIe, EC25-V Mini PCIe and EC25-A Mini PCIe. This makes it backward-compatible with existing EDGE and GSM/GPRS networks, ensuring that it can be connected even in remote areas devoid of 4G or 3G coverage. EC25 Mini PCIe supports Qualcomm® IZat™ location technology Gen8C Lite (GPS, GLONASS, BeiDou, Galileo and QZSS). The integrated GNSS greatly simplifies product design, and provides quicker, more accurate and more dependable positioning. A rich set of Internet protocols, industry-standard interfaces and abundant functionalities (USB drivers for Windows XP, Windows Vista, Windows 7, Windows 8/8.1, Windows 10, Linux, Android/eCall*) extend the applicability of the module to a wide range of M2M applications such as industrial router, industrial PDA, rugged tablet PC, video surveillance and digital signage.

Specifications

LTE category 4 module optimized for broadband IoT applications

Worldwide LTE, UMTS/HSPA+ and GSM/GPRS/EDGE coverage

Standard PCI Express® MiniCard form factor (Mini PCIe) ideal for manufacturers to easily integrate wireless connectivity into their devices

MIMO technology meets demands for data rate and link reliability in modem wireless communication systems

Multi-constellation GNSS receiver available for applications requiring fast and accurate fixes in any environment

FROM
45 EUR

AliExpress





USB to miniPCIe adapter Modem adapter with SIM socket

The New version 2.0-3 MINI PCI-E WWAN TO USB 4-Pin ADAPTER WITH SIM CARD SLOT Ideal for testing the WWAN cards. You don't need to break or open your laptop to test your WWAN modules. No risk! The adapter has integrated with a SIM card slot and 1 or 2 WWAN antenna It can work with most of WWAN modules. Very easy to use. Don't need extra drivers. Just make sure you have installed the drivers & software for your WWAN card. It works with desktop computer and laptop computer with WINDOWS OS (XP & VISTA). With SIM/UIM card slot at the switch interface, it enables you to use 3G module directly when SIM card installed. Stable performance, strong internet performance Built-in antenna switch port, can connect super external antenna Also used for 3G module flash, test, and unlock. Compatibility (3G network card: Huawei, ZTE, AIRCARD, OPTION, Samsung, HuaYu, Datang): (The following modules have been tested in advance. If you want to get it work with other WWAN modules, we cannot guarantee if it works)

Specifications

- PCIe to USB adapter
- SIM / UIM card slot present
- 1 / 2 WWAN antenna
- USB 2.0 Interface

FROM
14 EUR

amazon



Network

Routers, modems, VLAN, NAC



USB to miniPCIe adapter Another modem adapter with SIM socket

This adapter with case is deal for testing or reprogramming the firmware of the WWAN cards. You don't need to break or open your laptop to test your WWAN modules. No risk! The adapter has an integrated SIM card slot and 1 or 2 WWAN antenna. It can work with most of WWAN modules. Very easy to use. Don't need extra drivers. Just make sure you have installed the drivers & software for your WWAN card. It works with desktop computer and laptop computer with WINDOWS OS (XP & VISTA). With SIM/UIM card slot at the switch interface, it enables you to use 3G module directly when SIM card installed. Stable performance, strong internet performance Built-in antenna switch port, can connect super external antenna Also used for 3G module flash, test, and unlock. Compatibility (3G network card: Huawei, ZTE, AIRCARD, OPTION, Samsung, HuaYu, Datang): (The following modules have been tested in advance. If you want to get it work with other WWAN modules, we cannot guarantee if it works). It doesn't support PCI-E bus type minicard such as Wifi module, only supports USB bus interface of Mini-Cards such as 2G GSM, GPRS, 3G, CDMA, WLAN, WWLAN, HSPA MODEM, GPS, 4G WiMAX, LTE, and Mini-Card to desktop PC

Specifications

PCIe to USB adapter

SIM / UIM card slot present with support for SIM 6pin/8pin card connector

1 / 2 WWAN antenna

USB 2.0 Interface

FROM
11 EUR

AliExpress



Network

Routers, modems, VLAN, NAC



Waveshare 4G modem + GPS 4G/3G/2G/GSM/GPRS + GPS/GNSS

In many of your outdoor/indoor projects you'll need to have any kind of IoT Internet communication system. Actually LTE (4G) is the most extended system to access Internet wirelessly. There are many operators available through the world and the data connection prices are not very expensive. Also the broadband LTE data bandwidth is more than acceptable, offering high speed and wide coverage communications all over the world. This modem can be easily integrated in your Raspberry pi projects as an extra, connecting it with the Raspberry board by using the 40 pin available connector. It includes a SIM socket for the operator card and many possible configurations for connecting it to other boards. You can also use it as a normal 4G external modem thanks to the USB connector. The easiest software for using it in Linux is *wvdial*.

Specifications

Raspberry Pi connectivity, compatible with Raspberry Pi Zero/Zero W/Zero WH/2B/3B/3B+

Supports dial-up, telephone call, SMS, MMS, mail, TCP, UDP, DTMF, HTTP, FTP, etc.

Supports GPS, BeiDou, Glonass, LBS base station positioning

On-board USB interface, to test AT Commands, get GPS positioning data, and so on

On-board CP2102 USB to UART converter, for serial debugging

Breakout UART control pins, to connect with host boards like Arduino/STM32

SIM card slot, supports 1.8V/3V SIM card

TF card slot for storing data like files, messages, etc.

On-board audio jack and audio decoder for making telephone call

2x LED indicators, easy to monitor the working status

On-board voltage translator, operating voltage can be configured to 3.3V or 5V via jumper

Baudrate: 300bps @ 4Mbps (default: 115200bps) Autobauding baudrate: 9600bps - 115200bps

Control via AT commands (3GPP TS 27.007, 27.005, and V.25TER command set)

Supports SIM application toolkit: SAT Class 3, GSM 11.14 Release 99, USAT

Comes with development resources and manual (examples for Raspberry Pi/Arduino/STM32)


FROM
60 EUR

AliExpress®



Network

Routers, modems, VLAN, NAC



LTE PCB Antenna 4G/3G/2G/GSM/GPRS + GPS/GNSS

When designing your own hacking devices and integrating mobile network based technologies you will need to find an antenna that meets your needs. This small PCB antenna incorporates an UFL connector that is very usual in embedded devices. PCB antennas are an adequate solution for projects in which there isn't place enough for using external omnidirectional antennas. This antenna will work in all the necessary bands for including 4G / 3G/ 2G/ GSM/ GPRS + GPS/GNSS applications that need to be connected to the same RF circuit.

Specifications

LTE band: 28/38*2

Frequency: 703~803/2520~2620(MHz)

Antenna size: 75 x 21 (mm)

PCB: 0.6 mm

Low Bands

(5, 8, 12, 13, 18, 19, 20, 28)

TX frequencies: 699 to 915 MHz

RX frequencies: 729 to 960 MHz

Mid Bands

(1, 2, 3, 4)

TX frequencies: 1710 to 1980MHz

RX frequencies: 1805 to 2170 MHz

RF Cable Assemblies: SMA(F) JK-IPEX MHF U.FL 1.13 100MM

Weight: 40g

FROM
12 EUR

 **seeed**
The IoT Hardware Enabler





Bus pirate v.3.6

Last and most powerful NF device

Every prototype starts with a Bus Pirate. One open source development tool. So many features. Only \$30 bucks. Bus Pirate v3 is a universal bus interface that talks to electronics from a PC serial terminal. Get to know a chip without writing code. Eliminates a ton of early prototyping effort with new or unknown chips. A laser cut acrylic case for Bus Pirate v3.6 is also available. This board provides 1-Wire, I2C, SPI, JTAG, asynchronous serial (UART), MIDI, PC keyboard, HD44780 LCDs, and generic 2- and 3-wire libraries for custom protocols. Don't forget to buy the cable kit from the same store.

http://dangerousprototypes.com/docs/Features_overview

Specifications

- 0-5.5volt tolerant pins
- 0-6volt measurement probe
- 1Hz-40MHz frequency measurement
- 1kHz - 4MHz pulse-width modulator, frequency generator
- On-board multi-voltage pull-up resistors
- On-board 3.3volt and 5volt power supplies with software reset
- Macros for common operations
- Bus traffic sniffers (SPI, I2C)
- A bootloader for easy firmware updates
- Transparent USB-> serial mode
- 10Hz-1MHz low-speed logic analyser
- Servo driver
- Can program many AVR microcontrollers
 - Supported by AVRdude
 - Can emulate the AVR STK500 v2 with alternate ST500 Clone firmware
- Programs FPGAs and CPLDs with alternate XSVF firmware
- Scriptable from Perl, Python, etc.


FROM
30 EUR

DANGEROUS PROTOTYPES
OPEN SOURCE HARDWARE PROJECTS
 **seeed**
The IoT Hardware Enabler



BUS

HW hacking, JTAG, cars, motorbikes

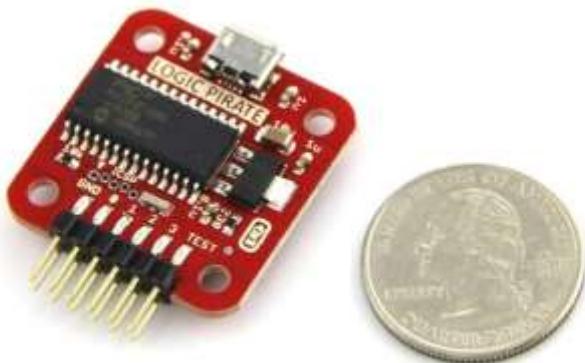

Logic pirate Logic analyser for complicated signals

The Logic Pirate is an inexpensive, yet capable open source logic analyzer. It can sample 8 channels at 20 million samples per second, and may be overclocked for even faster acquisitions. It's designed to support the open source SUMP logic analyzer protocol with software available for most operating systems.

http://dangerousprototypes.com/docs/Logic_Pirate

Specifications

8 channels

256,000 Samples recording size

20 MHz sampling speed, can potentially be overclocked to 60 MHz

No compromise on sample size when combining different speeds or number of channels

Simple configurable edge detection triggers on all inputs (simple OR trigger)

Configurable ratio of samples from before and after the trigger (rolling sample buffer)

5 V tolerant inputs (LOW-level voltage < 0.8 V, HIGH-level voltage > 2.0 V)

About 500 kB/s transfer speed to the PC (256 kSamples take about 0.5 seconds)

Data capturing can be stopped from the host software anytime

Cross platform host software for Windows, OS X, and Linux

DIY-friendly 0603 parts and SOIC packages used on a 2-layer board

On board 3.3 V regulator can supply up to 400 mA to an external circuit

Tiny 3cm x 3cm PCB

Firmware updates via built-in USB bootloader

Probe cables and acrylic case available from Seeed Studio

Open source PCB (EAGLE) and firmware files

OLS Analysis software included

OLS Analyzers for a large number of protocols: 1-Wire, I2C, JTAG, SPI, UART, etc.

FROM
30 EUR

DANGEROUS PROTOTYPES
OPEN SOURCE HARDWARE PROJECTS
 **seeed** STUDIO
The IoT Hardware Enabler





GreatFET One

Another Great Scott Gadgets toy

GreatFET One from Great Scott Gadgets is a hardware hacker's best friend. At the center is a powerful NXP LPC4330 (Cortex M4 @ 204MHz) with two USB ports, one host and one peripheral, so it can act as a 'man in the middle' for USB interfacing. With an extensible, open source design, two USB ports, and 100 expansion pins, GreatFET One is your essential gadget for hacking, making, and reverse engineering. By adding expansion boards called neighbours, you can turn GreatFET One into a USB peripheral that does almost anything. Whether you need an interface to an external chip, a logic analyzer, a debugger, or just a whole lot of pins to bit-bang, the versatile GreatFET One is the tool for you. Hi-Speed USB and a Python API allow GreatFET One to become your custom USB interface to the physical world.

- Programmable digital I/O
- Serial protocols including SPI, I2C, UART, and JTAG
- Analog I/O (ADC/DAC)
- Logic analysis, data acquisition and debugging
- Versatile USB functions including FaceDancer
- High-throughput hardware-assisted streaming serial engine

Specifications

LPC4330 microcontroller + 2 MB flash memory

Hi-Speed USB port for connection to a host computer

Expansion interface of 80 pins with a bonus row of 20 male pins

4 indicator LED, 2 buttons, primarily for development (DFU and RESET, just like HackRF One)

Full Speed USB port (USB1) for connection to a target (for Facedancer)

Power switching for use of USB1 as either host or device

Real Time Clock with crystal

3.3 V regulator that can supply some power to neighbors

Unpopulated Cortex Debug Header (J5) for JTAG or SWD

FROM
80 EUR



BUS

HW hacking, JTAG, cars, motorbikes



USB logic analyzer For debugging embedded hardware

The product is good and working well. It works perfectly with Saleae Logic 2.0 software (available for quite all the OS platforms) what is really the main pro of this product. This product is very useful for anyone using micro-controller development. It also supports decoding of various protocols. The software permits recording analog and digital signals into your computer, analyse the logic of the protocols, measure the signals, create triggers and decode the known protocols (UART, SPI, I2C, 1WIRE, JTAG, SWD, Modbus, CAN...).

Once you have decoded your data with a protocol analyzer, you can search through all these decoded results by just typing what you are looking for – the software will jump right to the spot where it happened.

Specifications

8 input channels

Logical light indication: a small light indicate CHO electrical level

Input feature: 5PF, 100K Ohm

USB power supply

Sampling rates: 24MHz, 16MHz, 12MHz, 8MHz, 4MHz, 2MHz, 1MHz, 500KHz, 250KHz, 200KHz, 100KHz, 50KHz, 25KHz

Data upload real time, the max of depth of collection is 10T, far from practical need

Support WIN7(32&64), 2K, XP, LINUX


Compatible with Saleae Logic 2.0 software

FROM
5 EUR

BEGINNER'S
CHOICE

AliExpress



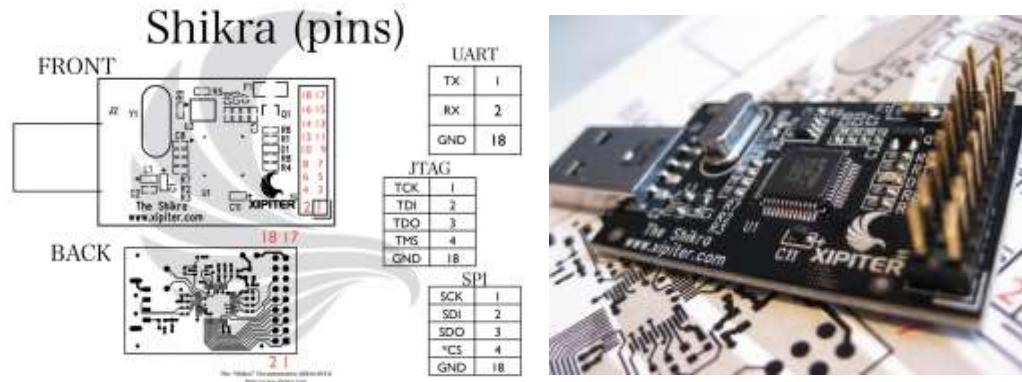

The Shikra

Bus pirate JTAG big brother

The Bus Pirate, as well as the Shikra, are devices that enable a user to interact with different types of protocols. Protocols such as JTAG, SPI, I2C, UART and GPIO via a USB interface. Once you've identified all your pin-outs, protocols, data rates, and device addresses, it's usually best to move on to more robust single-purpose tools. FTDI's FT232H is a more powerful chip compared to the older brother to FT232R USB to UART adapter. The "-H" model of chips are widely used in JTAG adapters but also support several different serial protocols, plus the ability to bit-bang custom ones. The Shikra is Xipiter's nice, dead-simple FT232H device that allows you to use all these different modes. Bus Pirate, since it is well supported by OpenOCD - it's incredibly slow, and required frequent reconnecting for hardware reset. The Shikra was equally as easy to get wired up for JTAG and use with OpenOCD.

<https://www.xipiter.com/musings/category/iot>

Specifications

[JTAG](#)

[SPI](#)

[I2C](#)

[UART](#)

[GPIO](#)

FROM
45 EUR

DANGEROUS PROTOTYPES
OPEN SOURCE HARDWARE PROJECTS

seeed
The IoT Hardware Enabler



BUS

HW hacking, JTAG, cars, motorbikes



Xpliot Nano Another hardware hacking multi-tool

Xpliot-NANO is a compact hacker friendly multi-purpose, multi-protocol hardware tool mainly used to debug and program microcontrollers/processors and flash chips. Xpliot-NANO can be configured to support hardware protocols including, UART, I2C, SPI, ARM SWD and JTAG. Even though it runs on 3.3V, all I/O pins are 5V tolerant.

<https://exploit.io/products/exploit-nano>

Specifications

USB 2.0 High Speed interface

Memory - onboard 2 kb EEPROM

Supports USB-TTL mode (virtual com interface)

Supports read, write and erasing flash chips (BIOS, firmware..)

Supports read, write and erasing I2C and SPI EEPROMs

Standard JTAG debug interface as well as ARM SWD debug interface

GDB Debugging support

Can be used with any openOCD supported processors/controllers

Supported by OpenOCD on-chip debugger (open source)

Supported by Exploit - Internet of Things Exploitation framework (open source)

Power - Host computer power-up the board, no external power supply required

Compact size 60mm x 20mm

FROM
40 EUR

EXPLIOT
www.exploit.io





DIVA IoT board

Damn Insecure and Vulnerable Application

DIVA [Damn Insecure and Vulnerable Application] board is a connected IoT device and a vulnerable target board designed to teach the basics of IoT security. DIVA integrates an ARM cortex M4 microcontroller and a 802.15.4 radio on the board. It comes with many more on-board peripherals including, SPI and I2C EEPROMS, IR receiver, temperature sensor, RGB LED, input switches etc. The board provides a standard JTAG debug interface as well as a SWD port that can be used to debug programs from the host PC. The inbuilt USB port can be used for accessing the serial console and for firmware upgrades in DFU mode. Some challenges are preloaded in the firmware. New firmware with updated challenges will be available at:

<https://exploit.io/collections/boards/products/diva-iot-board>

Specifications

USB 2.0 virtual com interface

USB Device Firmware Upgrade (DFU) support

Memory - onboard 256 kb I2C EEPROM and 256 kb SPI EEPROM

Standard JTAG debug interface as well as ARM SWD interface

GDB Debugging support

Can be used with any openocd supported debugger/programmer

UART debugging port

Exposed I2C and SPI lines for easier access

Built-in 802.15.4 radio

Supports IR reception (from standard remote controls)

Power - Host computer power-up the board, no external power supply required

Stand alone mode with external power supply (6v to 12v)


RGB status led, on-board LED array and a power LED

Compact size 84mm x 70mm

FROM
200 EUR

EXPLIOT
www.exploit.io



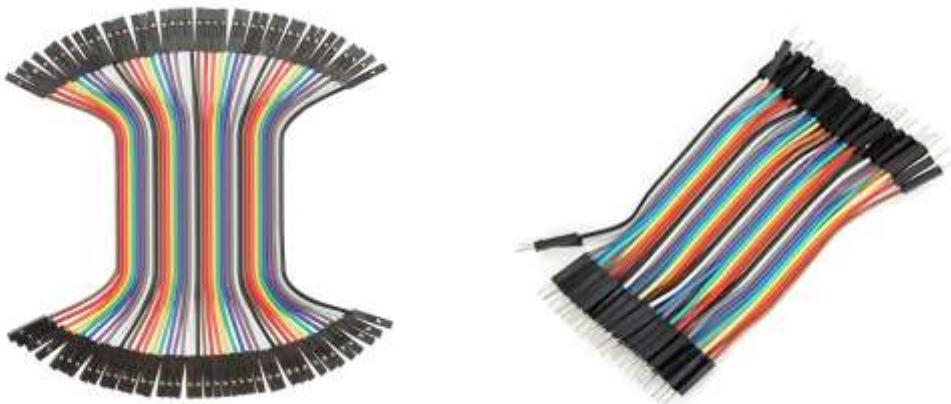

Jumper cables DuPont line jumpers for electronics

It's always nice to have extra jumper wires on hand for your projects. The wires in this peel-apart set come in 10 colours and feature crimp terminals that fit side-by-side for use with standard 1.0 inch headers. Use them individually, or peel off a group to serve as a custom-width cable for a sensor or accessory. These jumper wire ribbons are available in 100 mm or 200 mm lengths, and with Male – Male or Male - Female terminals.

This is the perfect companion for your electronic projects like hardware hacking, device connecting, etc.

Specifications

Available in 100 mm or 200 mm length

Quantity: 40 wires

Female-female

Gauge: 28 AWG, stranded

Female-male also available

Male-male also available

FROM
1 EUR

BEGINNER'S
CHOICE

amazon





Probe Clip-hooks

Really useful clips with hooks

Test Hooks Clips for Logic Analysers. Perfect to use in testing IC or repair cell phone and other mini electronic products. Lightest weight and highest performance, free your hands for repairing or testing. Powerful spring pulling the min hooks to grasp tiny components firmly.

Specifications

Available in 100 mm or 200 mm length

Quantity: 40 wires

The rear cap can be removed easily for the cable threaded through and soldered

Gauge: 28 AWG, stranded

Female-male also available

Male-male also available

FROM
1 EUR

AliExpress®





SOIC 8-Pin IC test clip. High quality test clip for your chips

This is an IC Test Clip for 8-pin small outline integrated circuits (SOIC). This test clip assures a secure connection to all chip leads on an 8-pin SMD SOIC and provides hands-free testing. The way the clip is designed, the compression from the large spring is applied to the body of the IC, not the pins, via the plastic legs at the end of the clip. The pins receive much smaller forces from the springy contacts at the end of the clip. The plastic legs at the end also go around the curve at the edge of the IC body, keeping the clip firmly in place.

On this test clip you will find two sets of gold plated contacts, upper contacts to attach wiring and lower contacts for an 8-pin IC. Simply place your choice of IC in the lower contacts and attach female terminated jumper wires to the 0.1" spaced upper contacts and you are ready to start testing! The only thing I would change about this clip would be to add a pin 1 indicator so that once you have your wires connected to the headers it's clear which way it should be clipped onto the IC, but a black Sharpie took care of that easily enough. It's ideal for both bench work and limited production runs. Tested for ATtiny85.

Specifications

Fits surface mounted SOIC and SOJ chips with gull wing or "J" leads and body width from .150" to .350" wide.

Gold plated lower contacts assure reliable, noise free connections.

Molded barriers between each contact allow connections to be made on live boards without accidental shorting to adjacent chip leads.

FROM
17 EUR

sparkfun
ELECTRONICS





SOP8 clip + EEPROM programmer Clip and programmer for many BIOSes

This is a CH341A 24 25 Series EEPROM Flash BIOS and a SOP8 Test Clip For EEPROM 93CXX / 25CXX / 24CXX in-circuit programming + 2 size adapters. You need to know before buying it that some boards can clip chip directly, but some other boards cannot operate like this, because the chip will be affected by the peripheral circuit around. You need to get informed before clipping it. When finding the programmer with protected function, the clamp cannot be read out under normal voltage. At this time, a 3.3v voltage should be added. The method is as follows: the clamp clamps the chip, and the clamp corresponding to the 8th pin of the chip adds a 3.3v voltage. Generally, the power supply of 3.3v has two wires, so it is ok for VCC to connect the clamp and the other wire to be directly grounded.

Conversion block can use some chips is 1.8v such as huabang w25q64, wang hong mx25u1635, mx25u6435 and so on in 3.3v programmer for conversion burn. These chips are typically used on the motherboards of apple computers.

There is a lot of information in Internet about this programmer and how to use it:

<https://www.bios-mods.com/forum/Thread-GUIDE-Flash-BIOS-with-CH341A-programmer>

Specifications

Available in 100 mm or 200 mm length

Quantity: 40 wires

Female-female

Gauge: 28 AWG, stranded

Female-male also available

Male-male also available


FROM
4 EUR

AliExpress



BUS

HW hacking, JTAG, cars, motorbikes

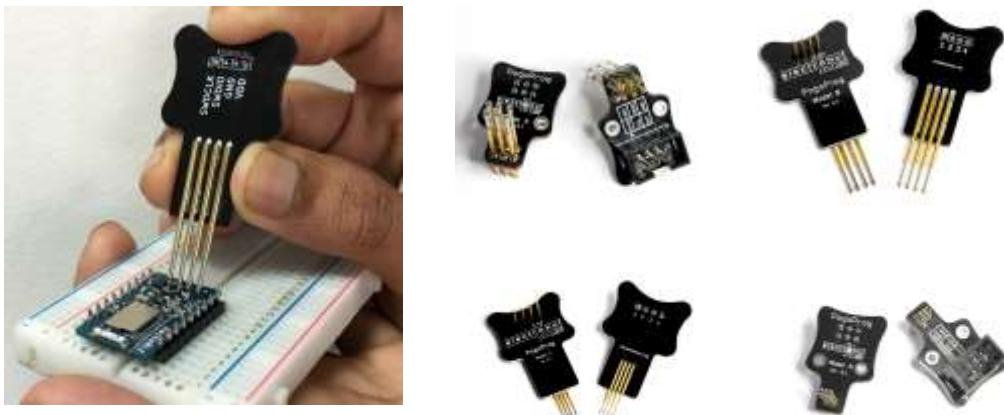

PogoProg 4 different Pogo Pin Programmers

We design a lot of custom hardware and it's a common practice to add a programming header to a PCB. We've been making do with make-shift programmers for a while now. We finally decided that it would be a good idea to make a well-designed product that would be helpful to the maker community at large. We've taken care to design PogoPin with ergonomics and aesthetics in mind. Pogo pins are expensive and inconvenient to source in small quantities, so we believe that providing a pre-soldered inexpensive programmer could be beneficial. PogoProg is a range of spring-loaded programming adapters from Electronut Labs. These are designed with aesthetics and ergonomics in mind, and can be in a variety of production and prototyping situations. Pogo pins are expensive and inconvenient to source in small quantities, so we believe that providing a pre-soldered inexpensive programmer could be beneficial.

More info:

<https://docs.electronut.in/PogoProg/>

Specifications

PogoProg Model A 2x3 (6-pins) 2.54 mm pitch header - perfect for AVR and similar microcontrollers

PogoProg Model B 1x4 (4-pins) 2.54mm header that uses the SWDIO, SWCLK, VDD and GND pins.
(Of course you can use this programmer for any 4 signal lines, as long as the pitch is compatible.)

PogoProg Model C 1x4 (4-pins) 1.27mm Pitch for SWD programmers. You can also use it for 4 signal lines if the pitch is compatible.

PogoProg Model D 2x3 (6-pins) 1.27mm pitch. You can program any board with 2x3 programming headers if the pitch is compatible.

FROM
7 EUR





USB to TTL/UART

Must-have tool for any hardware hacker

An USB to UART or TTL adapter is a “must-have” for all your projects. You will use it hundreds of times for connecting external UART type peripherals, like GPS modules, magnetometers, etc. as well as for connecting to console in multiple board based computers, like Raspberry Pi, Arduino, etc. There are many different models available in the market from prices from 5 bucks up to dozens, but quite all of them work very well. Some of them are based on the CP2102/CP2104 chipset and other on the FTDI FT232RL. Some of them include, as this model, DC power supply for 5V and for 3.3V powering external devices, such as GPS modules. This is one of the most compatible ones but as they are very cheap it's a good option to buy some of them.

Specifications

USB 2.0 to TTL UART 6PIN CP2102 Module Serial Converter

USB specification 2.0 compatible with full speed 12Mbps

Standard USB type A male and TTL 5pin connector

5pins for 3.3V, TXD, RXD, GND & 5V

Baud rates: 300 bps to 1.5 Mbps

Byte receive buffer; 640 byte transmit buffer

Hardware or X-On/X-Off handshaking supported

Event character support Line break transmission

USB suspend states supported via SUSPEND pins

Temperature Range: -40°C to +85°C.

Supports Windows 98SE, 2000, XP, Vista, Window7, Mac OS 9, Mac OS X, Linux > 2.40

FROM
10 EUR

BEGINNER'S
CHOICE

AliExpress
amazon





STM32 programmer/debugger

Programming/debugging for STM32 micros

ST-LINK/V1 and ST-LINK/V2 embed a unique interface (ST debug) with the USB. When powered up, the boards are in firmware-upgrade mode (also called DFU for "Device Firmware Upgrade"), allowing firmware to be updated through the USB. Dedicated commands switch the ST-LINK from the firmware-upgrade to the STM8 or STM32 debug mode (depending on firmware capability). There is no similar command to switch back to the firmware-upgrade mode (a power cycle is required). The STLINK-V3SET is composed of a main module and a complementary adapter board. The SWIM and JTAG/SWD interfaces are used to communicate with any STM8 or STM32 microcontroller located on an application board. The modular architecture of STLINK-V3SET enables to extend its main features through additional modules such as the adapter board.


Specifications

- 5 V power supplied by a USB connector (USB 2.0 full-speed-compatible interface)
- 1.65 V to 5.5 V application voltage supported on SWIM interface
- SWIM low-speed and high-speed modes supported
- SWIM cable for connection to the application via a pin header or a 2.54 mm connector
- 1.65 V to 3.6 V application voltage supported on the JTAG/SWD interface and 5V tolerant inputs
- JTAG cable for connection to a standard JTAG 20-pin pitch 2.54 mm connector
- JTAG supported
- SWD and serial wire viewer (SWV) communication supported
- Direct firmware update feature supported (DFU)
- Status LED which blinks during communication with the PC

FROM
12 EUR

AliExpress
amazon





AVR programmer/debugger

Programmer/debugger for ATmega micros

This new version uses an SMD 5x2 header. This is a simple to use USB AVR programmer. It is low cost, easy to use, works great with AVRDUDE and **Magspoof**, and is tested extensively on a Windows desktop. Based on Dick Steefland's USBtiny and Limor Fried's USBtinyISP. It works well with Windows, Linux and Mac boxes. For out-of-the-box compatibility with other operating systems and machines, checkout the AVR ISP2 USB programmer from Digikey. This programmer works really well for ATmega168 and ATmega328 and should work with all the AVR micros supported by AVRDUDE. This board is buffered and power protected so that you can do some really evil things to the programmer without killing it. It is fast! Comparable speed to the AVR ISP2 USB programmer from Digikey. One of the greatest features of this board is the ability to power the target (up to 500mA) from the programmer. To use this programmer, attach to a Windows machine and install the drivers listed below. Open a command prompt. Assuming WinAVR (and therefore AVRDUDE) have been installed, type:

```
avrdude -c usbtiny -B 1 -patmega328 -U flash:w:main.hex
```

Be sure to include the "-B 1" flag as this will significantly increase the programming speed! You may need to change -p flag to your appropriate microcontroller.

Specifications

Standard AVR ISP programmer

ATtiny2313 with USBtiny firmware preloaded

Buffered output

PTC fuse protected power

Programmer can power target (up to 500mA)

Programming cable included (10-pin and 6-pin targets supported), USB cable not included

Supports ATmega168/328 and some others not based on i2c like AD9833 and MPU9255

Windows, MacOS and Linux support

FROM
15 EUR

sparkfun
ELECTRONICS



BUS

HW hacking, JTAG, cars, motorbikes



RS-422/RS-485 Shield The industrial connection entry point

The RS485 is in use in many applications like industrial and home automation (for example MODBUS), lighting control (DMX), video surveillance (for example Pelco-D). Some RS485 shields are already available for the Raspberry Pi on the market, but these extensions are not suitable for professional use, because they come without a galvanic isolation between the RS485 bus and the Raspberry Pi. Without such isolation a damaging of the Raspberry Pi or malfunction of the device is possible, because of the large distances of a RS485 bus. Furthermore a full-duplex mode (RS422) is also not integrated.

If you like to know more about RS485 visit this website:

http://www.radio-electronics.com/info/telecommunications_networks/rs485/rs-485-tutorial-basics.php

Specifications

Galvanic isolation between PI and interface

RS422 (full duplex) support

RS485 (half duplex) support

Indicator LEDs for RX and TX activity

Switchable pull-up, pull-down and terminal resistor

Different modes for send/receive switching (Auto, GPIO18, always transmitter, always receiver)


Auto switching via monoflop

All options adjustable via DIP switches

FROM
32 EUR

 zihatec



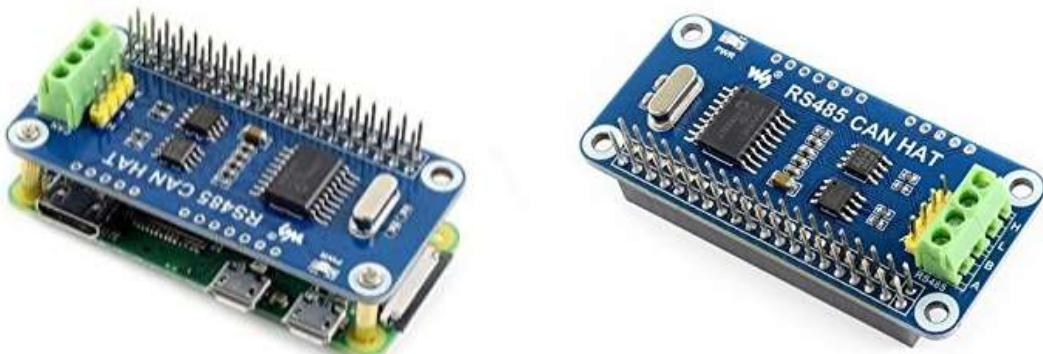

Waveshare RS485 Can Hat CAN bus for Raspberry Pi model Zero W

The RS485 is in use in many applications like industrial and home automation (for example MODBUS), lighting control (DMX), video surveillance (for example Pelco-D). Some RS485 shields are already available for the Raspberry Pi on the market, but these extensions are not suitable for professional use, because they come without a galvanic isolation between the RS485 bus and the Raspberry Pi. The RS485 CAN HAT enables your Pi to communicate with other devices stably in long-distance via RS485/CAN functions.

If you like to know more about RS485 visit this website:

http://www.radio-electronics.com/info/telecommunications_networks/rs485/rs-485-tutorial-basics.php

Specifications

Operating voltage: 3.3V

Onboard CAN controller MCP2515 via SPI interface, with transceiver SN65HVD230

RS485 function, controlled via UART, half-duplex communication, with transceiver SP3485

Dimension: 65mm x 30mm

Mounting hole size: 3.0mm

Compatible with Raspberry Pi Zero/Zero W/Zero WH/2B/3B/3B+
Reserved control pins, allows to work with other control boards

FROM
18 EUR

amazon



BUS

HW hacking, JTAG, cars, motorbikes



CANtact 1.0

Single-channel CAN bus to USB

CANtact is an open source Controller Area Network (CAN) to USB interface for your computer. The CANtact device is a single channel USB CAN interface. It can be used to connect to CAN bus systems, including cars, heavy duty vehicles, and industrial automation systems. CANtact works on Linux, OS X, and Windows. CANtact is supported by SocketCAN, CantaApp, and pyvitt. The CANtact hardware and firmware are open source, and are available on Github. The CANtact hardware is designed KiCad, which is a free and open source hardware design tool.

With a CANtact and an OBD-II to DE9 cable, it is very easy to get onto the OBD-II CAN bus of any CAN enabled vehicle. Connect to any CAN enabled car using a standard OBD-II cable. A truly open source hardware project. All design files are available under a permissive license. Works on Mac, Linux, and Windows. Easily scriptable using an open-source Python library, designed for hackers.

Specifications

CANtact is based around the ST STM32F042C6 microcontroller

A Microchip MCP2561 CAN transceiver provides an interface to a standard high speed CAN bus.

CANtact acts as a virtual serial port, and uses the LAWICEL protocol to send and receive frames.

CANtact can operate at speeds much higher than 115200 bps

The DE9 connector of the CANtact allows for two pin mappings for different use cases:

Pins 7 (CAN high), 2 (CAN low), and 3 (ground) for standard CAN connections

Pins 3 (CAN high), 5 (CAN low), and 1 (ground) for use with an OBD-II to DB9 cable.


Compatible with the Sparkfun OBD-II to serial cable

The final jumper is for CAN termination. Place the jumper besides the "CTE" marking to place 120 ohms across CAN high and CAN low. This is commonly used in development, when you are only interfacing with a single CAN device.

FROM
60 EUR

CANtact
The Open Source Car Tool
linklayer



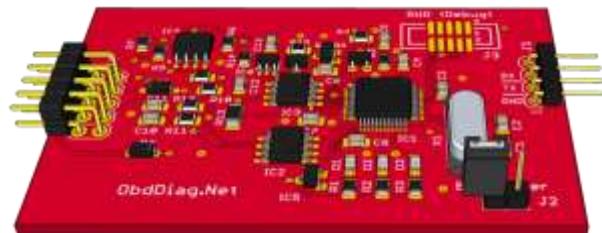

OBD-DIAG Open-source ELM327 OBD adapter

The AllPro adapter is a small device that plugs into your automobile's On-Board Diagnostic (OBD) port, which grants access to the car's computerized self-diagnostic system. All cars manufactured in 1996 and later have an OBD-II port, which is usually located under the dashboard on the driver's side. The adapter allows you to interface with your car's OBD-II bus. It provides you a serial interface using the ELM327 command set and supports all OBD-II standards. The adapter kit schematic is shown here. It is built around NXP LPC1517 Cortex-M3 microprocessor with 64 Kb program memory, but can accommodate another chip from same family like LPC1549 with 256 Kb if required. The NXP chips have a ROM-based bootloader that supports loading a binary image into its flash memory using USART or CAN. All the software is written in C++ for NXP LPCXpresso IDE which is essentially using GNU toolchain for ARM Cortex-M processors. However, it can be compiled with other pre-built GNU toolchain, like GCC ARM Embedded or even with Keil uVision IDE.

Specifications

NXP LPC1517JDB48 ARM Cortex M3 72Mhz processor

64kB Flash, 12kB RAM

Using NXP sophisticated State Configurable Timers to do the precise signal handling for J1850 PWM and VPW protocols

CAN FIFO buffers for handling some not-strict ISO-compliant ECUs

Bootloader for initial firmware programming

Low power consumption

SAE J1850 PWM

SAE J1850 VPW

ISO 9141-2

ISO 14230-4

ISO 15765-4 CAN

SAE J1939

SAE J1850 PWM

SAE J1850 VPW

FROM
20 EUR

ObdDiag.Net





Machina M2

Hacking cars like a PRO

M2 by Macchina is an open and versatile automotive interface that can take your car to the next level. Use it to customize your ride or as a development platform for your next product. M2 works with almost any vehicle and features an SAM3X ARM Cortex-M3 processor at its core (the same processor as the Arduino Due). An XBee form factor socket allows for many wireless capabilities (BLE, WIFI, GSM, 3G, LTE, GPS). Some of the first adopters of M2 were Security Researchers, and it remains a great platform for their work. M2 can also be used to make your car safer by tracking its location and other telematic data. Telematics isn't just for safety; race teams, parents and fleets are all looking for more insight into their cars.

You can read more about M2 general features on:

<https://www.macchina.cc/m2-introduction>

Specifications

32kb EEPROM + MicroSD card socket

2 CANBUS channels, 2 LIN/K-Line channels, Single-wire CAN interface

Arduino 84MHz

32-bit Atmel SAM3X8E ARM Cortex M3 processor

DIGI XBee form factor expansion port

Expandable through optional breadboard

6 general purpose driver circuits

Up to 1 amp of current at 12 volts


2x User programmable buttons, 2 hard buttons, 1x RGB LED, 5x colour LED

56.4mm x 40.6mm x 15.7mm

FROM
97 EUR

macchina



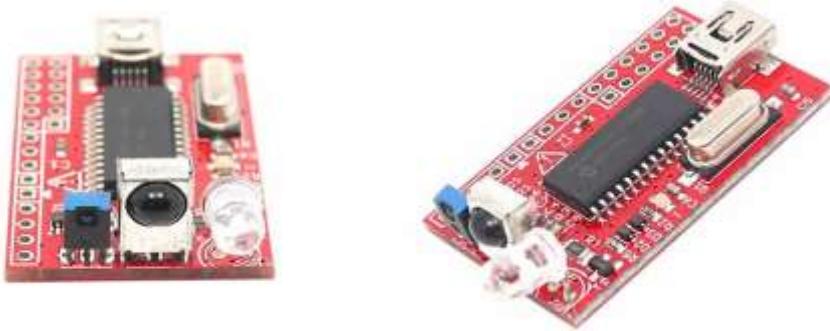

USB Infrared Toy v2

Infrared connections still exist

Assembled USB infrared remote control receiver / transmitter v.2 designed by DangerousPrototypes.com. Use a remote control with your computer, view infrared signals on a logic analyser, capture and replay remote control buttons, and play TV POWER codes. Still today there are many devices that can be controlled by IR signals. If you plan to develop your own control utilities, this is the device you need.

Specifications

NEW: 100mA constant current IR transmitter with improved range

NEW: Infrared frequency measurement

NEW: Pin breakout area

Infrared remote control decoder (RC5)

Infrared signal logic analyzer

Capture and replay infrared signals

USB connection, USB bootloader for easy updates

Supported in WinLIRC

Open source (CC-BY-SA)

FROM
20 EUR

DANGEROUSprototypes
OPEN SOURCE HARDWARE PROJECTS

seeed
The IoT Hardware Enabler



Accessories

Storage, powerbanks, batteries, chargers, GPS



NVIDIA GeForce GTX 1080 Ti High performance GPU processing card

There was a time, in which graphics cards were only for gamers. But someone later discovered that GPU were incredibly better for cracking passwords than CPU. From that point every hacker needs to have access to a computer with a good graphics card for cracking many types of key hashes. The best software tool for doing that is *hashcat*, but it's not easy to install and configure it. When achieved, the results are awesome.

WPA2 hashcat benchmarking

| GPU | WPA2 hash rate |
|----------------------------------|----------------|
| RTX 2080 Ti | 758700 hash/s |
| Nvidia RTX 2080 Founders Edition | 571400 hash/s |
| Nvidia GTX 1080Ti | 576000 hash/s |
| Radeon VII 16GB | 534000 hash/s |
| Nvidia GTX 1080 | 396800 hash/s |
| GeForce GTX 1070 | 285000 hash/s |

Specifications

Boost Base Core Clock: 1683 MHz / 1569 MHz(OC Mode),1657 MHz / 1544 MHz(Gaming Mode) ,1582 MHz / 1480 MHz(Silent Mode)

Graphics card Dimensions: Card: 269 x 111x 35 mm / 1363 g, Cooler: 151 x 120 x 52 mm, Tube: 330 x 10.6 mm

Memory Bus: 352-bit

Graphics Card Memory Size: 11GB

Memory Clock: 11124 MHz (OC Mode),11016 MHZ (Gaming Mode),11016 MHz (Silent Mode)

Output: DisplayPort x 3 (Version 1.4),HDMI (Version 2.0),DL-DVI-D

Power Consumption Connector: 8-pin x 1, 6-pin x 1

CUDA Cores: 3584

Interface: PCI Express x16 3.0

Memory Type: GDDR5x

Power Connector: 250W

Recommended PSU: 600W

FROM
750 EUR

amazon



Accessories

Storage, powerbanks, batteries, chargers, GPS



Beitian BN-180 GPS GPS module with UART bus

Having a UART GPS is very useful for some hacking projects. Always signing the network captures with the actual real geolocation is a good idea. It also works for Wi-Fi, Bluetooth, Lora wardriving projects. There are some different models available from Beitian. BN280 and BN-880 both have a compass (magnetometer) built in. These are pretty bulky for a mini quad. There are smaller GPS modules, such as the BN180 and 220. These don't have Compass in them however. The BN-180 doesn't have flash memory for saving configuration while the BN-220 does. Ask if the connection cable is included in your order, you'll need it. You can use it on a Raspberry Pi and many other boards with UART interface, or by using UART to USB adapter.

Specifications

| | |
|-----------------------|--|
| Dimensions / Weight : | 18mm*18mm*6mm / 4.9g |
| Receiving Format : | GPS, GLONASS, Galileo, BeiDou, QZSS and SBAS |
| Frequency : | GPS L1,GLONASS L1,BiDou B1,SBAS L1, Galileo E1 |
| Channels : | 72 Searching Channel |
| Tracking : | -167dBm |
| Position Horizontal : | 2.0 m CEP 2D RMS SBAS Enable (Typical Open Sky) |
| Velocity : | 0.1m/sec 95% (SA off) |
| Timing : | 1us synchronized to GPS time |
| Cold Start : | 26s , Warm start : 25s, Hot start : 1s |
| Support Rate : | 4800bps to 921600bps,Default 9600bps |
| Data Level : | TTL or RS-232,Default TTL level |
| Data Protocol : | NMEA-0183 or UBX, Default NMEA-0183 |
| Single GNSS : | 1Hz-18Hz |
| Concurrent GNSS : | 1Hz-10Hz,Default 1Hz |
| VCC : | DC Voltage 3.0V-5.5V,Typical: 5.0V |
| Current : | Capture 50mA/5.0V |
| TX LED: | Blue. The data output, TX LED flashing |
| PPS LED: | red.PPS LED not bright when GPS not fixed, flashing when fixed |
| Wiring: | GND,TX output, RX input, VCC(3.0v-5.5v) |


FROM
20 EUR

AliExpress
amazon



Accessories

Storage, powerbanks, batteries, chargers, GPS

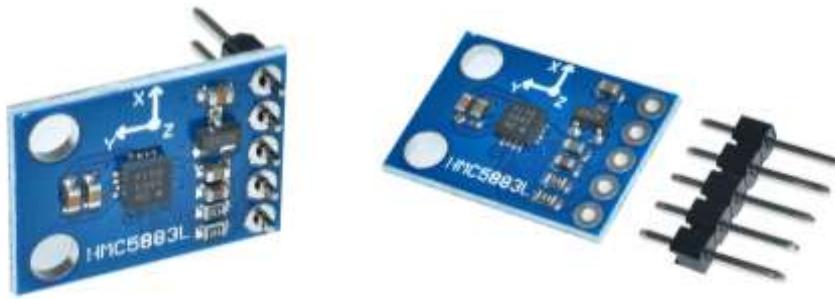

Magnetometer Sensor Module 3-Axis compass magnetometer

This module offers a triple Axis Compass Magnetometer Sensor for your electronic applications. It can be connected to any board offering I2C interface. It is used for measuring the direction and magnitude of the Earth's magnetic field. It is used for low cost compassing and magnetometry. It measures the Earth's magnetic field value along the X, Y and Z axes from milli-gauss to 8 gauss. It can be used to find the direction of heading of the device or antenna. There are many possible applications for such a device, like antenna direction finder, parabolic antenna tuning, GPS navigation, ship navigation, etc.

More info:

<https://www.electronicwings.com/raspberry-pi/triple-axis-magnetometer-hmc5883l-interfacing-with-raspberry-pi>

Specifications

Item name:: HMC5883L module (three-axis magnetic field module)

Model: GY-273

Chipset : HMC5883L

BUS : Communication: I2C communication protocol

Measuring range: $\pm 1.3\text{-}8$ gauss

Power supply: 3-5V

Size: 1.8 x 1.3 cm

Weight : 17 g

FROM
1.3 EUR

AliExpress



Accessories

Storage, powerbanks, batteries, chargers, GPS



Powerbank for Raspberry Pi DC power + 5 port USB hub

The working PMU (Power Manage Unit) can work for charging mode or step-up mode at the same time. If the USB-A interface without any external load (like Pi), with 5V input voltage of microUSB, then the PMU enter charging mode. The PMU will integrate a current-limiting resistor with the external voltage, 5V voltage for Lithium battery, around 4.6V-4.7V voltage for USB-A interface. The PMU would enter step-up mode without external 5V voltage. Under this circumstance, turn on the switch, USB-A interface can output maximum 5V voltage, two USB-A interface can maximum output 1.8A current. The PMU itself has current-limiting protection. It will be short circuit when over 1.9A current. You can charge the battery even if the switch is turn off. Attach it to the Raspberry pi using the included board separators.

Specifications

Battery capacity: 3800mAH

Maximum output current: 1.8A

Output voltage: 5.1V ± 0.1V

Double USB output

Standard charging current / voltage: 1.0A/5.0V

It can last about 9 hours if only pi 3.

Branded as MakerHawk


FROM
29 EUR

amazon



Accessories

Storage, powerbanks, batteries, chargers, GPS

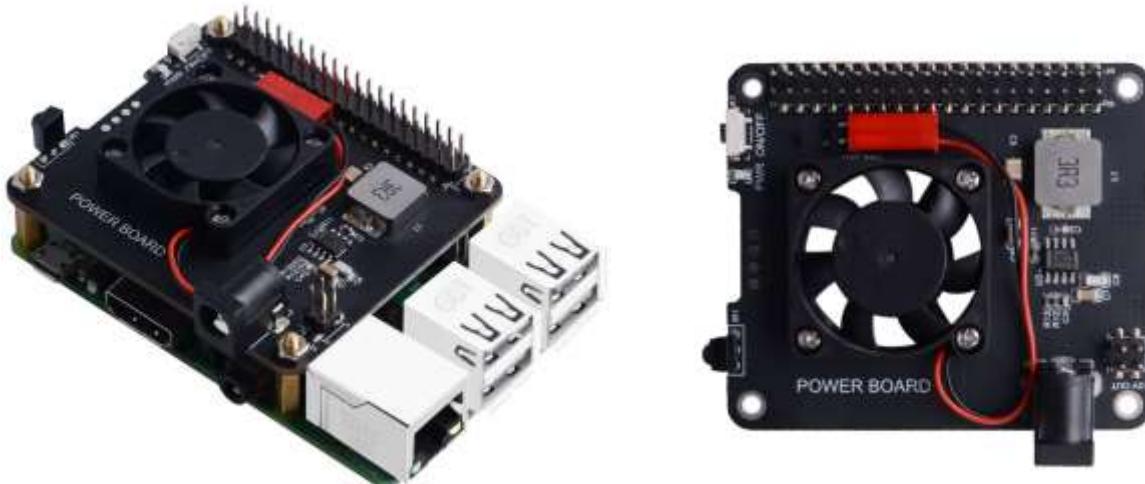

DockerPi PowerBoard Power control board for Raspi

DockerPi PowerBoard is used to power the Raspberry Pi (or similar SBC) with a typical power of up to 20W (5V/4A) and can run up to 25W (5V/5A) with good heat dissipation. DockerPi PowerBoard also provides power to other DockerPi modules to protect the security of the power supply. It also provides a safe shutdown function, supports IR remote control switch, button control switch (Requires Driver, One-Step Automated Install). DockerPi PowerBoard has fan cooling, and we recommend that you install the DockerPi PowerBoard on the bottom of the other DockerPi. DockerPi PowerBoard recommends 12V 2A or above power input and 12V power from 4-pin headers to other DockerPi (for other modules that require 12V power).

Specifications

SMPS

12V Input

Typical output:20W(5V/4A)

Absolute output:25W(5V/5A)

3CM Quiet Fan

Remote Control Safe Power(Require Driver)

Button Control Safe Power(Require Driver)

Recommended to be stacked at the bottom

Can Stack with other Stack board

FROM
19 EUR

 **seeed**
The IoT Hardware Enabler



Accessories

Storage, powerbanks, batteries, chargers, GPS



Quimat 3.5 LCD touch screen Small sized LCD touchscreen for Raspi

This is the Quimat QC35C LCD Display Kit with 40PIN Raspberry Pi styled GPIO extension connector. It is fully compatible with Raspbian Linux distribution and Kali Linux 2019.1 ARM versions. To configure it in Raspbian, use the “raspi-config” tool and select Waveshare 3.5A model. In Kali Linux, you can also use the forked tool called “kalipi-tft-config” with the same LCD screen type. You can also configure root auto-login or onscreen keyboard, since it's a touch screen. It's ideal for having feedback in your outdoor projects.

For configuring it:

https://www.youtube.com/watch?v=kBtnQdD_ssM

There is also a screen touch menu project available from:

<https://whitedome.com.au/re4son/kali-pi/>

Specifications

Touch Screen LCD Display kit designed for using the GPIO pins of raspberry pi

Directly plug and play while the main board is running

Can connect other 40 pin GPIO components at the same time

Supports multiple systems: includes Raspberry Pi 3 2 Model B B+ A A+, Raspbian, Kali, Ubuntu, Retropie, PiPlayer, windows10, Orange PI, Nanop Pi M1, and Banana PI M2

Input native resolution 480*320

Touch pen included

FROM
35 EUR

BEGINNER'S
CHOICE

amazon



Accessories

Storage, powerbanks, batteries, chargers, GPS

IPS screen, wide viewing angle, excellent display effect
Small size, high resolution, high definition display



Waveshare 1.3" IPS LCD display 240x240 SPI Display for Raspberry Pi Zero

This is an IPS LCD display HAT for Raspberry Pi, 1.3inch diagonal, 240x240 pixels, with embedded controller, communicating via SPI interface. Trying to add a control interface for your Pi? This compact display would be the ideal choice. Standard Raspberry Pi connectivity, compatible with Raspberry Pi Zero/Zero W/Zero WH/2B/3B/3B+. IPS screen, wide viewing angle, better display. High definition in small size. 1x joystick, 3x pushbuttons, handy and useful.

Comes with development resources and manual (examples for Raspberry Pi/Arduino/STM32).

Specifications

Driver: ST7789

Interface: SPI

Display color: RGB, 65K color

Resolution: 240x240

Backlight: LED

Operating voltage: 3.3V

FROM
17 EUR

amazon



Accessories

Storage, powerbanks, batteries, chargers, GPS



RasPI Thermal Printer Hat 7x105px thermal printer UART/USB

The thermal printer module is available in Arduino shield format (R2Z5000) and in Raspberry hat format (R2Z5001). Both variants have UART interface connected to his specific pinout pins. USB can be optionally connected with a Micro USB cable. The shield has an independent power connector that powers both printer and Arduino/Raspberry board. Please note that Arduino/Raspberry power source is insufficient and shall not be used with the printer connected. This is a thermal printer hat for Raspberry Pi The printer shall be powered directly through his power connector within a minimum voltage of 12V/1A and a maximum of 18V. The integrated regulator will forward a proper stabilised 5V to the Arduino/Raspberry main board that does not need to be powered separately. Do NOT use Raspberry's micro-USB power connector because current and voltage are totally insufficient for both devices.

Specifications

- Onboard power supply with 12-18V input voltage at 1A (will power both Raspberry and Printer hat)
- Serial communication over USB (standard COM port, no driver needed, will work on any OS) and UART interface (TTL 5V)
- PTY-like control protocol
- Paper jam status control
- Paper feed button
- Status leds
- 7 dots hot printing head
- 105 dots per line
- Text mode printing with 7x5 dots characters
- Graphical printing with 105x7 dots contiguous areas
- Paper width of 37 mm

FROM
40 EUR

 **seeed**
The IoT Hardware Enabler



Accessories

Storage, powerbanks, batteries, chargers, GPS



Kuman Camera for RasPi 5MP 1080p HD Video Webcam Night Vision

For many Raspberry Pi based projects you will need a good quality camera for using it as a spy camera, face recognition, security camera, etc. This camera is an upgraded release of the classic PiCamera also available in other stores. This camera offers high resolution image 5 Megapixel with a good F-factor aperture (F2.9) and medium angle width. NOTE: IR board turns on automatically in default factory setting, and LED light will keep on in this mode. In order to extend the life of LED lights, please adjust the centre of resistance with a small screwdriver according to your needs, then IR light will turn on & off automatically based on the value you set. If you want LED always keep on, we also sell heat sink for your special needs. Attention: This is upgraded one!!

Specifications

| | |
|-----------------------------------|--|
| Lens: | 1/4 5M |
| CCD sensor: | 5 megapixel OV5647 sensor |
| Aperture (F): | 2.9 |
| Focal Length: | 3.29MM |
| Diagonal: | 72.4 degree |
| Sensor best resolution: | 1080p (2592×1944 pixels) |
| Image capture resolutions: | 2592 x 1944 pixel static images; Capture video at 1080p @ 30 fps, 720p @ 60 fps and 640x480p 60/90 |
| Dimensions: | 25mm x 24mm x 6mm |
| Flash / lights: | 2 3W high-power 850 infrared LED and/or fill flash |
| Supported Raspi releases: | Raspberry Pi model B/B+ A+ RPi 3 2 1 |

FROM
22 EUR

amazon



Accessories

Storage, powerbanks, batteries, chargers, GPS



Extreme Cooling Fan Heatsink Power control board for Raspi

510 Version Extreme Cooling Fan Kit For Raspberry Pi 3B+ is a brand new Cooling system for your Raspberry Pi 3B+. It fits for all of your case so that you do not need to buy another case for your raspberry pi. The fan is 3510 version and more powerful but still quite when it is running. The Raspberry Pi 3B+ does not really need an active cooling system, because it's a fanless board, but in some situations (like overclocking or outdoor usage) it will prevent overheating. Two aluminium blocks will touch the MCU tightly and good for the heat spreading. It also includes a copper heatsink and cooling pads for cooling the downside of the board. The temperature fell by 15-20 degrees in load.

Specifications

- 1x 3510 Version Extreme Cooling Fan
- 1x Copper Heatsink
- 2x Thermal Tapes

FROM
8 EUR

AliExpress[®]



Accessories

Storage, powerbanks, batteries, chargers, GPS



HDMI to VGA converter Works with Raspberry Pi + surprise

This HDMI to VGA converter is one of the most known models in the market. It works perfectly for connecting Raspberry Pi to old styled VGA monitors, providing resolutions up to Full HD. There are models that incorporate an extra Audio port for getting the sound out of the HDMI output, using a mini-jack 3.5 stereo adapter. This cheap model was very known some years ago because it permitted to be used for a very different application. More info:

<https://hackaday.com/2018/04/23/spoofing-cell-networks-with-a-usb-to-vga-adapter/>
<https://github.com/steve-m/fi2k-examples>

Specifications

| | |
|-------------------------------|--|
| Input: | HDMI Male |
| Output: | VGA Female |
| Audio Support: | No |
| Installation: | Plug and Play |
| Supported Resolutions: | 1080p/1080i (1920x1080), 1600x1200, 1280x1024, 720p/720i (1280x720), 800x600, 576p/576i (768x576), 480p/480i (640x480) |

FROM
8 EUR

amazon



Accessories

Storage, powerbanks, batteries, chargers, GPS



Plugable USB to Ethernet Linux compatible LAN adapter

Plug into any USB 2.0 laptop or desktop currently limited to 10/100 Ethernet, and benefit from faster transfers on your Gigabit Ethernet Network. USB 2.0 supports theoretical speeds up to 480Mbs. In practice, most machines will see up to a doubling of network speed by moving from 100Mbs Fast Ethernet to 1000Mbs Gigabit Ethernet via USB. Also works on 10/100 Ethernet networks at their native speeds. You can also use it in many Android based smartphones. This model using ASIX AX88178 chipset is very compatible with Linux and Android boxes.

Specifications

USB 2.0 male A to RJ45 female adapter supporting 10/100/1000 Ethernet at USB 2.0 speeds (480Mbs)

ASIX AX88178 Controller and Realtek RTL8211CL PHY - Jumbo packets up to 9KB

Compatible with Windows, Mac, Chromebook, Linux/Unix

USB-A male connector

FROM
19 EUR

BEGINNER'S
CHOICE

amazon



Accessories

Storage, powerbanks, batteries, chargers, GPS



Micro USB 3 port hub OTG Simultaneous Charging & Transmission

This small sized USB hub has the size of a pen. It works for OTG (On-The-Go) enabled smartphones, thanks to the microUSB OTG connector, but can also be used for laptops (using included micro USB to USB-A connector) or can be connected to modern C-type USB devices using an adaptor. It is much recommended, since it permits powering the attached USB devices with a USB power supply connected to the female micro USB connector on the side. It also permits switching to different modes, in which you decide to allow also charging the connected smartphone.

Specifications

Small sized USB hub

Switch positions:

Position 1: closed

Position 2: OTG + Charging

Position 3: OTG alone

Micro USB to USB-A adaptor included

"Acasis H027" or "leagy" branded

OTG standard compatible and Charge mode

Support For Android, Win8, Win7, Vista, XP, Window 2000, ME, Linux And Other Operating Systems

USB 2.0 support

FROM
14 EUR

BEGINNER'S
CHOICE

amazon



Accessories

Storage, powerbanks, batteries, chargers, GPS



USB OTG Adapter USB OTG micro or USB-C connector

OTG technology allows your phone to connect flash drives, mouse, keyboards or controllers and other USB peripherals. Now you can enjoy videos, photos from a USB flash without connecting to the host. Use a keyboard or mouse to directly control your phone/tablet. With the right Android phone you can connect peripherals into it like Wi-Fi cards, SDR devices, etc.

But take care if the phone can serve enough power for them. If not, think about using a "Y-type" adapter or a USB hub with external power.

Specifications

USB type C adapter or micro USB

USB-A receptacle

Valid for modern Apple computers and new laptops

OTG specification

USB 2.0 / 3.0 / 3.1 compatible

USB Y-type model available

FROM
10 EUR

BEGINNER'S
CHOICE

amazon



Accessories

Storage, powerbanks, batteries, chargers, GPS



USB extender cables

Not just to extend, better for protecting

For many of the developments I have done during my professional work I have been using this kind of small sized extenders. Since these extenders are not really long enough to be used as extenders, it will help you in some different manners:

- When two or more USB female connectors are too close to connect to big USB peripherals (similar situation in Raspberry Pi 3 model B+).
- When even having space enough but it could damage the USB peripheral because it weights too much to lay on the USB port.
- If you need to keep a distance between two devices or between the board and the peripheral to avoid RF EMI interferences.
- When needing to distribute different components inside a case.
- When using big antennas in SDR or Wi-Fi devices.

Specifications

Angled 90 degree usb3.0 connector, save place, convenient for connection in narrow space

USB 3.0 extending cable, fast transmission rate; Double foil shield and inner membrane bilayer; Anti-interference safe and stable transmission; Twisted-pair cable, transfer rate up to 5 Gbps.

Backwards compatible with USB 2.0, 1.1, 1.0

Cable length: about 15CM;

Package included: 2Pack SuperSpeed USB 3.0 Male to Female Extension Cable (each of left angle and right angle)

FROM
8 EUR

BEGINNER'S
CHOICE


amazon



Accessories

Storage, powerbanks, batteries, chargers, GPS

Microhub USB 3.1 2-port

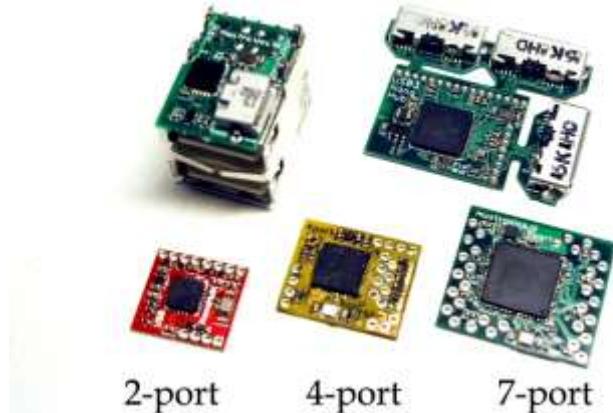

USB Hub micro-modules Micro USB hubs for your projects

This USB hub is really for hacking projects, by people who are comfortable soldering tiny wires. The NanoHub's connection points are spaced just right to use with standard 1.27mm (0.050") ribbon cable or flat USB cables. Because these aren't properly impedance matched wires, you will not be able to use more than approx. 400mm cable lengths reliably. Also, carefully observe and double-check the polarity of your wires. The correct pole designation is on the back of the board. Getting this wrong almost certainly means damaging the NanoHub and any attached USB devices. After building it into your project, in order to avoid accidental shorts, use heatshrink or kapton tape around the board to insulate it.

Specifications

11.6x12.4mm (0.457x0.488") footprint

1.52mm (0.06") thickness

0.35 grams (0.012oz) mass

Uses SMSC/Microchip USB2422 chipset

Less than 1mA in suspend and 70mA at full speed current consumption

ESD protected

1.5mm pitch eyelets

Full mechanical drawings and detailed specifications on muxtronics.nl


Available in USB 2.0 and 3.0 versions and in 2-7 ports

FROM
7 EUR



Accessories

Storage, powerbanks, batteries, chargers, GPS

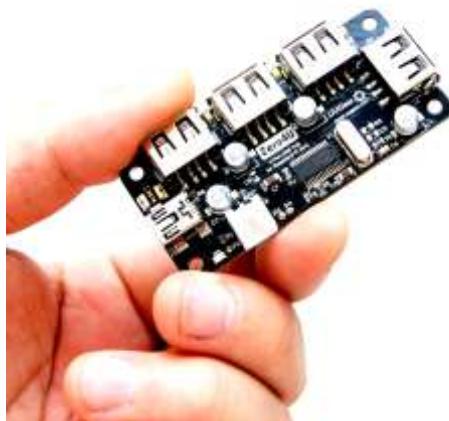

Zero4U USB Hub

3 more USB ports for your Raspi Zero W

This is a 4-port USB hub for Raspberry Pi Zero, and it can be mounted to Raspberry Pi Zero back-to-back. After mounting this USB hub to your Raspberry Pi Zero, it immediately has 4 USB ports that could transfer data in USB 2.0 high-speed. The 4 pogo pins on the back will connect the PP1, PP6, PP22 and PP23 testing pads on Raspberry Pi Zero, hence no soldering will be needed. The USB hub will take power directly from your Raspberry Pi Zero, so you don't need to power the USB hub separately. However you can use the JST XH2.54 connector on board as the alternative power input port. There are one blue LED on board as the power indicator, and four white LED aside the USB ports as transaction indicators. If you use this USB hub with other types of computer, you can use a USB cable (not included) to connect the mini-USB port on board to the up-stream USB port.

Specifications

65 mm x 30 mm x 9 mm

USB v1.1: 12 Mbps

USB v2.0: 480 Mbp

Upstream: 1 (mini-USB or via pogo pins)

On Raspberry Pi Zero: Self Powered

Bus-Power: maximum 500mA for all ports

Self-Power: maximum 2A for all ports

Output voltage: 5V DC

LEDs: 1 blue for power, 4 white for ports activity

FROM
12 EUR



Accessories

Storage, powerbanks, batteries, chargers, GPS



USB power monitor

Monitors and logs USB power details

This electronic tool is very useful for those who create their own electronic projects, to help them to measure the electrical conditions of their projects. This powerful tool measures in a MiTM position the voltage and power consumption in amps of any connected USB device. Many electronics projects fail or are unstable because the components are not getting enough stable power. With this tool you will be able to monitor the power peaks of any USB device. There is one model with BLE connectivity (UM24C) and another just with the LCD screen (UM24).

Specifications

| | |
|---------------------------------|------------------------------|
| Voltage measurement range: | 4.50-24.00V |
| Current measurement range: | 0.000-3.000A |
| Capacity accumulation range: | 0-99999mAh |
| Energy accumulation range: | 0-99999mWh |
| Load impedance range: | 1.5-9999.9Ω |
| Screen brightness setting: | 0-5 level |
| Voltage graphing range: | 04.5-24.0V |
| Display screen: | 1.44 Inch colour LCD display |
| Refresh rate: | 2Hz |
| Voltage measurement resolution: | 0.01V |
| Current measurement resolution: | 0.001A |
| Voltage measurement accuracy: | ±(0.2%+1 digit) |
| Current measurement accuracy: | ±(0.8%+3 digit) |
| Time measurement range: | 0-99h59min59s |
| Auto screen off time: | 1-9mins |
| Current graphing range: | 0.00A-3.00A |
| Quick charge recognition modes: | QC2.0 / QC3.0 |

FROM
10 EUR

BEGINNER'S
CHOICE

AliExpress



Accessories

Storage, powerbanks, batteries, chargers, GPS



U2 Current/Voltage Meter USB Advanced USB power analyser

WEB-U2 Current Voltage Meter is a new USB power analyser with very advanced features such as real time voltage and current monitoring, PD3.0 PPS QC 4.0 compatible messaging monitoring, charge protocol detection and event sniffing with packet capture, charge temperature monitoring (with optional USB probe), USB cable type detection, Huawei, iphone, Samsung and other manufacturers protocol detection with serial number recognition, overvoltage and overcurrent detection and protection and computer interfacing for long time recording. In some testing scenarios you'll also need a USB load to test the current delivered. This device incorporates a gravity sensor to rotate the screen as necessary.

If you need a regulated USB load:

https://www.banggood.com/JUWEI-QC2_03_0-35W-USB-Electronic-Load-Adjustable-Constant-Current-Aging-Resistor-p-1193887.html

If you need the temperature probe accessory:

<https://www.banggood.com/DANIU-NTC-Temperature-Probe-Temperature-Sensor-Probe-Acrylic-Panel-and-CNC-Aluminum-Alloy-Case-For-WEB-U2-p-1369154.html>

Specifications

| | |
|---------------------------------|-------------------------------------|
| Voltage measurement range: | 4-24V |
| Voltage measurement resolution: | 0.0001V |
| Current measurement range: | 0-5A |
| Current measurement resolution: | 0.0001A |
| Capacity accumulation range: | 0-99999Ah |
| Energy accumulation range: | 0-99999Wh |
| Display screen: | 1.77 Inch color TFT 128x160 display |
| Product size: | 52.5mm x 34.5mm x 13.0mm |
| Chipset: | STM32F072 ARM Kernel |

FROM
31 EUR

Banggood
Shopping with fun
Best Bang for Your Buck



Accessories

Storage, powerbanks, batteries, chargers, GPS



USB Kill v3 System destroyer device

The USB Killer is a CE Approved and FCC Approved testing device designed to test the surge protection circuitry of electronics to their limits - and beyond. When plugged into a device, the USB Killer rapidly charges its capacitors from the USB power lines. When the device is charged, -200VDC is discharged over the data lines of the host device. This charge/discharge cycle is repeated many times per second, until the USB Killer is removed. Simply put: used on unprotected equipment, the USB Killer instantly and permanently disables the target hardware.

It does not require batteries, and it can be used an unlimited number of times. Its compact size and flash-drive style housing makes it an important device in every pen-tester's toolkit. The USB Kill V3.0 also comes in an anonymous edition: without any logo or branding, in a generic USB Flash Drive case.

Specifications

Input voltage: 4.5 - 5.5 VDC

Output voltage: -215 VDC

Pulse Frequency: 8 - 12 times / second

Pulse current: ≥180A

Standards: CE & FCC Approved


FROM
55 EUR

 **USB KILL**



Accessories

Storage, powerbanks, batteries, chargers, GPS

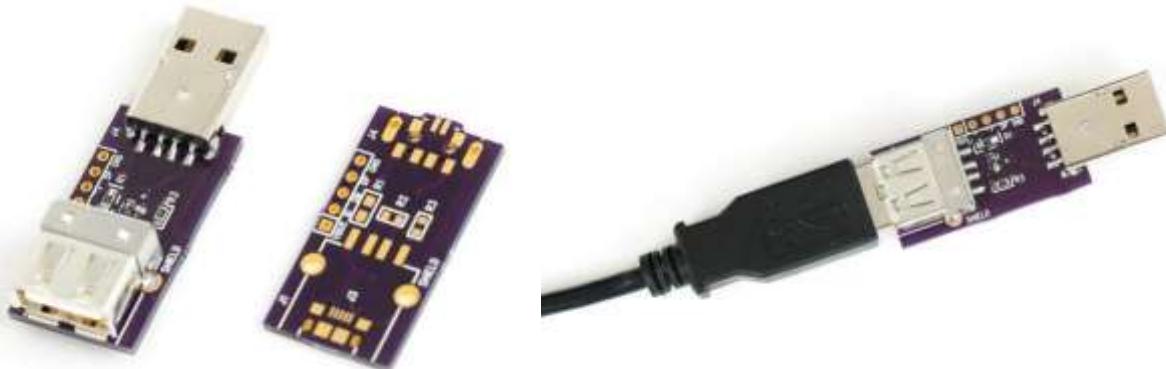

USB condom The original USB condom

The Original USB Condom prevents accidental data exchange when your device is plugged into a foreign computer or public charging station with a USB cable. The USB Condom achieves this by blocking the data pins in the USB cable and allowing only power to flow through. It can block all the known attacks, like HID, ADB injection, etc. just by blocking the Data pins of the USB bus, but also allowing DC 5V supply or charge. It is also very useful for USB testing since it has exposed pins for connecting to testing devices.

SyncStop is the name of the 'cased' version of the original USB Condom. We listened and spent some time designing and manufacturing our own enclosure.

Specifications

| | |
|--------------------------|-----------------------|
| Input voltage: | 4.5 - 5.5 VDC |
| Output voltage: | bypass |
| Input connector: | USB type-A receptacle |
| Output connector: | USB type-A male |
| Exposed pins: | 2.5" pin headers |

FROM
7 EUR

BEGINNER'S
CHOICE

SyncStop



Accessories

Storage, powerbanks, batteries, chargers, GPS



Multimeter Ideal for your electronic projects

The HOLDPEAK HP-770D Digital Multimeter is a practical tool for electricians, hobbyists, and general household use. It is easy to operate and features many different functions for measuring current, voltage, and resistance, as well as continuity, transistor, and diode testing. It can be used to diagnose, assemble, and repair circuitry and wiring. Other features include a low battery indicator, continuity buzzer, and overload protection.

Specifications

| | |
|---|---------------------|
| Max Display: | 40000, 3 1/2 digits |
| Range selection: | Auto ranging |
| Overload display: | Display OL |
| DC Voltage: | 40mV-1000V |
| AC Voltage: | 40mV-750V |
| DC Current: | 400uA-20A |
| AC Current: | 400uA-20A |
| Resistance: | 40Ω~40MΩ |
| Auto LCD Backlight | Present |
| Overload protection | Present |
| Data Hold | Present |
| Diode Test | Present |
| Auto power off | Present |
| True RMS | Present |
| Relative Value | Present |
| Continuity Test | Present |
| Non Contact AC Voltage (NCV) detection | Present |
| Max Display: | 40000, 3 1/2 digits |

FROM
45 EUR

amazon



Accessories

Storage, powerbanks, batteries, chargers, GPS



Aiyima 8686 Soldering Kit Ideal for your electronic projects

This soldering / SMD desoldering station is the ideal solution for electronics beginners, since its price and quality balance offers a good product for them. This kit includes all the necessary tools, spare parts and accessories for accomplishing all your needs, without having to invest a buck more. Today, hacking and electronics are two subjects that are closely related.

Specifications

| | |
|---------------------------------|-----------------|
| Hot air gun power: | 700W |
| Hot air station temperature: | 100-450 degrees |
| Airflow: | 120 L |
| Brushless fan | Present |
| Noise: | < 45dB |
| Soldering hot iron temperature: | 200-480 degrees |
| Soldering hot iron power: | 60W |
| Temperature stability: | <2 degrees |
| Voltage: | 110V/220V AC |

FROM
42 EUR

AliExpress



Accessories

Storage, powerbanks, batteries, chargers, GPS



TSI00 smart soldering iron Portable Adjustable digital solder iron

TS100 smart electric soldering iron kit is a portable and easy-to-use electric soldering iron adopting the internal Heating working mode with dual temperature sensor and acceleration extreme cooperate, reach the set the temperature only few seconds. It built-in MT32 acceleration sensor chip enable you to update the firmware or parameter setting via computer. OLED screen to display the parameter with large temperature adjustable range (100-400 Celsius degree). It is small just like a pen with DC12-24V working voltage and DC5.5*2.5 (5525) power port easy and safe to use, the indispensable tools for electronic worker (Just use your laptop charger if it uses this connector). Read the review in: <https://hackaday.com/2017/07/24/review-ts100-soldering-iron/>

Specifications

| | |
|--------------------------------------|---|
| Power: | 40-65W |
| Input Voltage: | DC 12-24V (order it with DC power supply) |
| Power Supply Port: | DC 5.5*2.5mm |
| Temperature Adjustable Range: | 100-400 Celsius degree |
| Temperature Stability Range: | ±2% |
| Working Temperature: | 300 Celsius degree(default) |
| Sleep Temperature: | 200 Celsius degree(default) |
| Overall Length: | 168mm/6.61inch (after installed bit) |
| Functions: | Quick heat up (11 secs To max temp.) / Auto sleep |
| Accessories: | Travel box / Multiple sizes tips / spare parts |

FROM
60 EUR

AliExpress



Accessories

Storage, powerbanks, batteries, chargers, GPS



TS80 smart soldering iron Portable Adjustable digital solder iron

The company that makes one of the best portable soldering irons, the TS100, has recently released a new model, the TS-80! Many people love the TS100 because of the small form factor and portability. What if I tell you that the TS80 is even smaller! The TS-80 shell is made of anodized aluminium and feels to have better build quality over the TS100, which is just plastic. For this reason, the TS80 is actually heavier, at 35g, while the TS100 weighs only 31g, despite being bigger. The TS80 is easier to hold than the TS100 thanks to more ergonomic grip. Note that the TS80 also has a shorter grip-to-tip distance, which helps with soldering precision. The grip on the T80 is actually removable so I supposed there would be an upgraded grip in the future? One of the biggest differences between the TS80 and TS100 is perhaps the input power. The TS100 can be powered by a DC input voltage between 12V-24V, via a 5.5mm barrel connector. That's probably the reason why the FPV and RC community love it so much, as you can simply use a 4S to 6S LiPo to power it. Very handy for field repairing too.

Specifications

| | |
|-------------------------|--|
| Temperature Range: | 100 degree to 400 degree (Max) |
| Power Input: | 3.6V-6.5V/3A, or 6.5V-9V/2A, or 9V-12V/1.5A ~ (QC 3.0) |
| Data/Power Interface: | USB Type-C |
| Temperature stability: | ±3% |
| Display: | OLED |
| Control part: | Length 95.5mm, Diameter: 13mm |
| Heating part: | Length: 60+40mm, Diameter: 10.6mm |
| TS80 Controller Weight: | 36.5g |

FROM
85 EUR

Banggood.com Shopping with fun
Best Bang For Your Buck



Accessories

Storage, powerbanks, batteries, chargers, GPS



TS-100 / TS-80 carry case Portable Adjustable digital solder iron

This is the original portable carry bag for TS100 electric soldering iron set. This small organizer bag is made from PU leather and microfiber with zipper closure. Single layer and 3 elastic loop strap to store one TS100 soldering iron and 2 solder tips tightly It can also be used as a small tool pouch to hold screwdriver, nut driver, pen or other little gadgets.

Specifications

Size(L*W*H): 165mm*50mm*25mm

Material: PU leather & microfiber

Capacity: Solder Iron & 2x tips

FROM
10 EUR

Banggood.com Shopping with fun
Best Bang For Your Buck



Accessories

Storage, powerbanks, batteries, chargers, GPS



TS-I00 / TS-80 stand Small, portable soldering iron stand

T-Stand is made of zirconia grouting and subjected to 24-hour sintering at a high temperature of 1500 ° C to produce 4 colours in different processes: matte black, matte white. T-Stand with wear-resistant, high temperature, heat insulation and other characteristics, the appearance of light, refined, suitable for rapid welding and welding in a narrow space when the special needs, it is not only iron support, but also has a clean iron, solder function. It includes two natural sponges. The metal holder is spring-loaded (brought when raised). The bottom of the supposedly non-slip material, but i was not impressed: the stand can be sent on a trip for a few cm on a smooth table of chipboard with a simple click (although painful-it is heavy). The price seems too high, but in general-i recommend.

Specifications

Material: Zirconia

Box Material: PC transparent protection box

Product Size: 35mm * 40mm * 8.5mm

Product Weight: 26.7g


FROM
10 EUR

Banggood .com Shopping with fun
Best Bang For Your Buck



Accessories

Storage, powerbanks, batteries, chargers, GPS

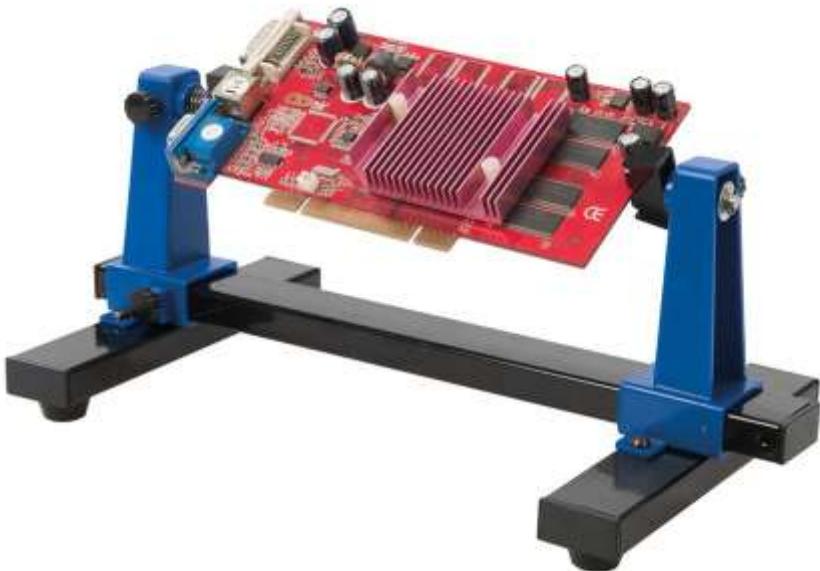

Universal Clamping Kit 360 degree Soldering & inspection stand

There are a lot of different stands for soldering components into a PCB. Many of them are too small or do not offer a stable support for soldering. This model has a medium size and it is very stable for holding the PCB. Of course, many board will not fit into this stand, but it's a nice stand to help you with your soldering work.

Specifications

Rigid metal structure

Rubber feet for stability

Can be rotated 360°

Adjustable base & clamps for holding various sized pc boards

FROM
9 EUR


BEGINNER'S
CHOICE

amazon



Accessories

Storage, powerbanks, batteries, chargers, GPS

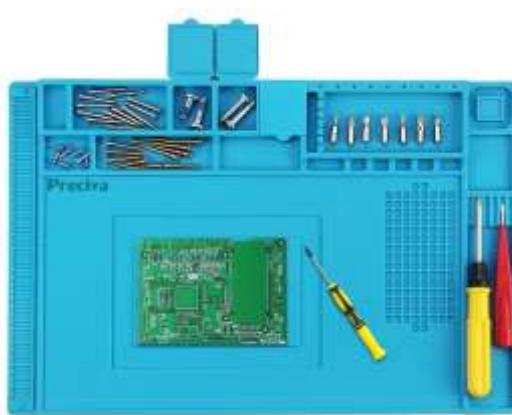

Anti-Static Soldering Mat Heat-resistant Magnetic Multi-purpose Work Station Pad for Soldering

Soft silicone, free to fold, easy to roll and store. It can be directly rubbed with water thinner, excellent anti-sticking performance, AB glue; quick-drying glue cannot stick. Preciva soldering station mat can isolate from high temperature, to prevent repair station carbonization, reduce poisoning, good for health. Considering that when some little parts will be taken apart, and maybe lose carelessly, so we adding the parts box for users to store some little parts easily. Screw positioning area efficiently allocates smaller screw components to help you find the parts you need more precisely and faster. Screwdriver is one of the most commonly used tools for maintenance, so the characteristics of the magnetic field plus screwdriver are more essential. Positioning holes can be used for common screwdrivers and tweezers. For tipped or easily damaged tools such as tweezers, the holes provide protection and longer tool life.

Specifications

Non-Toxic Material: Made of high silicone, the Preciva soldering mate is non-toxic, anti-static, environment-friendly, resists corrosion and won't deformed.

Excellent Heat Resistance: The soldering station mat has a good heat resistance, that can be insulate 500 celsius degree, which makes it protect the maintain platform from being burned. Even the heat iron can be put on the silicone soldering mat directly.

Muti-function: With different classification of the parts box, screw position, circuit board location, tool suppliers area, magnetic position, the magnetic soldering mat can not only serve as a heat insulation mat but also can help you clear your working platform to improve your working efficiency.

Widely Applications: Preciva antistatic soldering mat is really an ideal products for your repairing, such as phone, laptop, computer, sports watch, camera, smart toy, eyeglasses, etc.

FROM
15 EUR

BEGINNER'S
CHOICE

amazon



Accessories

Storage, powerbanks, batteries, chargers, GPS



Yoctosun Soldering Glasses Interchangeable/Replaceable Lenses

The head mount magnifier comes with 5 magnification power lenses of 1.0X, 1.5X, 2.0X, 2.5X, 3.5X, which can deliver bi-plate magnification powers of 3.0X, 4.0X, 4.5X, 5.0X, 5.5X, 6.0X. The lenses are made of high quality ABS moulded acrylic, providing clear and undistorted texts and images. With clamps on the head gear, users can set two lenses at a time for easy flipping or switching from one magnification power to another. It comes with a detachable and rotating head lamp which illuminates images. The light box comes with 2 bright white LEDs that are powered by 3 AAA batteries (not included). Once detached, it can serve as a stand-alone reading lamp or flashlight. Flexible and hands free operation is to be expected from this led head magnifier. It's a convenient and versatile vision aid for those who work on tiny parts and intricate art and craft designs.

Specifications

Headband magnifying glasses with lights hands free visor lamp loupe lens, bring hands-free variable magnification detail views to hobby.

5x interchangeable, inter-convertible and detachable lenses with storage box (lens magnification power marked in the middle of lens) Lens can swing up out of the way.

Single-plate lens magnification: 1.0X, 1.5X, 2.0X, 2.5X, 3.5X, bi-plate lens magnification: 3.0X, 4.0X, 4.5X, 5.0X, 5.5X, 6.0X.you can choose to use them singly or two at a time.

Comfort fit head band is adjustable using head gear tightening knob,LED light can be rotated about 60 degree and light source box can be used separately as lighting source after being dismantled.

FROM
14 EUR

amazon



Accessories

Storage, powerbanks, batteries, chargers, GPS



Lab DC Power supply Switch ON/OFF external devices

Professional power supply design with intuitive operability, and fast and accurate selection of voltage and current. Low noise and ripple. CV/CC given voltage and constant current mode. Built-in set of parameters stored. Intelligent temperature control fan to effectively reduce the operating noise. To prevent damaging to the load, you can set an over-voltage protection and over-current protection. The panel buttons can be locked in order to prevent undesirable results that can damage the connected device. It offers up to 5 user-programmable pre-set settings. Just press the button to recall or store the fixed settings.

Specifications

Input voltage : 220V +/-10% (50- 60Hz)

Output Voltage Range : 0-30V DC

Setup Resolution : 10 mV

Setup Accuracy : <0.05% +20 mV

Ripple : < 1mVRMS

Read back Accuracy : 10 mV

Output Current Range : 0-5A Continuously adjustable

Setup Resolution : 1 mA

Setup Accuracy : <0.1% +3 mA

Dimensions : 4.3 x 6.1 x 10.25 inch (110 x 156 x 260mm)

FROM
52 EUR

AliExpress



Accessories

Storage, powerbanks, batteries, chargers, GPS



SainSmart DSO Note II Handheld Mini Digital Oscilloscope

This pocket-sized device has a weight of 5.6 ounces and overall measurement of 5.9 x 3.6 x 2 inches. With its small size, this o-scope is easy to use too. In fact, you can use it easily through its one button in the touch area as well as gestures of one-click, double-click, press, and slide. Featuring 320x240 displays with 8M of memory card, this o-scope is suitable to use for academic experiments, electronics maintenance and engineering and many more. With its small size, this device is easy and convenient to use as well as SD card, USB flash, and USB charging. Other than that, since it uses a chargeable battery, this o-scope is suitable for use every day and everywhere.

Specifications

| | |
|----------------------------------|--|
| Channels: | 2 analog channels, 1 operation channel |
| Analog Bandwidth: | 1 MHz |
| Max Sample Rate: | 10 MSa/s 8K depth |
| Horizontal Sensitivity: | 1uS/div to 2S/div (1-2-5 sequence step) |
| Vertical Sensitivity: | 20mV/div to 10V/div (1-2-5 sequence step) |
| Analog Input Impedance: | 1 MΩ |
| Coupling: | DC/AC |
| Trigger Mode: | ascend/descend edge trigger mode |
| Math Waveforms: | -A, -B, A+B, A-B, RecA, RecB, RecC |
| Inbuilt Signal Generator: | sine/square/triangle/sawtooth wave |
| Synchronous Mode: | auto, normal, single, none, scan value/average |
| Storage: | 8 MB flash disk memory |
| USB Port: | Micro USB |
| Battery: | 500 mAh |
| Screen: | 2.8" TFT LCD with 320x240 px |
| Dimension: | 100 x 56.5 x 10.7 mm (90g) |

FROM
119 EUR

amazon



Accessories

Storage, powerbanks, batteries, chargers, GPS



Electronics Microscope Circuit examination microscope

This is a digital microscope that can be continuously magnified 800 times. It has a 4.3-inch display and the object that being observed appears directly on the screen. At the same time, the elevation angle of the display can be adjusted freely within a certain range, which is convenient for the user to observe in multiple directions. The image can be saved to an microSD card or transmitted real-time to PC as a webcam. It works very good but it's necessary to isolate it from external daylight making a box around it.

<https://www.youtube.com/watch?v=M7KdqTisg8Y>

Specifications

4.3" HD LCD screen

800X zoom magnification

8x white LED

Material: ABS + metal plate

USB rechargeable with included 4000mAh battery

microSD card slot for picture taking

Focus knob

5 Megapixel real-time image

USB image transmission to a computer as webcam

FROM
34 EUR

BEGINNER'S
CHOICE

AliExpress



Accessories

Storage, powerbanks, batteries, chargers, GPS



Electronics Tool kit 73p. Pro Electronics Repair Tool Kit

This professional tool kit includes up to 73 Pieces. The most commonly reached for tools when doing computer maintenance, IT upgrades and repair tasks on electronic devices including specialty tools and bits and precision equipment. Give yourself a lasting professional result to maintenance and repair tasks with the right set of tools. Most common tools as used by electronics repair technicians, IT guys and gamers. It includes many tools to open modern cases that are plastic soldered. Includes pentalobe bits for use on Apple devices. Since no available kit is perfect you'll need to complement it with some other professional tools. If you need to carry the tools out of your lab, it will be recommendable to find another soft case to carry them. Remember that the actual EU regulations just limit the following tools to be carried inside the hand-luggage: "*tools with a blade or a shaft of more than 6 cm capable of use as a weapon, such as screwdrivers and chisels*".

Specifications

Tamper-Resistant Pentalobe: 0.8 ,1.2 ,1.5

Triangle: TP2 ,TP2.7, TP3.2

Torx: T4, T5, T6, T8

Phillips: PH000, PH00, PH0

Slotted Metric: 1.0mm, 1.5mm, 2.0mm

Hex Metric: 0.8, 1.5, 2, 3mm

175mm Flexible Extension Rod

Device Disassembly Tools, Pry Tools

Adjustable Wire Strippers and cutter

Pliers Set

AC Voltage presence Tester

FROM
20 EUR

BEGINNER'S
CHOICE

amazon



Accessories

Storage, powerbanks, batteries, chargers, GPS



Metabo 26 pieces kit Quality tools will last forever

The bits in this Metabo 26 Piece Bit Set are made from chrome-vanadium-steel (S2-Quality), and features colour ring coding for quick and easy identification. With high quality, maxi drive ratchet sockets made from chrome vanadium steel. Supplied in a high quality, robust storage box with unique Metabo design. Also has an extendable toolbar hanger.

Specifications

- 3 x 25mm Phillips Bits: PH1, PH2, PH3
- 3 x 25mm Pozidriv Bits: PZ1, PZ2 & PZ3.
- 3 x 25mm Hex Bits: H3, H4, H5 & H6.
- 3 x 25mm Slotted Bits: SL4, SL5.5, SL6.5.
- 5 x 25mm Torx Bits: TX10, TX15, TX20, TX25 & TX30.
- 5 x 1/4in Maxi-Drive Sockets: 6, 7, 8, 10 & 13mm.
- 1 x Extension Bar
- 1 x Gear Wrench

FROM
25 EUR

BEGINNER'S
CHOICE

amazon



Accessories

Storage, powerbanks, batteries, chargers, GPS



iFixit Opening Toolkit The essential tools to open every new toy

Get started in electronics repair with all the bits and precision tools to handle your most urgent screen breaks and battery swaps. Upgrade your home DIY toolkit with what you need to service door knobs, home appliances, eyeglasses, and more! The iOpener is a tablet opening tool designed to apply heat directly and evenly to case components joined with adhesive. Once the adhesive is softened with heat applied by the iOpener, the adhesive can be sliced using the many tools included in the iOpener kit. This toolkit is designed specifically for the iPad, but works with all tablets, smartphones, or other electronics needing heat application in the disassembly process. The iOpener can be heated in your microwave. It is reusable, non-toxic, and food safe.

Just enter iFixit home website to get a lot of hardware disassembly guides and video tutorials:
<https://www.ifixit.com/>

Specifications

High quality thin flexible steel blade easily slips between the tightest gaps

Ergonomic flexible handle allows for precise control

Also favourite tool for watch makers to change watch batteries

Material: 6150 Steel

A simpler and safer way to open a glue-laden device

Heated in a microwave, the iOpener softens adhesive

The kit is designed to service every generation of Apple iPad, but can also be used for many more devices

FROM
8 EUR

BEGINNER'S
CHOICE

AliExpress



Accessories

Storage, powerbanks, batteries, chargers, GPS



Infrared BGA rework machine BGA SMD SMT desoldering Rework Station

How many times have you seen a bad graphics card or a laptop which graphics card was failing? The most of these cases are related to BGA (Ball Grid Array) chips that after a lot of overheating times got miss-contacts in its solders. Sometimes just reworking or heating solves the problems. Other times you need to substitute the chip with a new one, or if you are a hardware hacker you could want to desolder the SOC to access to the JTAG/SWD pins on the bottom of it because there were no headers. Sometimes you need to desolder an EEPROM or a flash chip to read its contents. All of these are situations in which you need the help of a BGA rework machine.

There are some unpacking and howto video tutorials in Youtube:

<https://www.youtube.com/watch?v=RrA-trDZPNs>

<https://www.youtube.com/watch?v=cV9QDgrL5fU>

Specifications

Working voltage : AC220/110v 50/60Hz

Output power: 800W

Temperature: 100-350 degree

It can weld all the component of 15x15-35x35mm.

650W heating system.widely to 120x120mm

FROM
127 EUR

AliExpress



Accessories

Storage, powerbanks, batteries, chargers, GPS



Electronics fun Kit For learning basic electronics

This is a great add-on to Arduino or raspberry pi. It comes with more than 300pcs sensors and components, all components are carefully bagged, most of them bagged separately, with combined bags pretty logical. We provide more number of resistors (220 ohm 40pcs and other value 20pcs, but other sellers only 10pcs each value), so that you are enough to use, don't need to spend extra money to buy. The breadboard comes with a power supply; you can set one side for 5VDC, and the other for 3.3VDC. It has a push switch to turn the power on or off. In addition, we also provide a male to male USB Power Cables, this is hard to find, but other sellers do not provide.

Specifications

Breadboard plus power supply module (5V, 3.3V) and USB connector to power on

300 pcs. Sensors and components included

Kit of jumper wires of different types, Pin headers

74HC595 consists of an 8-bit shift register and a storage register

4N35 is a 4-terminal universal optocoupler that blocks the electrical connection

Active buzzer and passive buzzer

PN2222 NPN Transistor

Diodes, NPN transistors, resistors, capacitors, potentiometers, photoresistors, thermistors,

Colour LEDs and RGB LEDs

FROM
17 EUR

BEGINNER'S
CHOICE

amazon



Accessories

Storage, powerbanks, batteries, chargers, GPS



2x Relay GPIO module Switch ON/OFF external devices

Two-Channel 5V Relay Module with Optocoupler Low Level Trigger for Arduino can switch quickly and reliably, even with low power, and are ideal for use with Arduino.

Relay Modules can switch up to 250V 10A AC or 30V 10A DC. Practical mounting holes allow the module to be securely mounted in enclosures, and due to its compact size, module is usable for many Arduino based projects.

Specifications

2-channel 5V relay module with optocouplers

Perfect for driving up to 2 devices with larger current

Microcontroller compatible board

Max. 250V AC / 10A or 30V DC / 10A.

Dimensions (L x W x H): 50 mm x 38 mm x 19 mm.

FROM
6 EUR

amazon



Accessories

Storage, powerbanks, batteries, chargers, GPS



Relay boards for Raspi Switch ON/OFF up to 3x external devices

The Waveshare Raspberry Pi Relay Boards gives your Pi the ability to control high voltage/high current devices, easily makes normal home appliances become intelligent. The 3x Relay board fits perfectly for Raspberry Pi Model 3B+ and the 8x Relay board fits for both models.

Relay Modules can switch up to 250V 10A AC or 30V 10A DC. Practical mounting holes allow the module to be securely mounted to your Raspberry board using the 40 pin Raspberry type header.

Specifications

Supports Raspberry Pi A+/B+/2B/3B/3B+

High quality relays, loads up to 5A 250V AC or 5A 30V DC

Opto-coupling isolation, prevent interference from high voltage circuit

Onboard LEDs for indicating relays status

Relay control jumper, allows to control the relays by custom pins other than the default pins

Development resources, with examples in wiringPi, WebioPi, shell, python, and bcm2835, python, python-bottle (webpage control), and crontab (cron job)

Reserved control Interface, allows to work with controllers like PLC

Standard rail mount bottom case (8x model)

Contact form: SPDT-NO,NC

Closed current: 6mA (per channel)

FROM
20 EUR

amazon



Accessories

Storage, powerbanks, batteries, chargers, GPS



Rii KOIXI USB keyboard 2.4 GHz Mini Wireless Keyboard with Touchpad

Don't use complicated Bluetooth keyboards that don't work properly when you need them. This small sized keyboard plus mouse pad works in every situation. Even if you use it for your Raspberry Pi in outdoor hacking environments or if you need it to control any computer, this is the easiest way to do it. The world's first Touch Pad 90-degree flip design With a 90-degree flip a switch function key Touch Pad, allows you to be more human mode of operation to achieve click, scroll, and the mouse click action.

Specifications

Product Dimensions: 15 x 8 x 1.5 cm

Boxed-product Weight: 59 g

Batteries 1 Lithium ion batteries required. (included)

Product Dimensions: 15 x 8 x 1.5 cm

Qwerty keyboard and ordinary keyboard layout

RF 2.4G wireless connection, enjoy up to 10m operating distance

Ultra-sensitive touchpad with 90-degree flip design

Built-in rechargeable polymer Lithium-ion battery

FROM
16 EUR

BEGINNER'S
CHOICE

amazon



Accessories

Storage, powerbanks, batteries, chargers, GPS



USB charger / supply 60W 6x 2.4A power charge/supply ports

Engineered to refuel devices up to 4x faster than conventional charging. Powered by INOV (Intelligent Negotiation for Optimum Voltage) Technology for fine-tuned power output and more optimized charging cycles. Up to 45% more efficient than Quick Charge 2.0 & compatible with a full range of USB connector types, from A to C. Tuned to support healthier battery function and faster USB charging speeds, AiPower intelligently adjusts power output to match the unique charging needs of all your USB powered gear. With up to 2.4A of dedicated adaptive output per Ai USB port, your devices will each receive the safest maximum recharge rate possible. Advanced circuitry and built in safeguards to protect your devices against excessive current, overheating, and over charging. Universal Compatibility Designed to work with all popular USB powered devices from iPhones to Android phones, tablets, Bluetooth speakers and more. Whatever USB powered gear you've got, we've got you covered.

Specifications

Input: AC 100-240V

Output: (Quick Charge 3.0) 3.6V-6.5V 3A, 6.5V-9V 2A, 9V-12V 1.5A
(Standard) 5V / 2.4A

Dimensions: 4.06"×2.80"×1.02"

Weight: 7.29 oz

FROM
35 EUR

amazon



Accessories

Storage, powerbanks, batteries, chargers, GPS



High power Powerbank With enough power for high consumption applications

20000mAh Power Bank charges the iPhone 7 6 times, the Galaxy S8 4.7 times or the 9.7-inch iPad Pro 1.5 times, ideal for weekends away and long journeys, travels. Charging 4 devices at the same time, and automatically detects your devices and delivers the fastest possible up to 2.4A per port or 4.8A overall. Unique Dual USB 4A input halves the charge time, takes only 6 hours to fully charge it when sleeping. EasyAcc Power Bank with Built-in LED flashlight for dark or low-light environments.

Specifications

Capacity: 20000mAh/74Wh

Battery type: Lithium-Ion battery cell

Input: DC 5V 4A (max).

Two different inputs for fast charging.

Output: DC 5V 4.8A (max)

Size: 6.57 x 3.1 x 0.86 in.

Weight: 454 grams

FROM
30 EUR

amazon



Accessories

Storage, powerbanks, batteries, chargers, GPS



USB Li-Po charger module Charges any Li-Po 3.7V battery

The board charges a lithium ion cell with up to 1000 mAh charging current in any size (for example, 18650 cells with 2600 mAh removed from an old laptop battery). This means that with the module you can also charge lithium batteries that have a larger capacity than 1000 mAh. Charging time depends on input current. You can supply the charging current with a voltage of 5 V via mini USB cable or solder charging cable to the "+" contacts next to the USB port. For charging with the USB cable, any USB port from a mobile phone charger or computer is suitable. For example, I-Phone power supplies or a USB port on a PC USB HUB.

If a consumer is connected to the "out pin", the board switches off the output as soon as the battery level has fallen to 2.5 V. Also with a short circuit on the OUT+ and OUT pins. It can charge current while a consumer and a Li-Po battery are connected. For example, for solar cells that provides 5 volts and sufficient charging current.

Specifications

| | |
|-----------------------------------|------------------------|
| Dimensions (L x W x H): | 26 x 17 x 2 mm. |
| Switch-off voltage when charging: | 4.2 V + - 1% |
| Under voltage protection: | <2.5vol. |
| Short circuit protection: | > 3 amps. |
| Input voltage: | 4.5 to 5 V. |
| Available input connector: | mini USB and micro USB |
| Maximum charging current: | 1000 milliamperes. |
| Output voltage: | Battery voltage. |

FROM
1 EUR

amazon



Accessories

Storage, powerbanks, batteries, chargers, GPS



Adafruit Powerboost 1000 basic Power supply for your project

PowerBoost is the perfect power supply for your power-hungry portable project! This little DC/DC boost converter module can run from 1.8V batteries or higher, and convert that voltage to 5.2V DC for running your 5V projects. With a beefy 4A DC/DC converter, it can give you 1A+ from as low as 2V. Like our popular 5V 1A USB wall adapter, we tweaked the output to be 5.2V instead of a straight-up 5.0V so that there's a little bit of 'headroom' long cables, high draw, the addition of a diode on the output if you wish, etc. The 5.2V is safe for all 5V-powered electronics like Arduino, Raspberry Pi, or Beagle Bone while preventing icky brown-outs during high current draw because of USB cable resistance.

The PowerBoost 1000 has at the heart a TPS61030 boost converter from TI. This boost converter chip has some really nice extras such as low battery detection, 4A internal switch, synchronous conversion, excellent efficiency, and 700KHz high-frequency operation. Great for powering your robot, Arduino project, single-board-computer such as Raspberry Pi or BeagleBone! Each order comes with one fully assembled and tested PCB, a loose 2-PH JST jack, a 2-pin Terminal block and a loose USB A jack. If you are powering your project from USB, solder the USB A jack in (a 3-minute soldering task). Then choose either JST for input (JST is often used for our Li-Ion batteries, but the connector is only rated for 2A) or a terminal block. The 1000 version comes with a 2-pin terminal block so you can solder it to the output spot where the USB jack would go. Or don't solder any connectors in for a more compact power pack and go with 22AWG wires soldered directly in.

Manual and detailed description:

<https://cdn-learn.adafruit.com/downloads/pdf/adafruit-powerboost-1000-basic.pdf>

Specifications

Dimensions (L x W x H): 29mm x 23mm x 2mm / 1.1" x .9" x .1"

Weight: 6.0g

Efficiency: 90%+ operating efficiency

Charge rate: On-board 1000mA charge-rate


FROM
16 EUR

amazon



Accessories

Storage, powerbanks, batteries, chargers, GPS

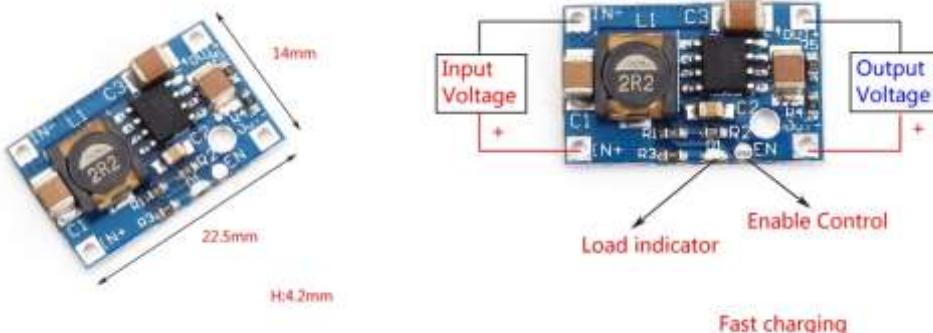

DC-DC step up, 5V output The complement for your Li-Po battery

It is a USB DC step up isolated power supply module. It can be used as ordinary buck power supply module, charger and LED constant current driver. Simple and efficient, practical. It supports fast charge and up to 3A current output. The DC input voltage must be between 2.5V and 5V and it offers a regulated output voltage about 5V, which makes it a good option for converting Li-Po/Li-Ion batteries voltage (3.6V/3.7V) to typical USB voltage (5V). It is a very cheap and valid option for your electronics projects.

Specifications

| | |
|------------------------|--|
| Product Name: | DC Fast Charging Step Up Power Supply Module |
| Working Voltage: | DC 2.5V-5.0V |
| Output Voltage: | DC 4.9V-5.3V |
| Output Current: | 3A(But long-term work is recommended below 2.5A) |
| Conversion efficiency: | About 95% |
| Output ripple: | About 80mV |
| Size: | 22.5*14*4.2mm |
| | There is a LED load indicator. Weak flash when no load, the greater the load, the higher the brightness. |
| | 'EN' is enable control port. Default enabled. User need remove resistor R2 if user need control enable by other such as button. High level TTL signal to turn ON enable and low level TTL signal to disable. |
| | Due to the large current, it is recommended to use a thicker wire. Wire cross-section greater than 1.5 square millimetres. |
| | Wire cannot be reversed. Otherwise the module will be damaged. |

FROM
0.7 EUR

amazon



Accessories

Storage, powerbanks, batteries, chargers, GPS



snapVCC 3.3V / 5V regulator Snaps onto 9V batt to power your devices

SnapVCC is a highly portable and convenient power supply for your electronics projects. It's designed to fit right on a 9V battery and give you 3.3V or 5V power wherever you need it. Many circuits require a regulated 3.3 or 5 volt power supply. The 9V battery is an easily available power supply option. A common way to power circuits using a 9V battery is to use a Linear regulator IC circuit to drop the voltage down. SnapVCC eliminates this additional circuit by putting the regulator right on top of the 9V battery. Also, since snapVCC uses a buck converter, it's more efficient than using a linear regulator. snapVCC is an Open Source hardware project. All design files for this project can be found on the electronut GitHub repository. snapVCC uses a buck converter for efficient regulation of battery voltage. snapVCC has an LED power indicator, reverse polarity protection, and you can switch between 3.3V and 5V by just switching a jumper.

Specifications

Texas Instruments TPS560200 buck converter with 500 mA output current

3.3 V / 5 V output, switchable via jumper

P-MOSFET for reverse polarity protection

Power indicator low power LED

Tiny form factor, sits on top of a 9V battery

Power headers are standard .1" pitch

FROM
9 EUR



Accessories

Storage, powerbanks, batteries, chargers, GPS



Li-Po batteries You will need battery power

This battery is really the latest state of the art technology in rechargeable. It is extremely thin, light weight and super thin compared to any rechargeable chemistry. Low weight, small size but huge capacity. The other advantage of the Lithium Polymer technology is the very low self-discharge technology. There are many models offering different capacity, depending on what you'll need in autonomy and size. There are different connectors in this batteries:

https://www.banggood.com/2PCS-DIY-Micro-2_0-Male-Female-Connector-Plug-Cable-For-Eachine-E010-E010C-LIPO-Battery-p-1166427.html

https://www.banggood.com/DIY-1_25mm-2-Pin-Micro-Male-Female-Connector-Plug-Cable-for-RC-LIPO-Battery-FPV-Drone-Quadcopter-p-1080391.html

Specifications

| | |
|------------------|---|
| Voltage: | DC 3.7V |
| Capacity: | 2500mAh |
| Package Content: | Lithium Polymer Battery |
| Material: | Lithium Polymer |
| Net Weight: | 48g |
| Connector Type: | 2P 2mm Pitch |
| Cable Length: | 5cm / 2" |
| Size (L*W*T): | 73 x 55 x 4.8mm / 2.87" x 2.17" x 0.19" |
| Discharge Rate: | 1C |

FROM
8 EUR

amazon



Accessories

Storage, powerbanks, batteries, chargers, GPS



SanDisk SSD USB disk Small sized SSD with high capacity

The SanDisk Extreme Portable SSD is built to weather a variety of conditions with water, dust and drop-resistance. It is rated IP55 and is certified to withstand 2-meter drops. With up to 2TB of high-speed storage for high-res photos, videos and sound files, the SanDisk Extreme Portable SSD is perfect for all your creative pursuits. With high-speed transfers of up to 550MB/s, the SanDisk Extreme Portable SSD lets you offload files in a snap. Designed to work with both Windows and Mac, the SanDisk Extreme Portable SSD is equipped with a USB 3.1 Type-C connector and includes a USB Type-C to Type-C cable and a Type-C to Type-A adapter.

Specifications

| | |
|-----------------------|-----------------------------------|
| Connectivity: | USB |
| Standards | USB 2.0 / 3.0 |
| Connectors: | USB-A to USB-C and USB-C to USB-C |
| Sizes: | 250GB, 500GB, 1TB, 2TB |
| Weight: | 39 grams – 140 grams |
| High-speed transfers: | up to 550MB/s read speeds |
| Isolation: | IP55 |

FROM
99 EUR

amazon



Accessories

Storage, powerbanks, batteries, chargers, GPS



AES encrypted USB disk Pendrive with numeric keyboard for crypto

Teclast encrypted USB pendrive is available in 32 and 64 GB capacities. It uses USB 2.0 standard, something that would be better to upgrade today. But anycase, I personally think that the bottleneck would be the encryption engine. It does not permit very simple passwords as "123456", "111111", etc. If somebody tries to bruteforce it using the included keyboard, after 10 tries it will automatically erase all the contents. Since many of these products have demonstrated to be insecure during the last many years, I cannot warranty that this is a serious product but it will help for low security applications. There was a similar model some years ago that was very easy to hack because the encryption was just to access the storage device, but the internal flash memory chip wasn't encrypted and could be read extracting it and inserting it into a new board.

Specifications

| | |
|---------------|-------------|
| Connectivity: | USB 2.0 |
| Capacity: | 32 or 64 GB |
| Encryption: | AES 256 |
| Read speed: | 6 to 13M /s |

FROM
34 EUR

AliExpress



Accessories

Storage, powerbanks, batteries, chargers, GPS



SanDisk Extreme Plus 32 GB High performance and quality microSD

Get extreme speeds for fast transfer, app performance, and 4K UHD for your Android based smartphone. SanDisk Extreme cards are built tough for extreme durability even under challenging environmental conditions. Fast speeds reduce the time you're on hold while your pictures and videos move to your card or from your card to your computer. Storage capacities from 32GB to 256GB expand device memory and leave room to record video that's ready for the new 4K UHD television screens and monitors.

Specifications

| | |
|---------------|-------------------------------------|
| Storage size: | 32 GB |
| Dimensions: | 0.1 x 1.5 x 1.09 cm |
| Weight: | 5 grams |
| Write speed: | 100 MB per second |
| Read speed: | 60 MB per second |
| Accessories: | microSD to SD card adapter included |

FROM
12 EUR


BEGINNER'S
CHOICE

amazon



Accessories

Storage, powerbanks, batteries, chargers, GPS

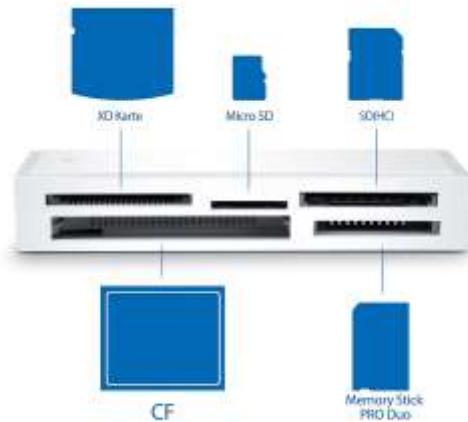

CSL-USB 3.0 Multicard reader Reads quite all storage card types

High data transmission speeds of up to 5 GB/s are possible with the USB 3.0 Super speed card reader from CSL. Transfer HD videos, music, photos and data easily between USB devices and your computer or notebook at 10 times the speed compared to USB 2.0 (480 Mbit/s). In addition, several memory cards can be read simultaneously during operation. The card reader supports the following memory card formats: XD-memory # MS/MS PRO Duo # microSD # microSDHC # microSDXC # SD # SDHC # SDXC # CF # SD/ MicroSD class 10/ UHS-1. The device is also downward compatible with the obsolete USB 2.0 standard. Thanks to the ultra-compact dimensions (41 x 85 x 15 mm) and a low weight of only 30 g, the multifunctional card reader is also perfectly suited to be carried along in the laptop bag. Power is supplied directly via the USB port.

Specifications

Supported card types: XD-memory, MS/MS PRO Duo, microSD, microSDHC, microSDXC, SD, SDHC, SDXC, CF

Operating system compatibility: Microsoft Windows 10, Microsoft Windows 8.1 (32/64bit), Windows 8 (32/64bit), Windows 7 (32/64bit), Windows XP (32/64bit), Linux and Mac OS

Cable length: 60cm

Dimensions: 4.1cm x 8.5cm x 1.5cm (LxWxH)

Weight: 30 g (device only)

Colour: White

FROM
12 EUR

amazon



Accessories

Storage, powerbanks, batteries, chargers, GPS



Agptek USB3 - IDE/SATA converter Reads all IDE and SATA hard disk types

As it supports 2.5" and 3.5" sizes IDE/SATA/SSD hard drive disks and, you can get all your drives active with this compact device. The three included ports enable to transfer data to all three hard drive disks simultaneously or among the 3 drives. And thanks to its USB 3.0 interface transfer speeds reach up to 5 Gbps. It permits duplicating, copying, backup'ing or transferring large amounts of data. An on/off Switch design for HDD protection, it's easy and convenient to use or switch it off. It's also very useful for forensic use.

Specifications

| | |
|---------------------------|--|
| Output interface: | USB 3.0 up to 5GBps Compatible with USB 2.0/1.1 |
| Max. HDD capacity: | 2 TB |
| Supported formats: | 2.5"/3.5" IDE/SATA mechanical or SSD hard drive 5.25" CD/DVD drives |
| DC input: | Include 12V 2A Power Adapter |
| Support: | Plug and play, support hot swap, no drivers |
| Compatibility: | Windows XP / Vista / 7 / 8 /8.1/10 and Mac OS 10.1 and above, Linux |
| Material: | IDE/SATA |
| Note: | Only Support SATA M.2 key B / B+M SSD, does not support SATA SSD M.2 key M does NOT support any PCIe based SSD (NVMe and AHCI) |

FROM
24 EUR

amazon



Accessories

Storage, powerbanks, batteries, chargers, GPS



M.2 NVME to USB Adapter M-Key NVME to USB 3.1 IO Gbps with case

M.2 NVME to USB adapter Card, which is not cable needed. You can use it to clone a NVME SSD to another SSD. If you use it without case it will be more effective in heat dissipation, what realizes SSD's full potential of its high performance. Support Samsung 950Pro/ 960Evo/ 970 Evo/ 970 Pro/ PM951/ PM961/ SM951/ SM961 and other M.2 SSDs with PCI-E (M-KEY) Interface Type, which size is 2230 / 2242 / 2260 / 2280. High performance 10Gbps USB3.1 Gen 2 bridge chip, high-speed retrieve and backup data. PLEASE NOTE: the raw SSD from some brand is totally not pre-formatted in any way so PC cannot recognize it, you have to go through Windows Disk Manager to make SSD identifiable as a volume. Then the adapter works great.

Specifications

| | |
|-----------------------------|--|
| M.2 sizes supported: | 22*30mm (2230), 22*42mm (2242), 22*60mm (2260), 22*80mm (2280) |
| Chipset: | Jmicron JMS583 |
| Interface type: | M.2 NVME to USB 3.1 SS 10Gbps USB3.1 |
| Support: | Plug and play, support hot swap, no drivers |
| Compatibility: | Windows XP / Vista / 7 / 8 / 8.1/10 and Mac OS 10.1 and above, Linux |
| Material: | PCB & alluminium case |
| Note: | Only Support SSD M.2 key M |
| Connector: | Type-C |

FROM
18 EUR

AliExpress




Accessories

Storage, powerbanks, batteries, chargers, GPS



Perfectly Fit SATA M.2 SSD Key B Key B+M
Size 2230 2242 2260 2280

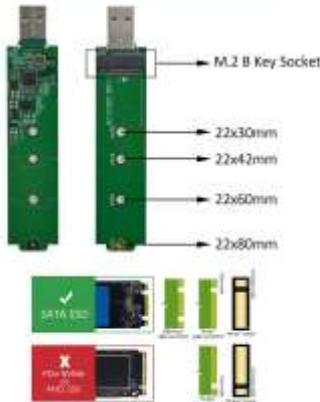

Advitis USB3 UASP-SATA NGFF M.2 type SATA SSD reader

Many actual computers, specially the compact ones include a new SSD hard disk type which uses the new M.2 device format. This kind of SSD disks are available in different sizes (2230, 2242, 2260 and 2280) which are related to the width and length. But also, the connector pins are available in different formats (key B, key M and key B+M) which are related to the number and position of the pins. The final interface type can also be SATA or PCIe. This adapter permits connecting the SATA type SSD cards to an USB 3.0/2.0 port, in order to be able to read, write copy or clone the hard disk data to another device. When upgrading your laptop's hard disk to a bigger one, you'll need it. It's also very useful for forensic use.

Specifications

M.2 sizes supported: 22*30mm (2230), 22*42mm (2242), 22*60mm (2260), 22*80mm (2280)

Interface type: M.2 NGFF SATA SSD to USB 3.0 SS

Support: Plug and play, support hot swap, no drivers

Compatibility: Windows XP / Vista / 7 / 8 / 8.1/10 and Mac OS 10.1 and above, Linux

Material: aluminum

Note: Only Support SATA M.2 key B / B+M SSD,

does not support SATA SSD M.2 key M

does NOT support any PCIe based SSD (NVMe and AHCI)

FROM
14 EUR

amazon



Accessories

Storage, powerbanks, batteries, chargers, GPS



Mic-Lock device Blocks microphone on many devices

When hackers, companies, or governments gain remote access control of your laptop, tablet or smartphone, they're able to turn on the webcam—an action that causes the microphone to go live, too. While being watched is bad enough, being recorded without your permission is even worse. Are you sure your conversations are private?

Be sure with Mic-Lock, the only digital anti-spying sound blocker on the market! Mic-Lock is the first and only device to offer unbeatable protection against hackers and spies attempting to listen in on you.

Specifications

KEEP CONVERSATIONS PRIVATE! Mic-Lock secures your device's microphone input with proprietary semiconductor comes with a lifetime guarantee.

PREVENTS CYBER ATTACKERS from using your microphone to listen in on you.

THE ONLY ANTI-SPYING sound blocker on the market.

COMPACT DESIGN with keychain attachment is portable for work and travel. Use with our webcam cover for complete audio and visual protection.

SIMPLY PLUG into your laptop, phone or tablet and you're ready to go!

FROM
6 EUR


BEGINNER'S
CHOICE

amazon



Accessories

Storage, powerbanks, batteries, chargers, GPS

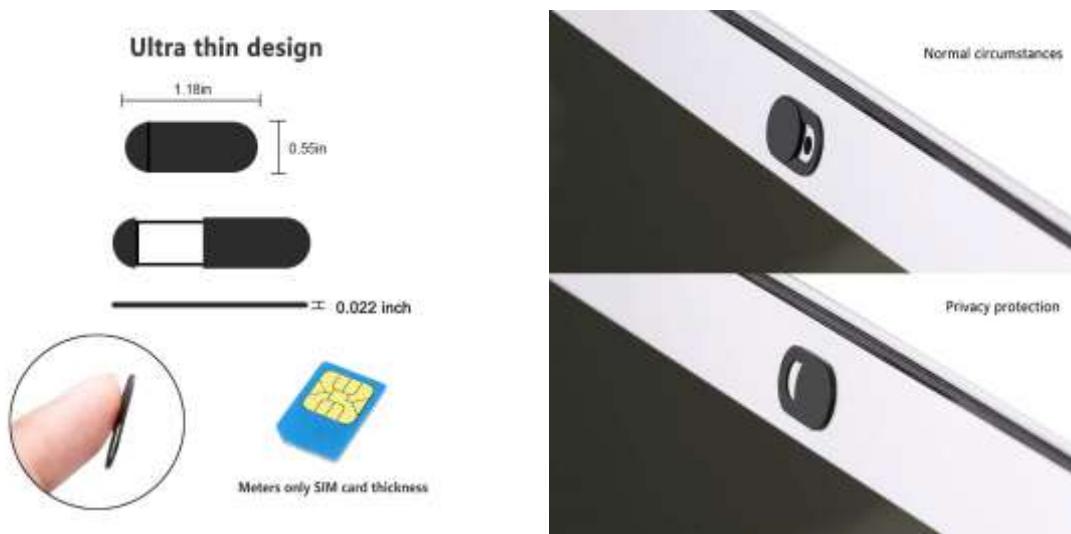

Ultra-thin webcam cover Protect your privacy from the RATs

This webcam cover Only 0.07 inches in thickness which will not interfere with closing lid of your laptop. It adheres with double sided tape and can be removed if needed. BSTCAM webcam cover can be opened or closed with just simple movement. The adhesive can be easily applied and removed from the device without any traces. Webcam cover ensures your privacy behind the Len of your device. Slide the webcam cover open when needed and while it also blocks potential hackers. In addition, closing your laptop is no problem due to the ultra thin design. BSTCAM 2 version webcam cover is compatible with most smartphones, MacBook, MacBook Pro, laptops, tablets and all-in-one desktops. One set come with 6 pieces, meet your everyday need.

Specifications

ONLY 0.027in THIN

Quality Strong 3M adhesive

Hole measures 4.6mm wide

Measures 0.47in long, 0.27in wide and 0.027in high

Made of Nickel plated slider

FROM
7 EUR

BEGINNER'S
CHOICE

amazon



Accessories

Storage, powerbanks, batteries, chargers, GPS



BUBM 3x Accessories Bags Gadget Travel Case Electronics Organiser

Three varying sizes bags made of durable splash proof nylon, with high quality double zips and each bag has its own carry handle for easier transportation. All cases have a netted zip pocket for holding portable powerbank, hard drive, charger cords, usb flash disk, passport, etc to keep them closed and secure. Each gadget bag comes with removable dividers allowing flexible positioning to separate your items to suit your needs. Meanwhile, it comes with 5 brightly coloured cable ties to keep the contents neatly organised and prevent the tangle.

Made of splash proof nylon helps to keep out water and prevent large water permeation

2 sturdy zipper pullers help to easy access the things you put (only the large size bag)

Removable dividers allowing flexible positioning and separate items to make it organised

Carry handle makes it portable to carry around for travel, business trip or any occasion

Keep every gadgets you need organized, make it tidy, you have everything right at hand

Specifications

Color : Black

External Material : High quality, durable nylon

Large Size: (27x 19.5x 7.5cm)

Middium Size: (23x 16x 5.7cm)

Small Size: (19.5x 12.5x 5cm)

Material: splash proof nylon

Zip: 2 sturdy zipper pullers

FROM
25 EUR


**BEGINNER'S
CHOICE**

amazon



Accessories

Storage, powerbanks, batteries, chargers, GPS

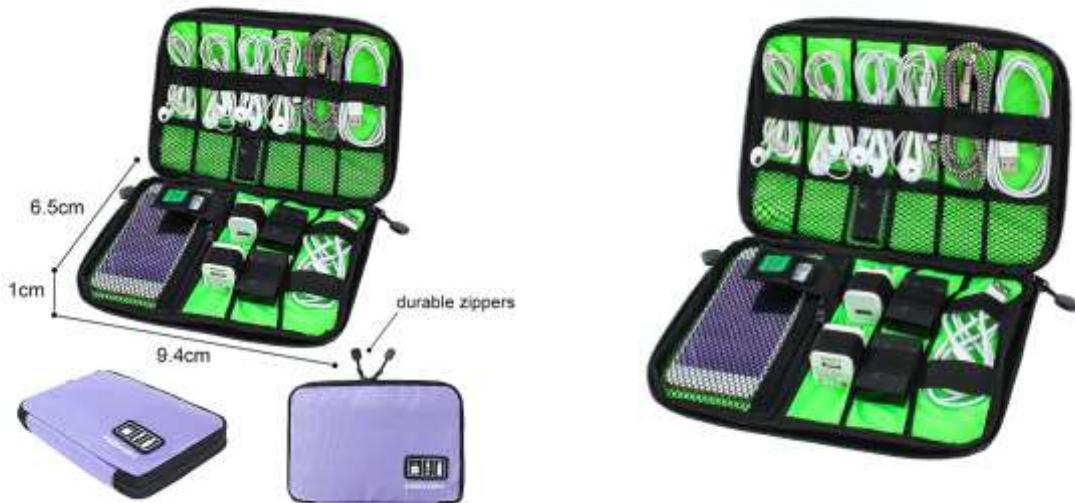

Cable organizer Travel Bag Keep your gadgets & cables organized

Compact and lightweight bag for all your small gadgets and cables. It doesn't take up much space in your luggage. It's small enough to stay in your carry-on luggage. Especially for people who do a lot of traveling for business or pleasure. 9 elastic segments on both sides in the middle of the pack that prevent the disorderly placement of products. Also have mesh storage and SD card pouch, any small electronic accessories can be protected.

Specifications

Colors : Brown, Blue, Purple-1, Purple-2

External Material : Waterproof nylon

Weight: 4.2 ounces

Size: 9.4" x 6.5" x 1"

Space: 9 elastic segments to hold your charging cables or other small items
mesh storage that can fit thumb drives and adapters
SD card pouch
Zip.

FROM
6 EUR

BEGINNER'S
CHOICE

amazon



Accessories

Storage, powerbanks, batteries, chargers, GPS



Lockpicking training kit Real hackers know lockpicking

No, picking a lock isn't just for criminals looking to make off with your flat screen TV. On the opposite, it's a very useful skill to have; just ask Jason Bourne, James Bond or any secret agent that ever needed to get into a room quickly and discretely. While you may not be a super spy trying to fill out your spy kit, the Lock Cowboy 20-Piece Lock Pick Set with amenities will give you all the tools, training and knowledge you need to unlock yourself out of a jam. Lock picking seems like it would be a challenge, right? Well, luckily for you, our lock pick set is so versatile and comprehensive that we've given you everything you need to start and continue. From lock picking tools to a transparent padlock for training to a lock pick set for your wallet, we've got you covered. Godpick visible crystal cutaway practice lock allows you can see clearly how the pins work when a key is inserted, this help you understand the mechanism of the locks, very helpful for Locksmith training and lock practice. So whether you're looking to impress your friends, need a way to keep you from locking yourself out of the house again or you just want to add to your locksmith set, choose Lock Cowboy, and you'll never need another lock pick set again.

Specifications

15-Piece Lock Pick Set with Leather Case

5-Piece James Bond Credit Card Wallet-Size Lock Picking Kit

Transparent Cutaway Padlock with Keys and a Case

Beginner's Quick Start e-Guide with 2 Video Illustrations

Advanced MIT Guide to Lock Picking

FROM
15 EUR


BEGINNER'S
CHOICE

amazon



Accessories

Storage, powerbanks, batteries, chargers, GPS

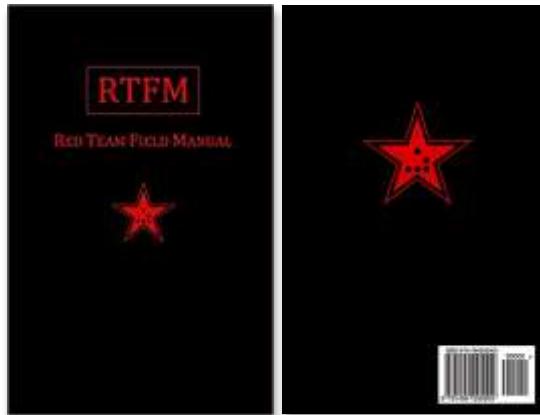

RTFM READ THE FUCKING MANUAL

No, RTFM doesn't really mean that. The real meaning is "Red Team Field Manual", and it's one of the most useful books you can carry inside your hacker's bag. The Red Team Field Manual (RTFM) is a no fluff, but thorough reference guide for serious Red Team members who routinely find themselves on a mission without Google or the time to scan through a man page. The RTFM contains the basic syntax for commonly used Linux and Windows command line tools, but it also encapsulates unique use cases for powerful tools such as Python and Windows PowerShell.

The RTFM will repeatedly save you time looking up the hard to remember Windows nuances such as Windows wmic and dsquery command line tools, key registry values, scheduled tasks syntax, startup locations and Windows scripting. More importantly, it should teach you some new red team techniques.

Specifications

Author: Ben Clark

Publisher: CreateSpace Independent Publishing Platform; 1.0 edition (11 Feb. 2014)

Format: Paperback

Pages: 96 pages

Product Dimensions: 14 x 0.6 x 21.6 cm

Language: English

ISBN-10: 1494295504


FROM
5 EUR

amazon



Accessories

Storage, powerbanks, batteries, chargers, GPS

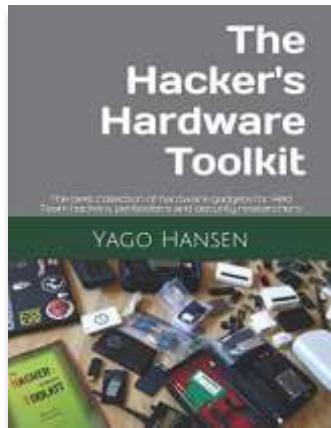

The Hacker's Hardware Toolkit

The best collection of hardware gadgets for Red Team hackers, pentesters and security researchers

This book is available for free in yadox666 github account but many people asked for a printed version. I decided to publish it in Amazon and to keep the price as low as possible. So, if you downloaded it in Github and want to have your own printed copy, just visit your local Amazon market and search it there. Enjoy it.

Specifications

Author: Yago Hansen

Publisher: Independently published (May 20, 2019)

Format: Paperback and digital

Pages: 138 pages

Product Dimensions: 8.5 x 0.3 x 11 inches

Language: English

ISBN-10: 1099209463

FROM
9.5 EUR


**BEGINNER'S
CHOICE**

amazon



Accessories

Storage, powerbanks, batteries, chargers, GPS

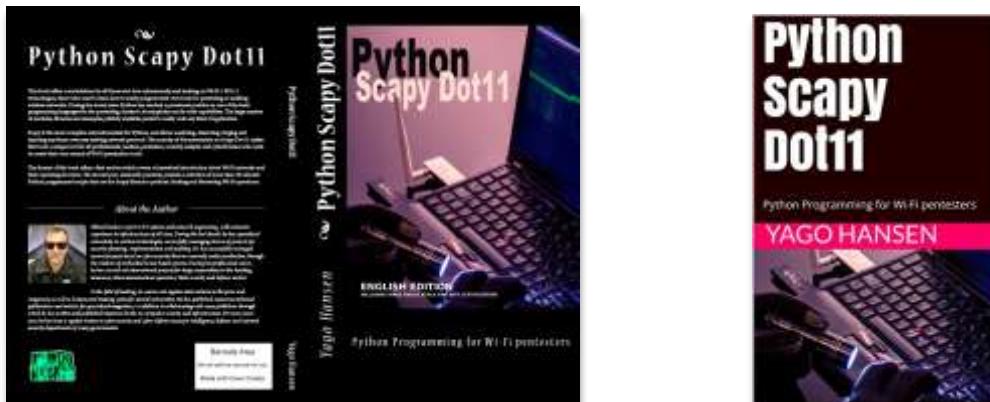

Python Scapy Dot11 Python for Wi-Fi pentesters

Since this is hardware catalogue, it's not the best place for including a book like this, but... I will do it for some reasons: the first one is that I wrote it ;-) and I want to publicize it. The second reason is that I have used the Scapy capacities in many network attacks inside of some of the included Network hacking tools (routers). This book offers a real solution for all those who love cybersecurity and hacking on Wi-Fi / 802.11 technologies, those who want to learn how to easily program their own tools for pen testing or auditing wireless networks. During the recent years Python has reached a prominent position as one of the bests programming languages for the pen testing, thanks to its simplicity and its wide capabilities. The large number of modules, libraries and examples publicly available permit to easily code any kind of application. Scapy is the most complete network module for Python, and allows analysing, dissecting, forging and injecting any frame over any existing network protocol. The scarcity of documentation on Scapy Dot11 makes this book a unique tool for all professionals, hackers, pentesters, security analysts and cyberforensics who wish to create their own arsenal of Wi-Fi penetration tools. The format of this book offers a first section which covers a theoretical introduction about Wi-Fi networks and their operating structure. The second part, eminently practical, presents a selection of more than 40 selected Python programmed scripts that use the Scapy library to perform Hacking and Pen testing Wi-Fi operations.

Specifications

Author: Yago Hansen

Publisher: Createspace Independent Pub; Edición: 1 (4 de febrero de 2017)

Format: Paperback and digital

Pages: 212 pages

Product Dimensions: 14 x 0.6 x 21.6 cm

Language: English & Spanish

ISBN-10: 1542748704

FROM
19 EUR

amazon

