


System ⑤ 1040 QwikLOK

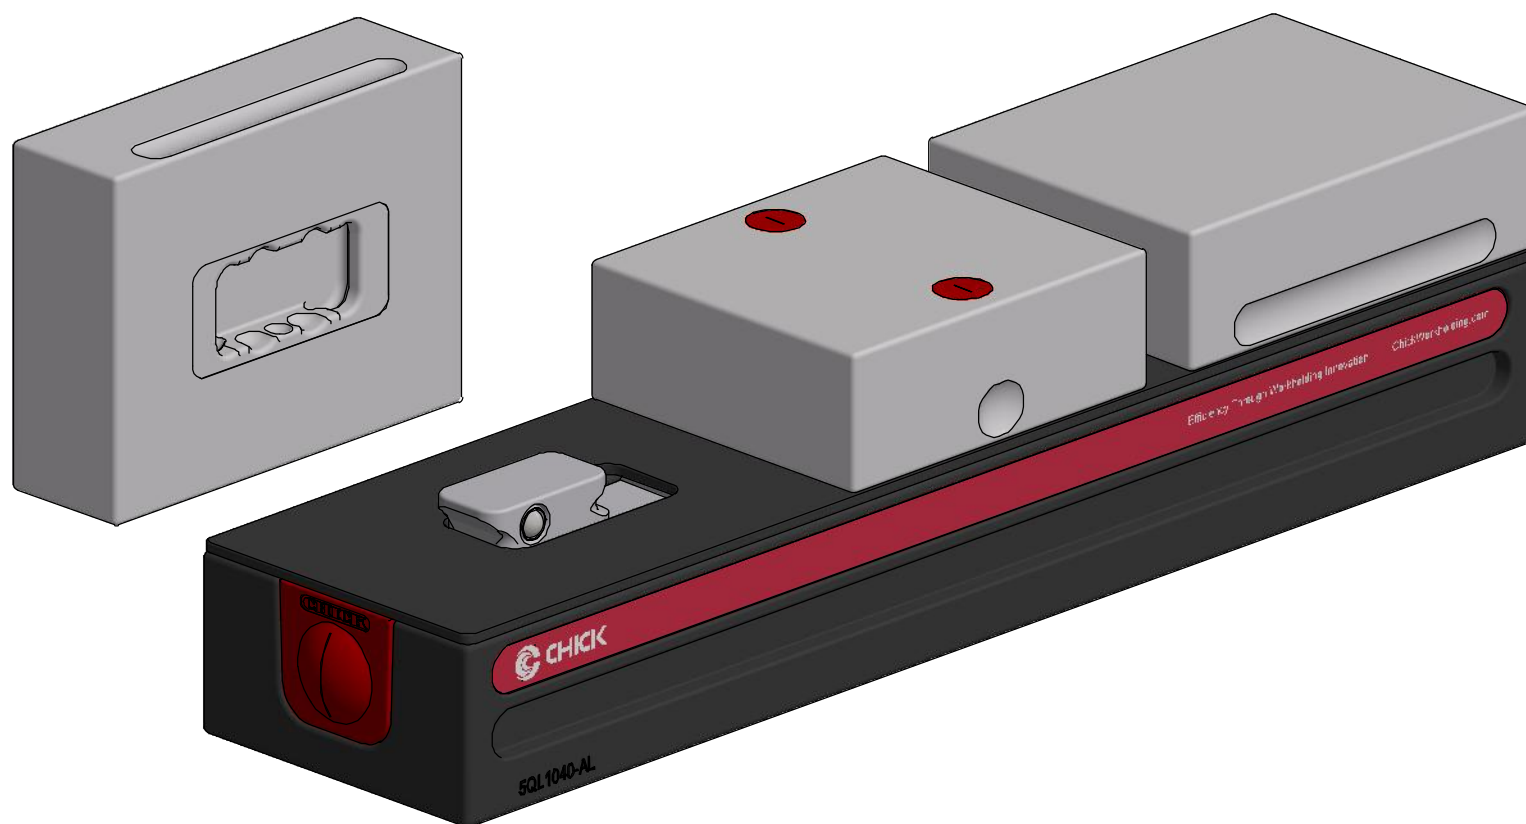

The QwikLOK is ideally suited for batch production when machining on a single or opposing sides.

System (QwikLOK) Weight: 11 kg [24 lb]

Shipping Weight: 12.7 kg [28 lb]

Contact us:


ChickWorkholding.com
724.772.1644

800-9004

REV
E

⑤ 1040
QwikLOK

5QL1040-AL: Page 1 of 19

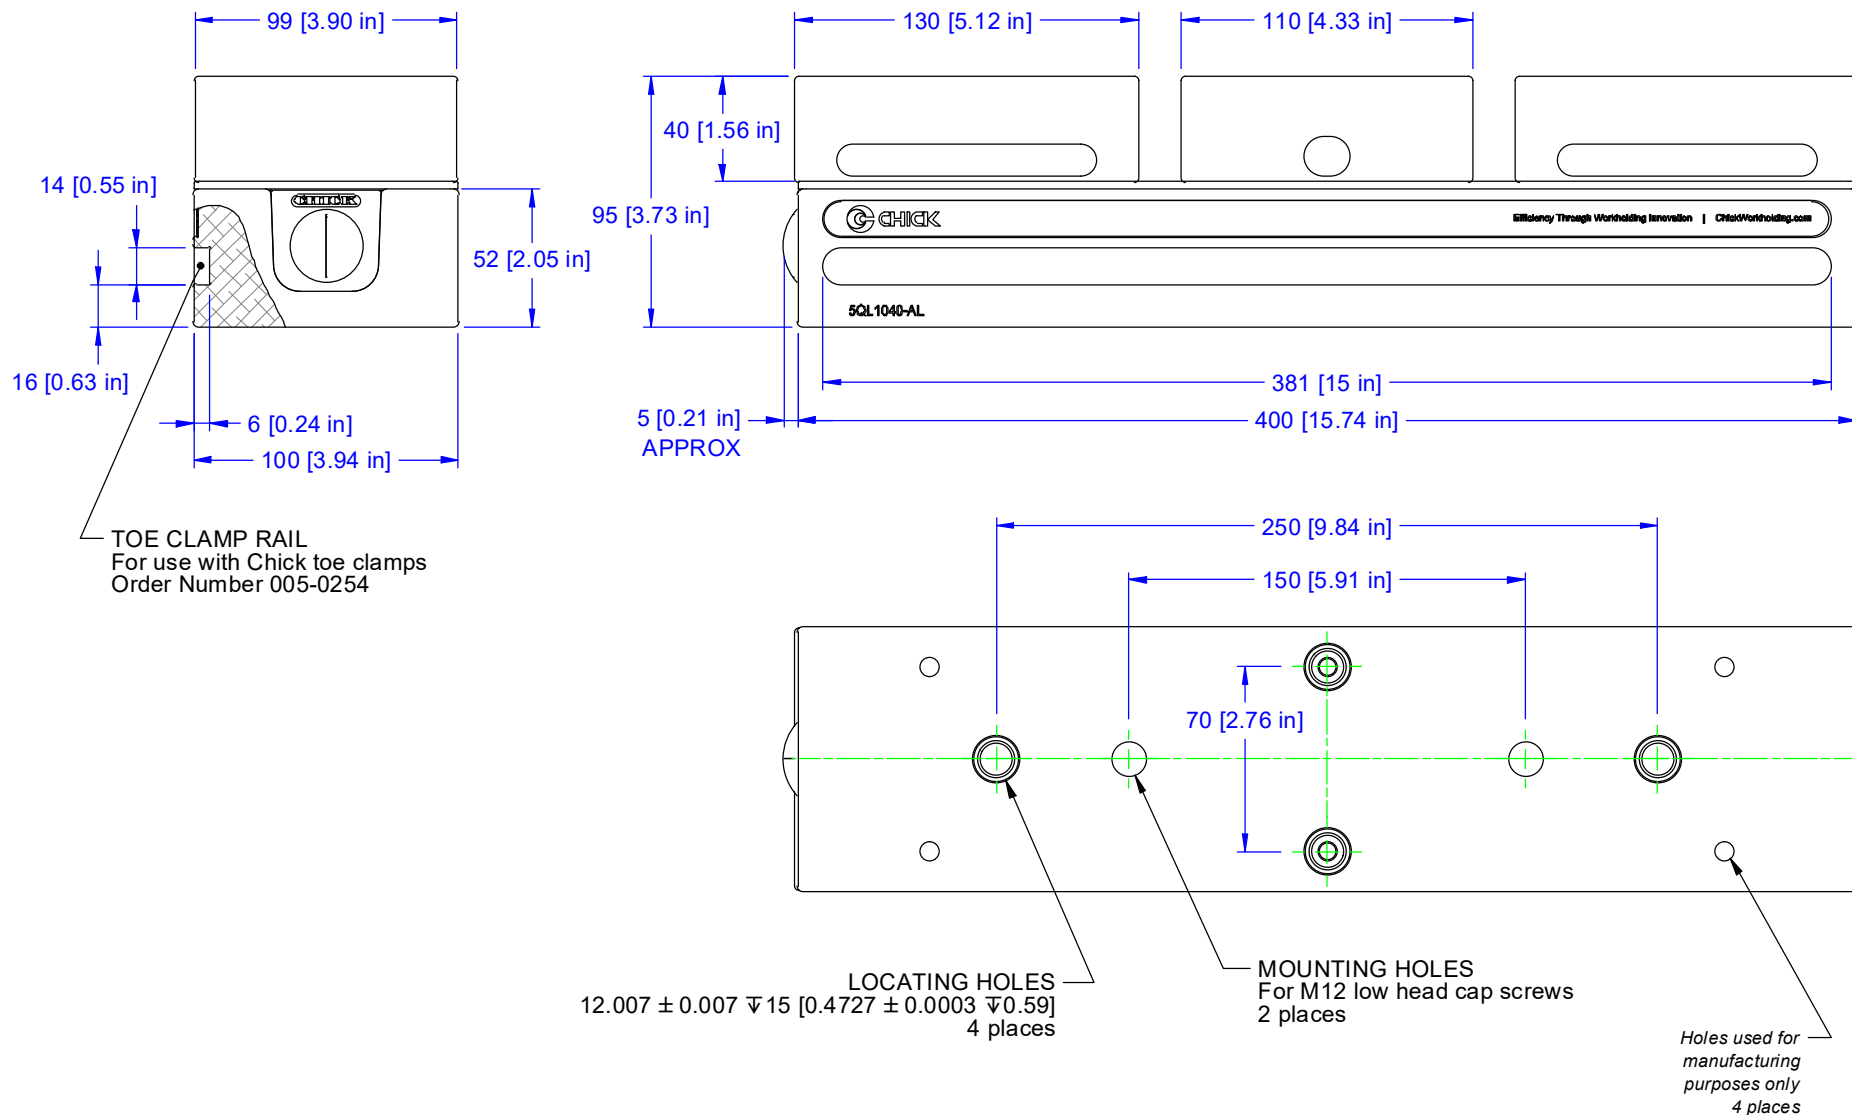

Dimensions are mm [in] and are based on a standard dual station machinable jaw set. Jaws shown fully open. See Travel / Holding Capacity for more information.


Contact us:
ChickWorkholding.com
724.772.1644

800-9004

REV
E

⑤ 1040
QwikLOK

5QL1040-AL: Page 2 of 19

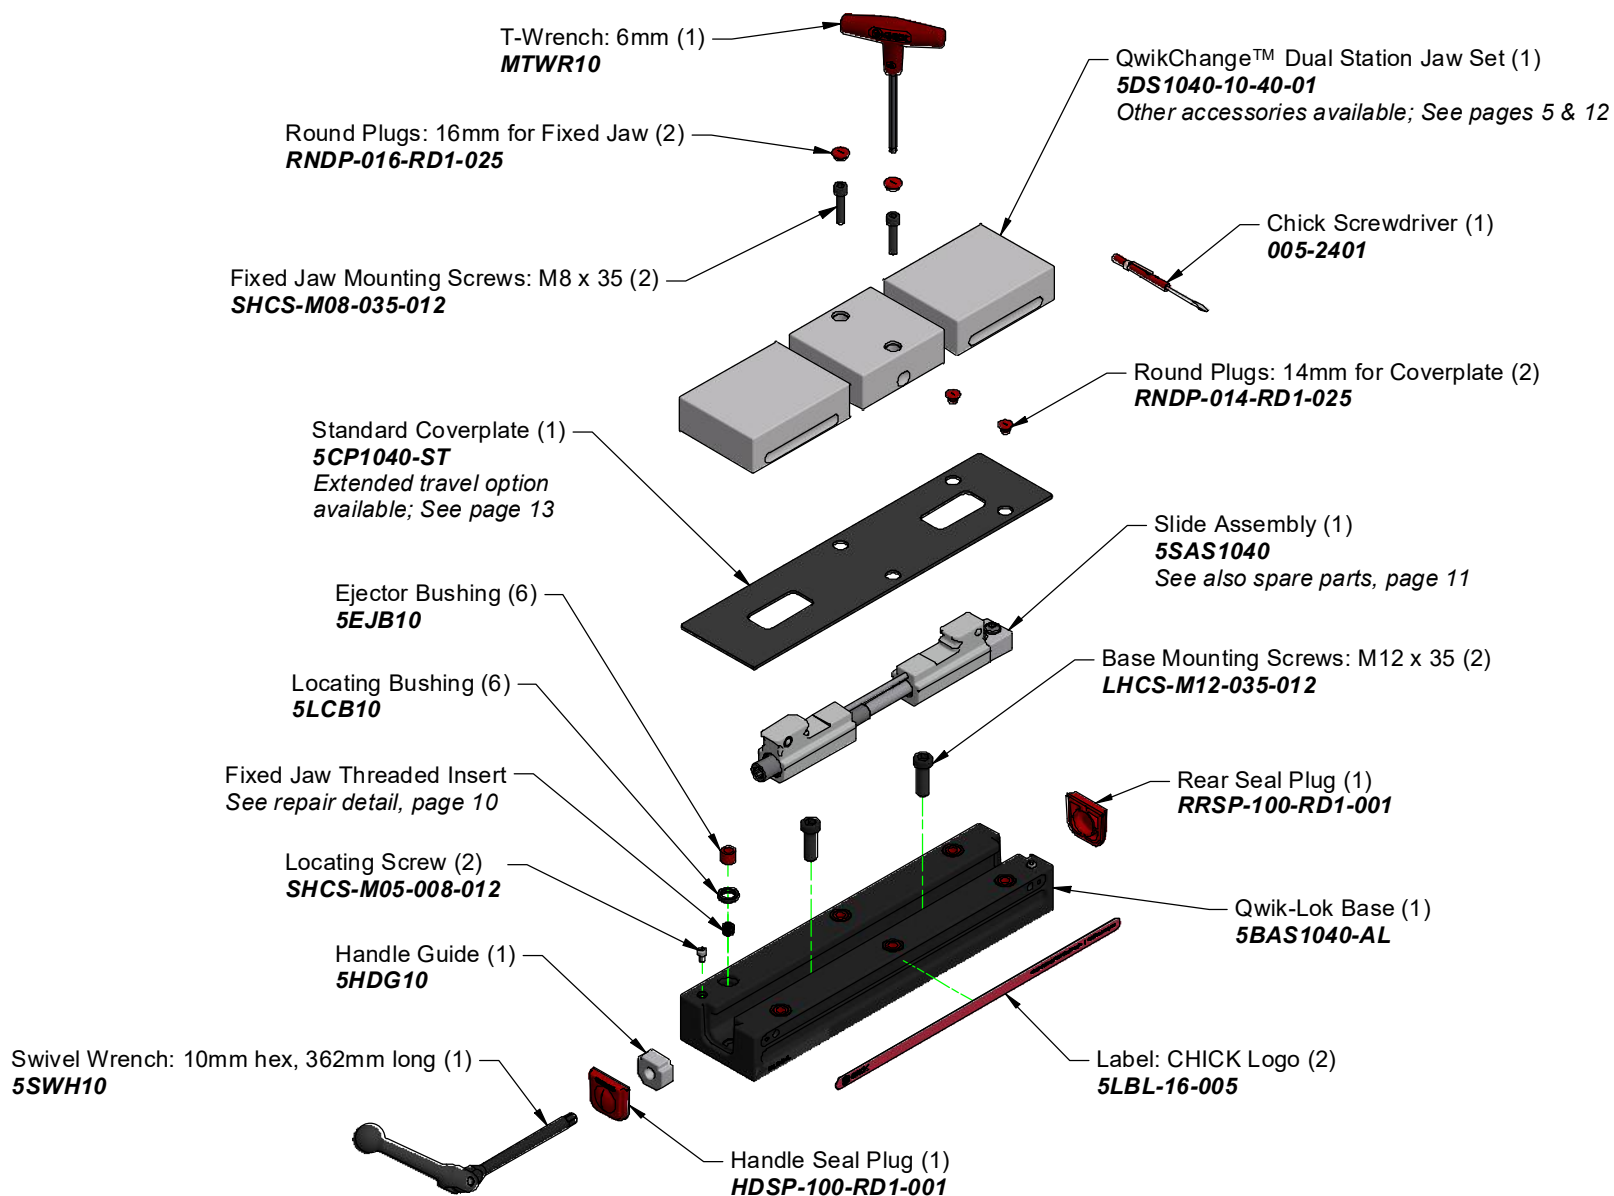

A standard QwikChange™ dual station jaw set is included. For additional accessories, see the "Order Information" section of this Tech Manual, pages 5 & 12.

Contact us:
ChickWorkholding.com
724.772.1644


800-9004

REV
E


⑤ 1040
QwikLOK

5QL1040-AL: Page 3 of 19


Dual Station Machinable Jaw Sets

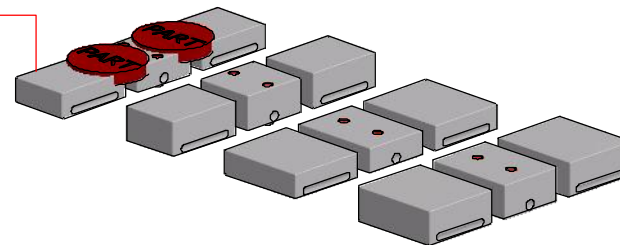


Single Station Machinable Jaw Sets

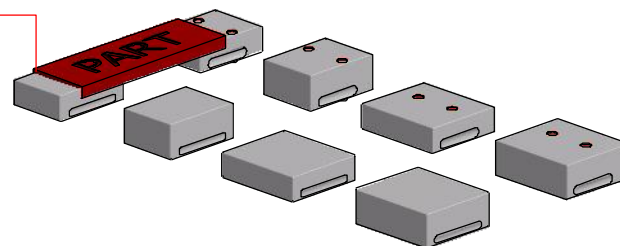


Versatility
Comes
Standard

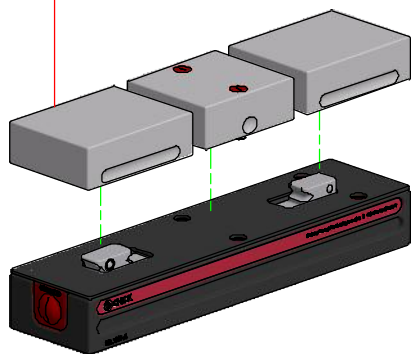

Machinable Faceplates

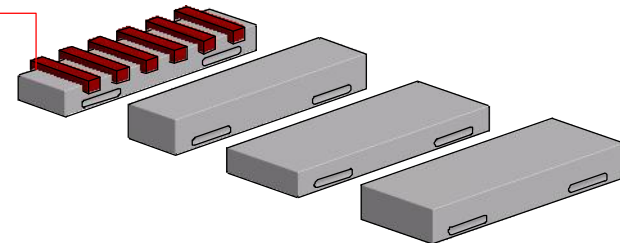

Jaw Carrier Sets & Jaw Plates

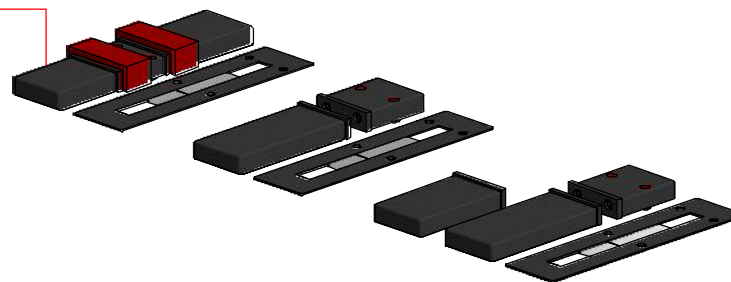









Contact us:
ChickWorkholding.com
724.772.1644

800-9004

REV
E

⑤ 1040
QwikLOK

5QL1040-AL: Page 4 of 19

	Standard	High	Wide	Oversize	Max Blanks
					
Dual Station Jaw Set Holds 2 parts ≤180mm (7")  Set includes 2 Movable Jaws 1 Center Fixed Jaw	Jaw Set 5DS1040-10-40-01 A Movable Jaw 5MJ1040-10-40 B Center Fixed Jaw 5FJ1040-10-40	5DS1040-10-55-01 5MJ1040-10-55 5FJ1040-10-55	5DS1040-15-40-01 5MJ1040-15-40 5FJ1040-15-40	5DS1040-15-55-01 5MJ1040-15-55 5FJ1040-15-55	<i>Not sold as a set; See numbers for separate jaws, below.</i> 270-0884 270-0885
Single Station Jaw Set Holds 1 part 140mm (5.5") to 380mm (15")  Set includes 1 Movable Jaw 1 Single Station Fixed Jaw	Jaw Set 5SS1040-10-40-01 A Movable Jaw 5MJ1040-10-40 C Single Station Fixed Jaw 5SJ1040-10-40	5SS1040-10-55-01 5MJ1040-10-55 5SJ1040-10-55	5SS1040-15-40-01 5MJ1040-15-40 5SJ1040-15-40	5SS1040-15-55-01 5MJ1040-15-55 5SJ1040-15-55	<i>Not sold as a set; See numbers for separate jaws, below.</i> 270-0884 270-0886
Faceplate Blank fixture plate 400mm (16") long  Faceplate includes locating pins	5FP1040-10-40-01	5FP1040-10-55-01	5FP1040-15-40-01	5FP1040-15-55-01	<i>Not applicable</i>



Contact us:
 ChickWorkholding.com
 724.772.1644

800-9004




REV
 E

⑤ 1040
QwikLOK

5QL1040-AL: Page 5 of 19

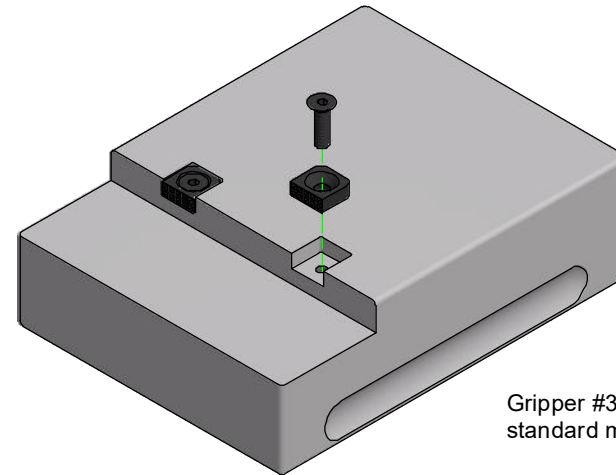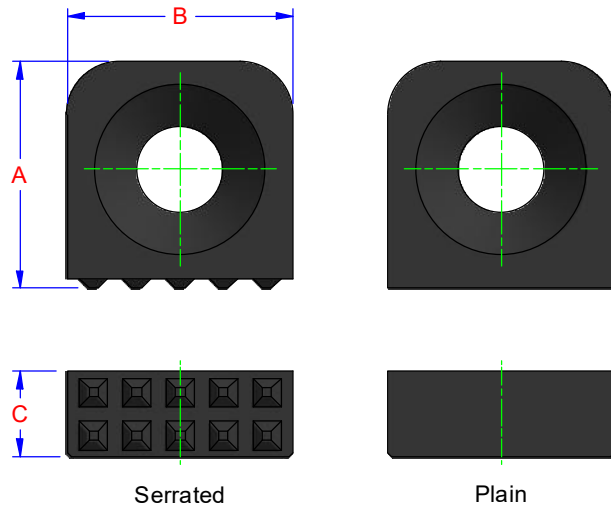

Gripper #3 in 1040
standard movable jaw

	Gripper #3	Gripper #4	Gripper #5	Gripper #6
				
Plain	005-2531	005-2541	005-2551	005-2561
Serrated	005-2532	005-2542	005-2552	005-2562
A	9 [0.35]	12 [0.47]	15 [0.59]	19 [0.75]
B	9 [0.35]	12 [0.47]	15 [0.59]	19 [0.75]
C	3 [0.12]	4.5 [0.18]	5 [0.20]	6 [0.24]

Grippers in table shown actual size.

Dimensions are mm [in].


Contact us:
ChickWorkholding.com
724.772.1644




800-9004

REV
E

⑤ 1040
QwikLOK

5QL1040-AL: Page 6 of 19

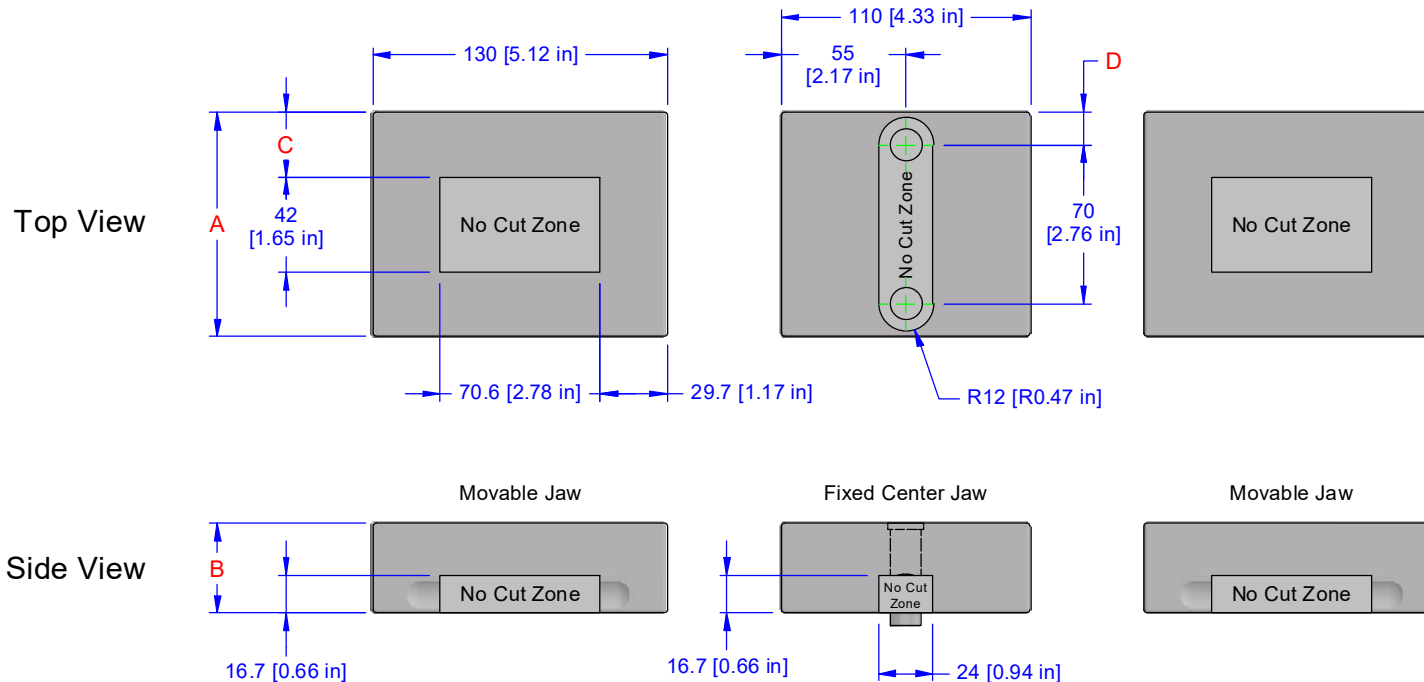

	Standard	High	Wide	Oversize	Max Blanks
					
A	99 [3.90 in]	99 [3.90 in]	148 [5.83 in]	148 [5.83 in]	148 [5.83 in]
B	40 [1.57 in]	55 [2.17 in]	40 [1.57 in]	55 [2.17 in]	90 [3.54 in]
C	28.5 [1.12 in]	28.5 [1.12 in]	53 [2.09 in]	53 [2.09 in]	53 [2.09 in]
D	14.5 [0.57 in]	14.5 [0.57 in]	39 [1.54 in]	39 [1.54 in]	39 [1.54 in]

Dimensions are mm [in].
Dimensions in Top View are centered in the "A" dimension.

Contact us:
ChickWorkholding.com
724.772.1644


800-9004

REV
E


⑤ 1040
QwikLOK


5QL1040-AL: Page 7 of 19

Top View

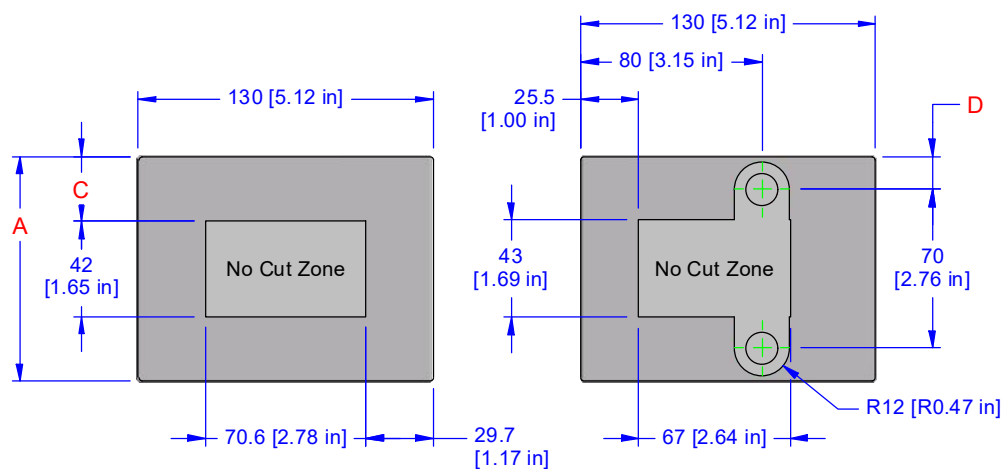

Side View

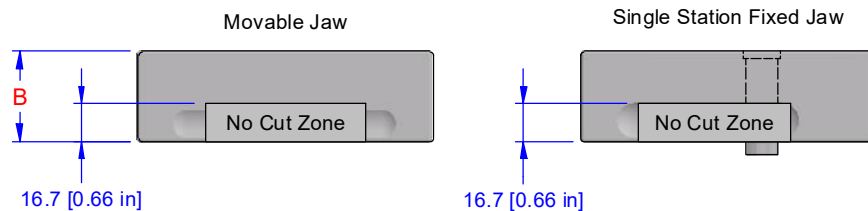

	Standard	High	Wide	Oversize	Max Blanks
					
A	99 [3.90 in]	99 [3.90 in]	148 [5.83 in]	148 [5.83 in]	148 [5.83 in]
B	40 [1.57 in]	55 [2.17 in]	40 [1.57 in]	55 [2.17 in]	90 [3.54 in]
C	28.5 [1.12 in]	28.5 [1.12 in]	53 [2.09 in]	53 [2.09 in]	53 [2.09 in]
D	14.5 [0.57 in]	14.5 [0.57 in]	39 [1.54 in]	39 [1.54 in]	39 [1.54 in]

Dimensions are mm [in].
Dimensions in Top View are centered in the "A" dimension.

Contact us:
ChickWorkholding.com
724.772.1644


800-9004

REV
E

⑤ 1040
QwikLOK

5QL1040-AL: Page 8 of 19

Top View

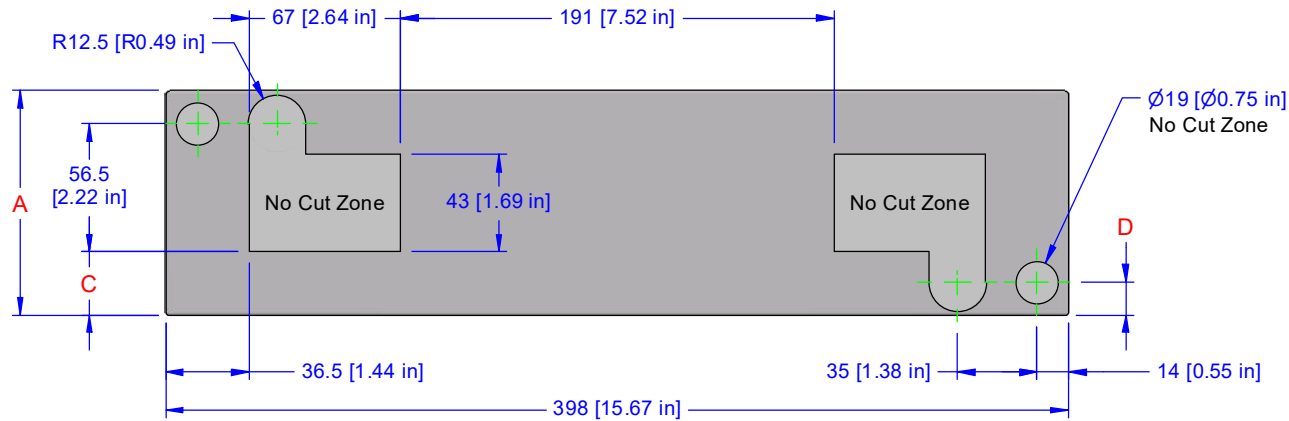

Side View



	Standard	High	Wide	Oversize
				
A	99 [3.90 in]	99 [3.90 in]	149 [5.87 in]	149 [5.87 in]
B	40 [1.57 in]	55 [2.17 in]	40 [1.57 in]	55 [2.17 in]
C	28 [1.1 in]	28 [1.1 in]	53 [2.1 in]	53 [2.1 in]
D	14.5 [0.57 in]	14.5 [0.57 in]	39.5 [1.56 in]	39.5 [1.56 in]

Dimensions are mm [in].



Contact us:
ChickWorkholding.com
724.772.1644

800-9004


REV
E

⑤ 1040
QwikLOK


5QL1040-AL: Page 9 of 19

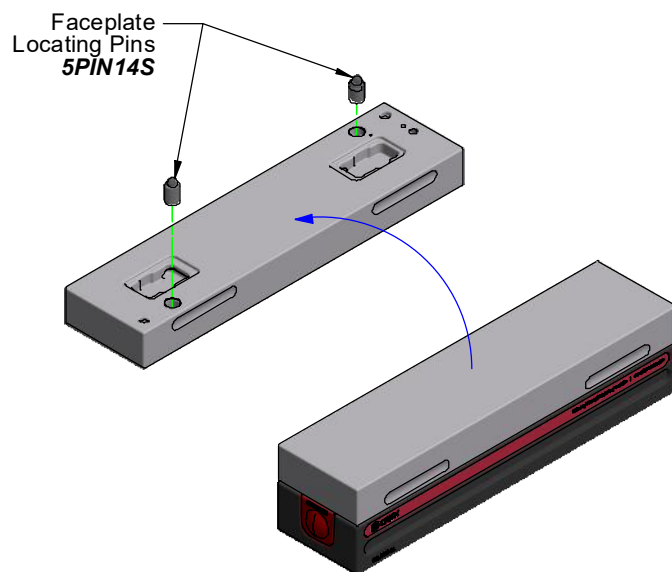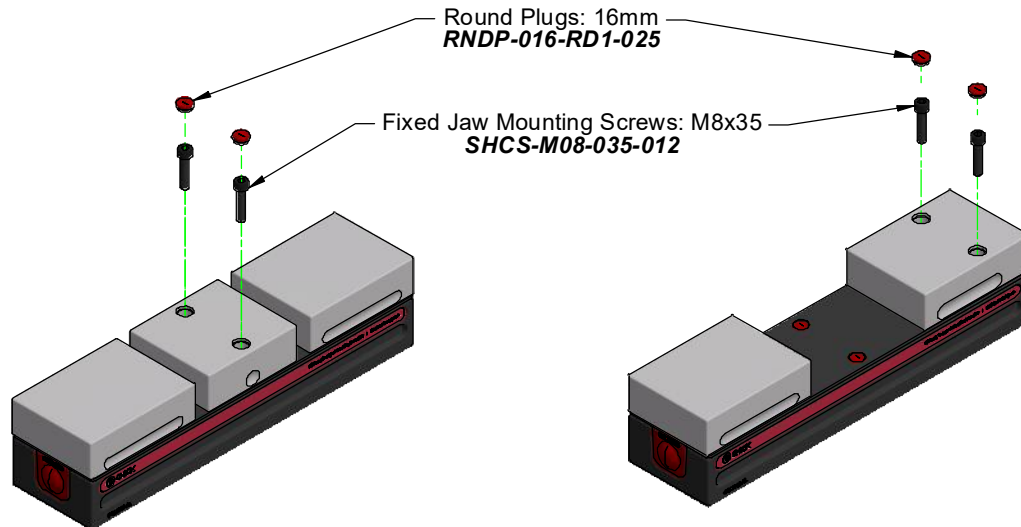

Bottom of Base

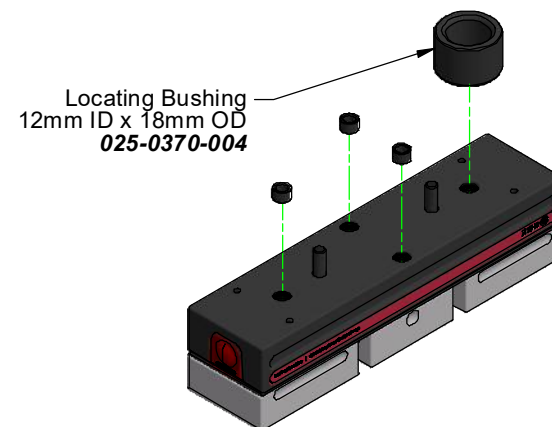

Fixed Jaw Threaded Insert Repair

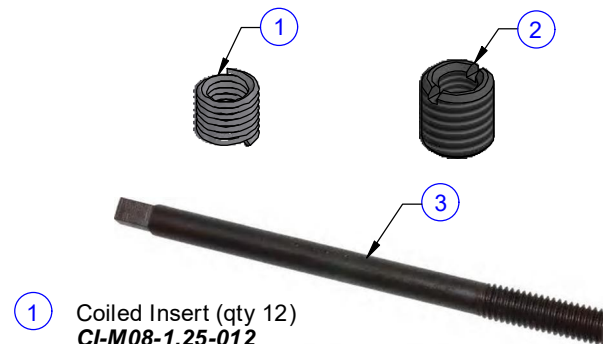

Contact us:
ChickWorkholding.com
724.772.1644


800-9004

REV
E

5 1040
QwikLOK

5QL1040-AL: Page 10 of 19


Complete Slide Assembly
5SAS1040
R-5SAS1040*



Slide Rebuild Kit **5SRK10** (1-3)



Drive Screw
5SCR10
Includes (2) & (3)

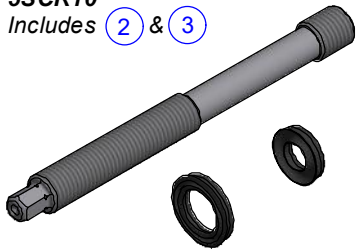

(2) U-Cup Seals - LH Nut
5USL10

(1) Retaining Ring
5RRG10

Hex Coupler
5HXC1040
Includes (1)



Left Hand Slide Nut
5SLN10
Includes (4)

(4) Alignment Rod

Right Hand Slide Nut
5SRN10

Drive Screw
5SCR10
See also inset at left

Third Hand Screw
5THS10

Clamping Block
5CLB10

(3) U-Cup Seals - RH Nut
5USR10

Be sure to refer to the torque clamping force chart on page 17 for maximum torque information.

*Reconditioned slide assemblies are available; Return of an existing slide assembly is required.

Contact us:
ChickWorkholding.com
724.772.1644


800-9004

REV
E


5 1040
QwikLOK

5QL1040-AL: Page 11 of 19


A Dual Station Jaw Carrier Set

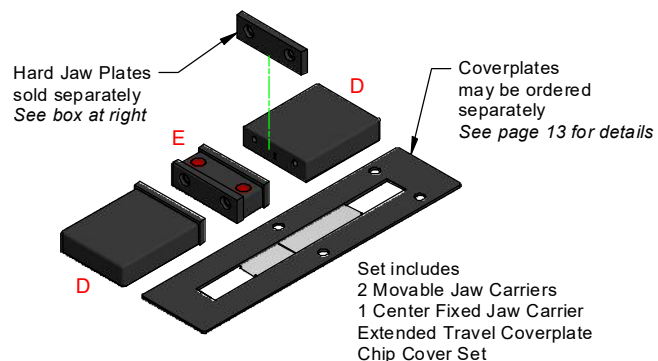

B Single Station Jaw Carrier Set

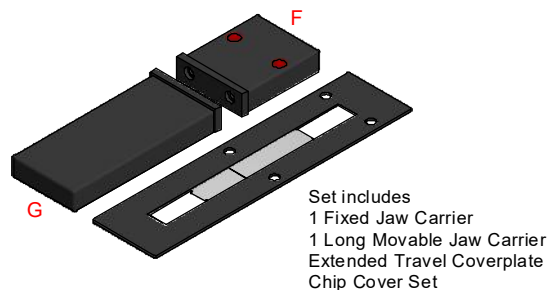

C Deluxe Single Station Jaw Carrier Set

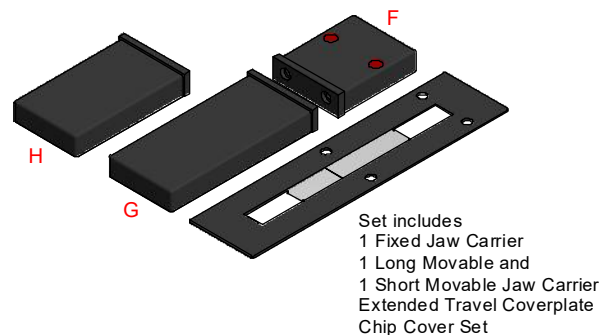

Jaw Carrier Sets

A Dual Station
5JC1040-DS-IN-01
5JC1040-DS-MM-01

B Single Station
5JC1040-SS-IN-01
5JC1040-SS-MM-01

C Deluxe Single Station
5JC1040-XS-IN-01
5JC1040-XS-MM-01

Individual Jaw Carriers

D Dual Station Movable
5JC1040-MC-IN
5JC1040-MC-MM


E Dual Station Fixed
5JC1040-FC-IN
5JC1040-FC-MM

F Single Station Fixed
5JC1040-SC-IN
5JC1040-SC-MM


G Single Station Long Movable
5JC1040-LM-IN
5JC1040-LM-MM

H Single Station Short Movable
5JC1040-SM-IN
5JC1040-SM-MM


Hard Jaw Plates



Standard Hard Jaw Plate - Inch
JH4STD-01
(H1.22", W3.99", T.35") (Set of 4)
Mounting Hardware: **LHCS-375-050-008***



Standard Hard Jaw Plate - Metric
MJH10-01
(H31mm, W101mm, T9mm) (Set of 4)
Mounting Hardware: **LHCS-M08-016-008***



Thick Hard Jaw Plate - Inch Only
JH4THK-01
(H1.22", W3.99", 1.35") (Set of 2)
Mounting Hardware: **SHCS-375-100-012***

*Mounting hardware sold separately


Contact us:
ChickWorkholding.com
724.772.1644

800-9004

REV
E

⑤ 1040
QwikLOK

5QL1040-AL: Page 12 of 19

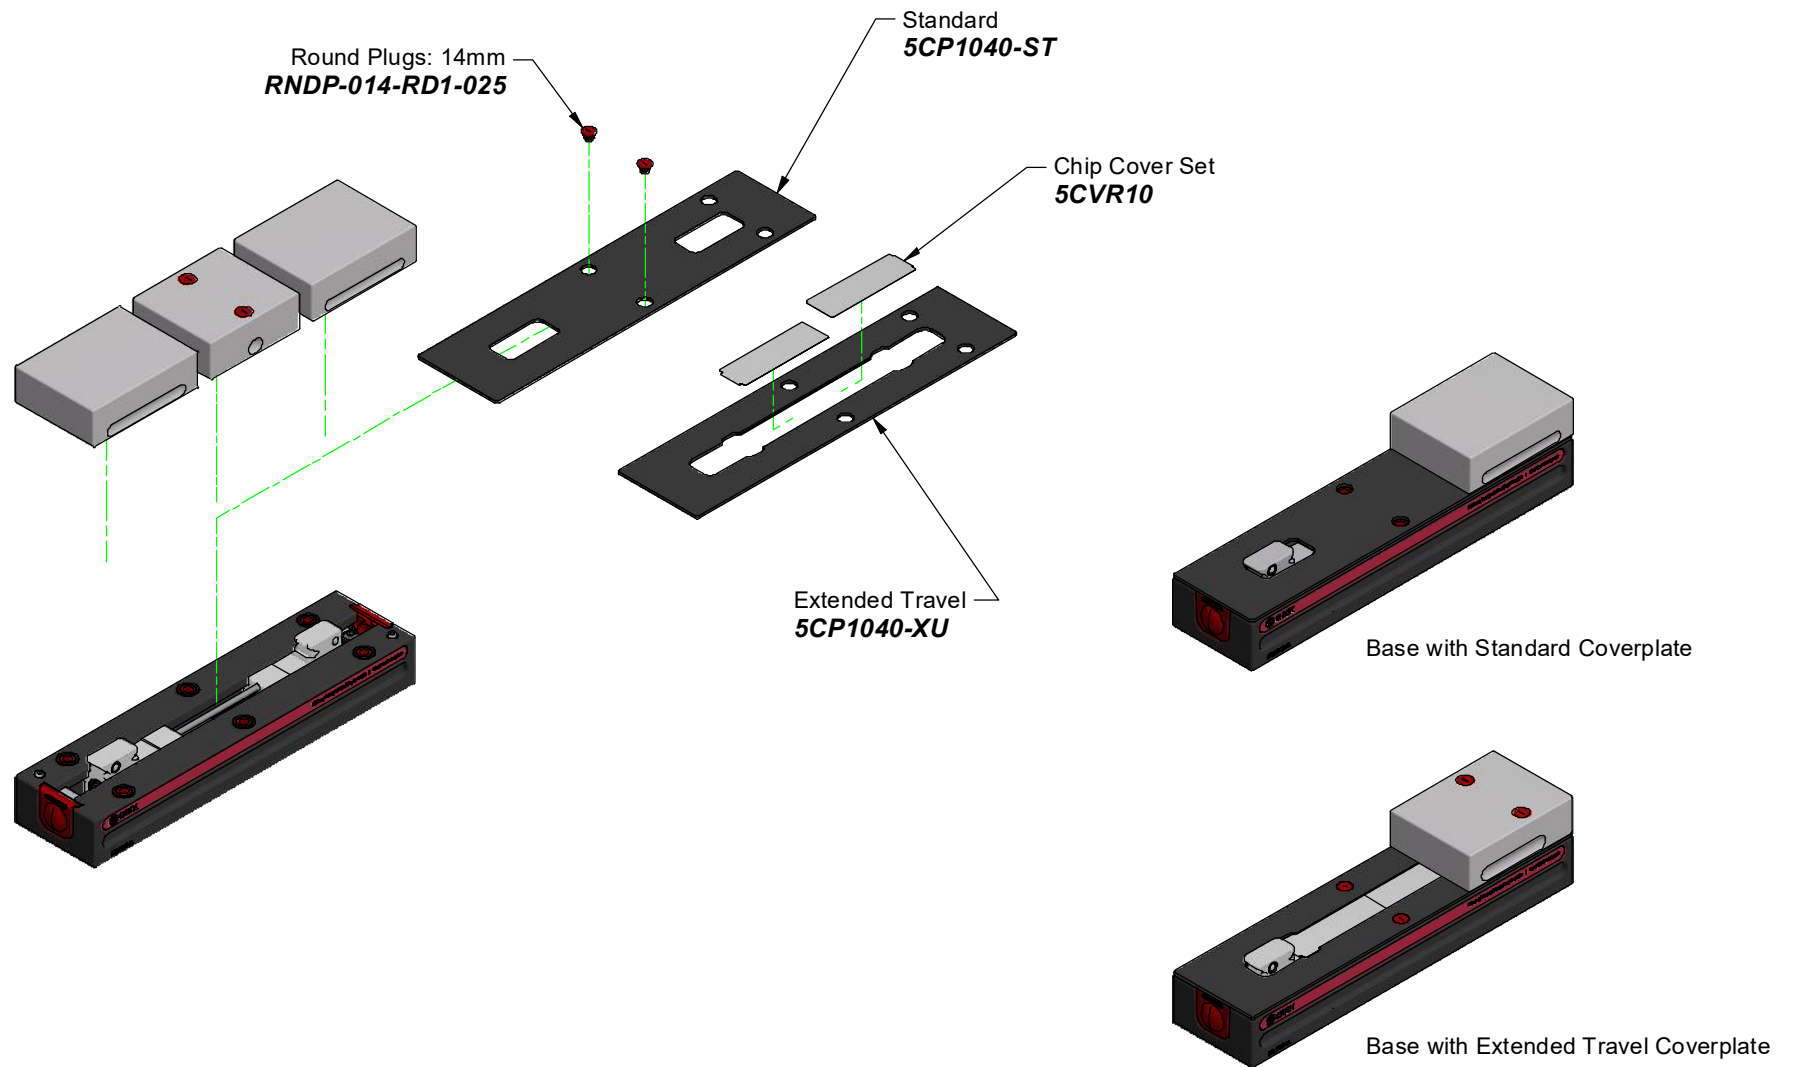

Contact us:
ChickWorkholding.com
724.772.1644

800-9004

REV
E


⑤ 1040
QwikLOK

5QL1040-AL: Page 13 of 19

Travel Jaws shown fully open


16 [0.63 in]
JAW TO JAW

22 [0.87 in]*
SLIDE TO
COVERPLATE

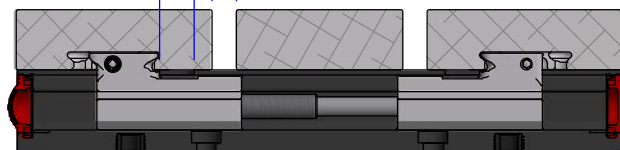

Standard Coverplate
Slide stops at coverplate

106 [4.17 in]*
SLIDE TO SLIDE


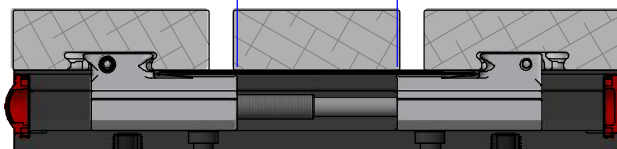


Extended Travel Coverplate

*Travel dimension

Shown with un-cut standard jaws.
Some slide assembly components hidden for clarity.

Holding Capacity Ideal for holding 2 parts ≤ 180mm (7")

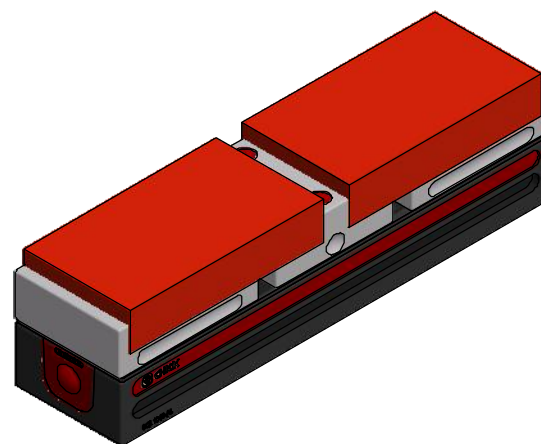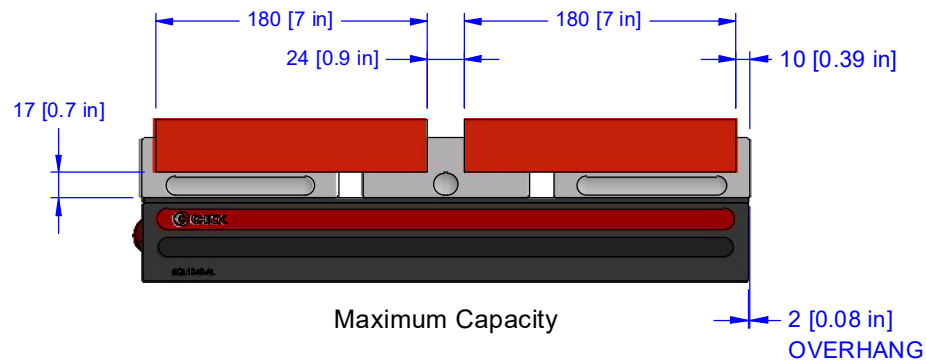

Contact us:
ChickWorkholding.com
724.772.1644


800-9004

REV
E


⑤ 1040
QwikLOK

5QL1040-AL: Page 14 of 19

Travel Jaws shown fully open

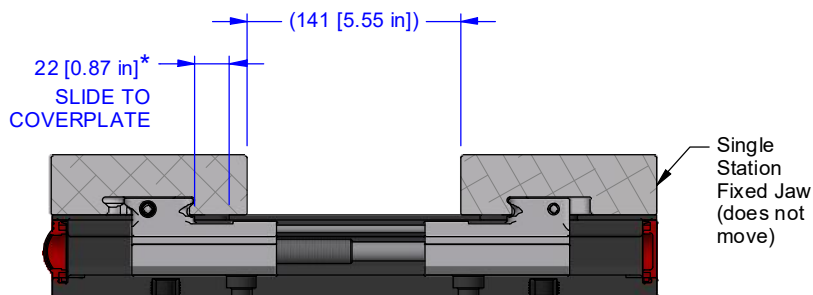

Standard Coverplate
Slide stops at coverplate

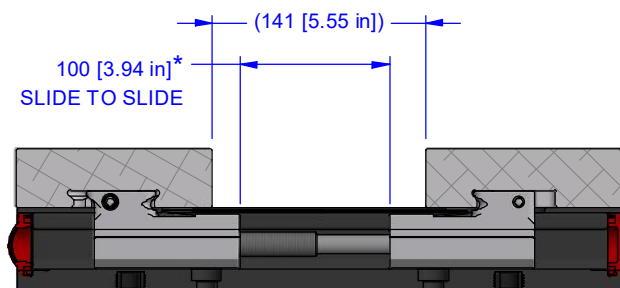


Extended Travel Coverplate
Slide stops at opposing slide


*Travel dimension

Shown with un-cut standard jaws.
Some slide assembly components hidden for clarity.


Holding Capacity Ideal for holding 1 part 140mm (5.5") to 380mm (15")

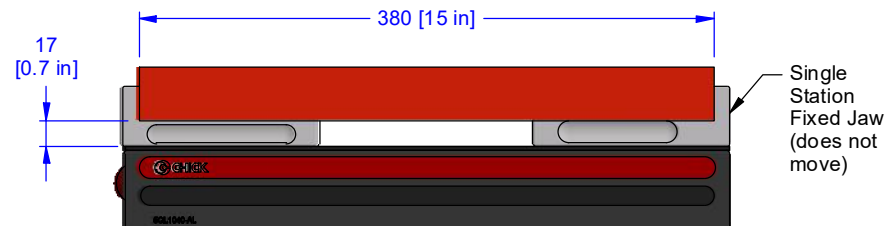

Maximum Capacity
(Standard or Extended Travel Coverplate)

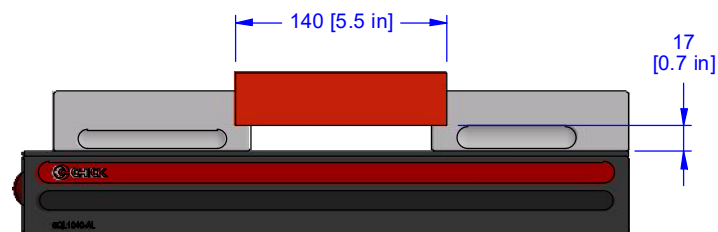

Minimum Capacity (Standard Coverplate)

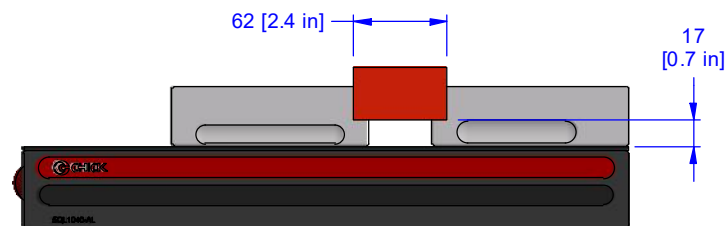

Minimum Capacity (Extended Travel Coverplate)

Contact us:
ChickWorkholding.com
724.772.1644


800-9004

REV
E


⑤ 1040
QwikLOK

5QL1040-AL: Page 15 of 19


Jaw Carriers Fully Open

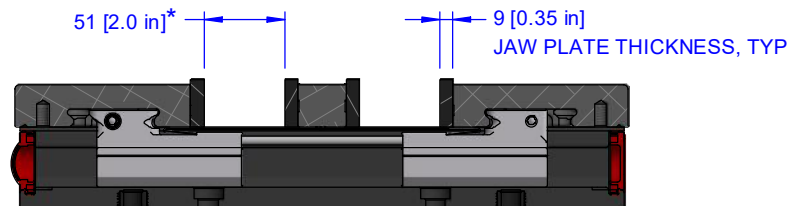

Dual Station Jaw Carriers
Jaw plate stops on opposing jaw plate, typical both sides

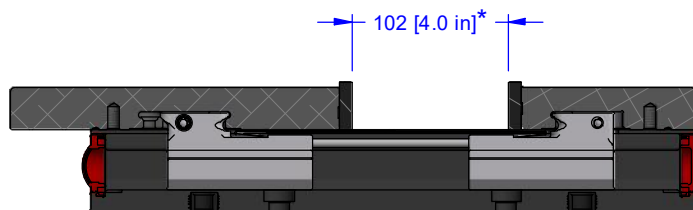

Single Station (Long Movable) Jaw Carriers
Jaw plate stops on opposing jaw plate

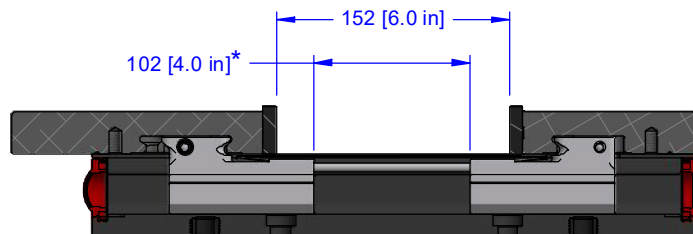


Single Station (Short Movable) Jaw Carriers
Slide stops on opposing slide; Jaw plates do not close on one another


*Travel dimension

Jaw carriers shown with standard hard jaw plates installed. Holding capacity may vary depending on jaw plate style.


Jaw Carriers Fully Closed

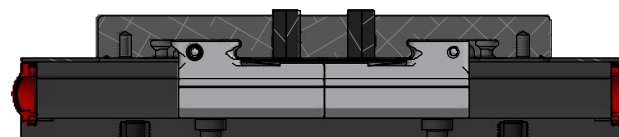

Dual Station Jaw Carriers

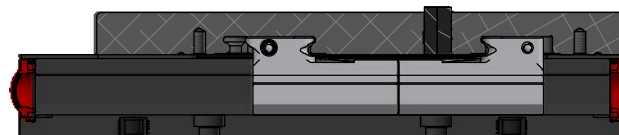

Single Station (Long Movable) Jaw Carriers

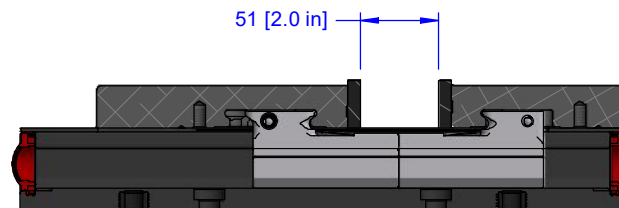

Single Station (Short Movable) Jaw Carrier

Contact us:
ChickWorkholding.com
724.772.1644

800-9004

REV
E


⑤ 1040
QwikLOK

5QL1040-AL: Page 16 of 19

Pounds (lb)

Force	=	Torque	x	Slope
lb	=	in-lb	x	8.0
lb	=	ft-lb	x	96

Torque (ft-lb)	Force (lb)
0	0
10	962
20	1923
30	2885
40	3846
50	4808
52	5000

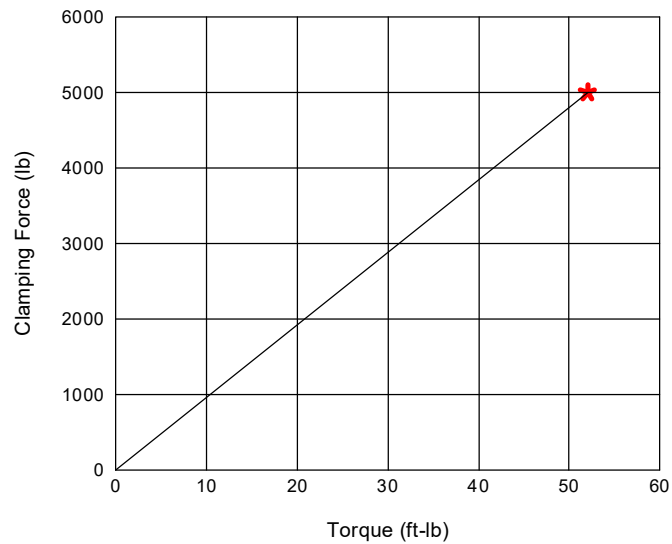


★ Maximum recommended torque. Actual results may vary.

Kilo Newtons (kN)

Force	=	Torque	x	Slope
n	=	N-m	x	315
kN	=	N-m	x	0.315

Torque (N-m)	Force (kN)
0	0
10	3.1
20	6.3
30	9.4
40	12.6
50	15.7
60	18.9
65	20.5
70	22.0

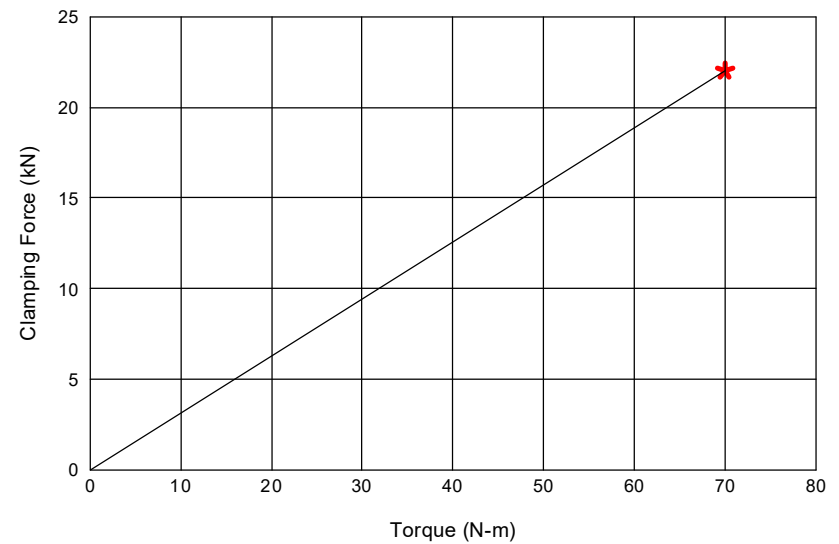

★ Maximum recommended torque. Actual results may vary.


Contact us:
ChickWorkholding.com
724.772.1644

800-9004

REV
E


⑤ 1040
QwikLOK

5QL1040-AL: Page 17 of 19

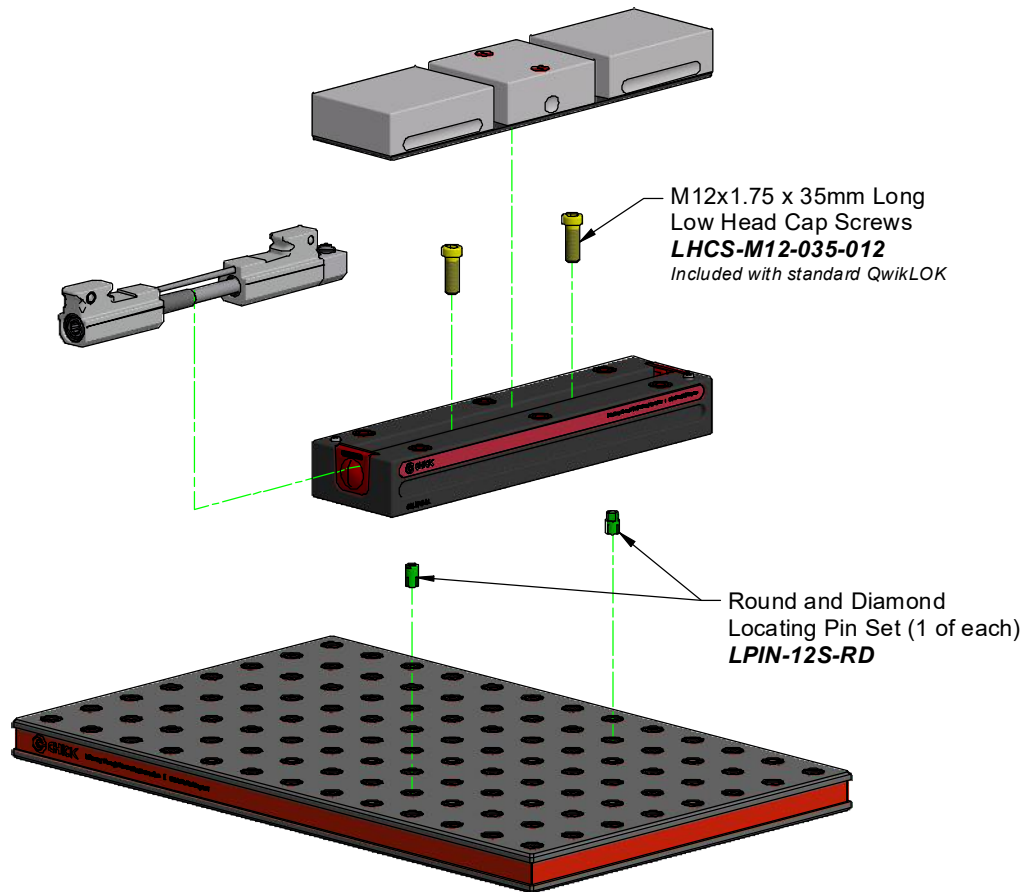

Round and Diamond Pins may be installed in the bottom of the base or in the foundation.

Locating Pin Orientation

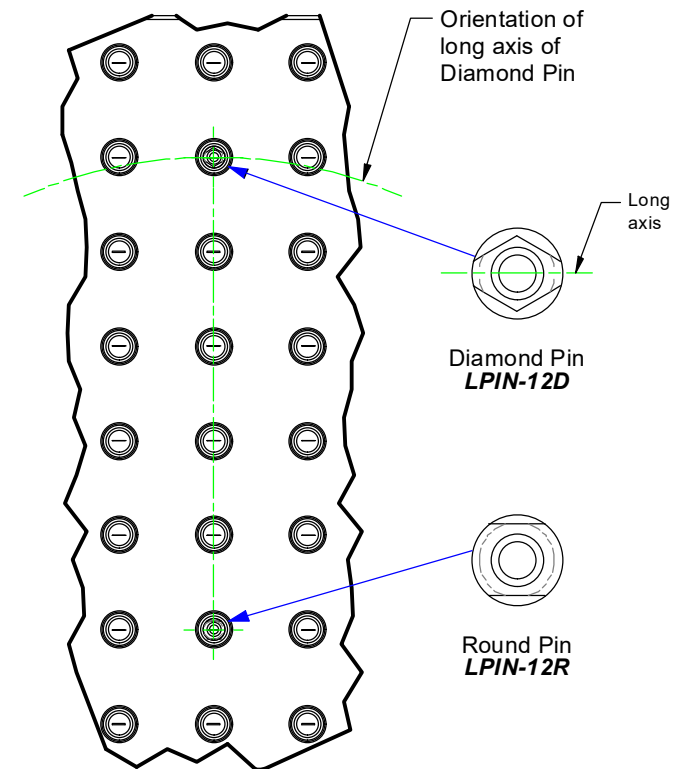

Mounting bolts and round and diamond pins highlighted for clarity

Contact us:
ChickWorkholding.com
724.772.1644


800-9004

REV
E

⑤ 1040
QwikLOK


5QL1040-AL: Page 18 of 19

T-Slotted Table

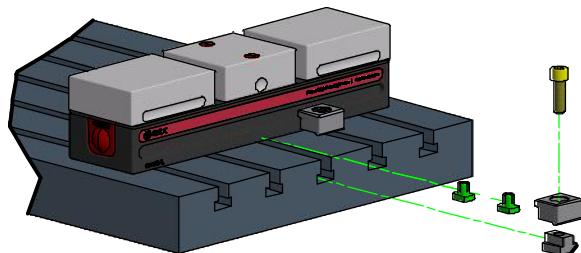


Locating

T-Slot Keys (set of 2)
MKE625 (.625")
MKE14X18 (14mm x 18mm)
MKE16 (16mm)

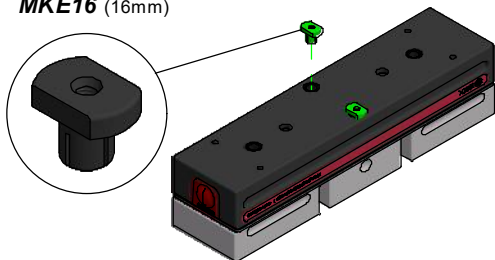

Mounting


Toe Clamps (set of 4)
005-0254
 T-nut and bolt
 not included




Mounting bolts and locating hardware highlighted for clarity

Customer-Modified Surfaces


Tombstone

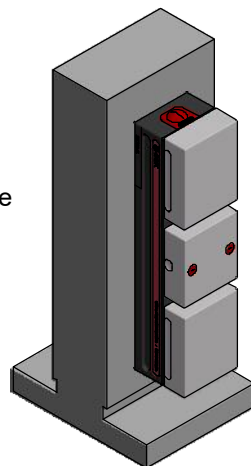

*Surfaces must be modified
 to accept mounting bolts and
 round and diamond locating pins.*

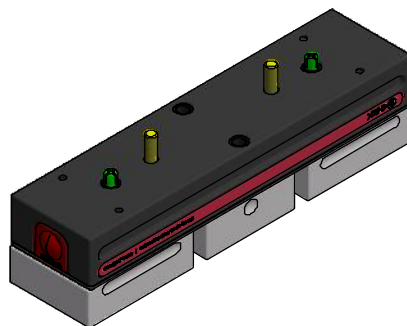


Trunnion

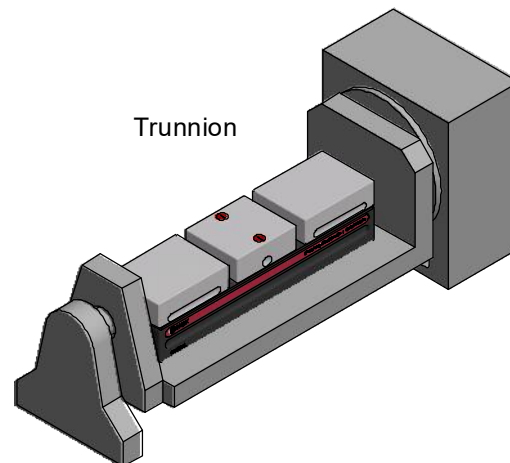


Locating

Round and Diamond Locating Pin Set (1 of each)
LPIN-12S-RD



Mounting

M12x1.75 x 35mm Low Head
 Cap Screws
LHCS-M12-035-012
 Included with standard QwikLOK



Contact us:
 ChickWorkholding.com
 724.772.1644

800-9004

REV
 E

⑤ 1040
QwikLOK

5QL1040-AL: Page 19 of 19