


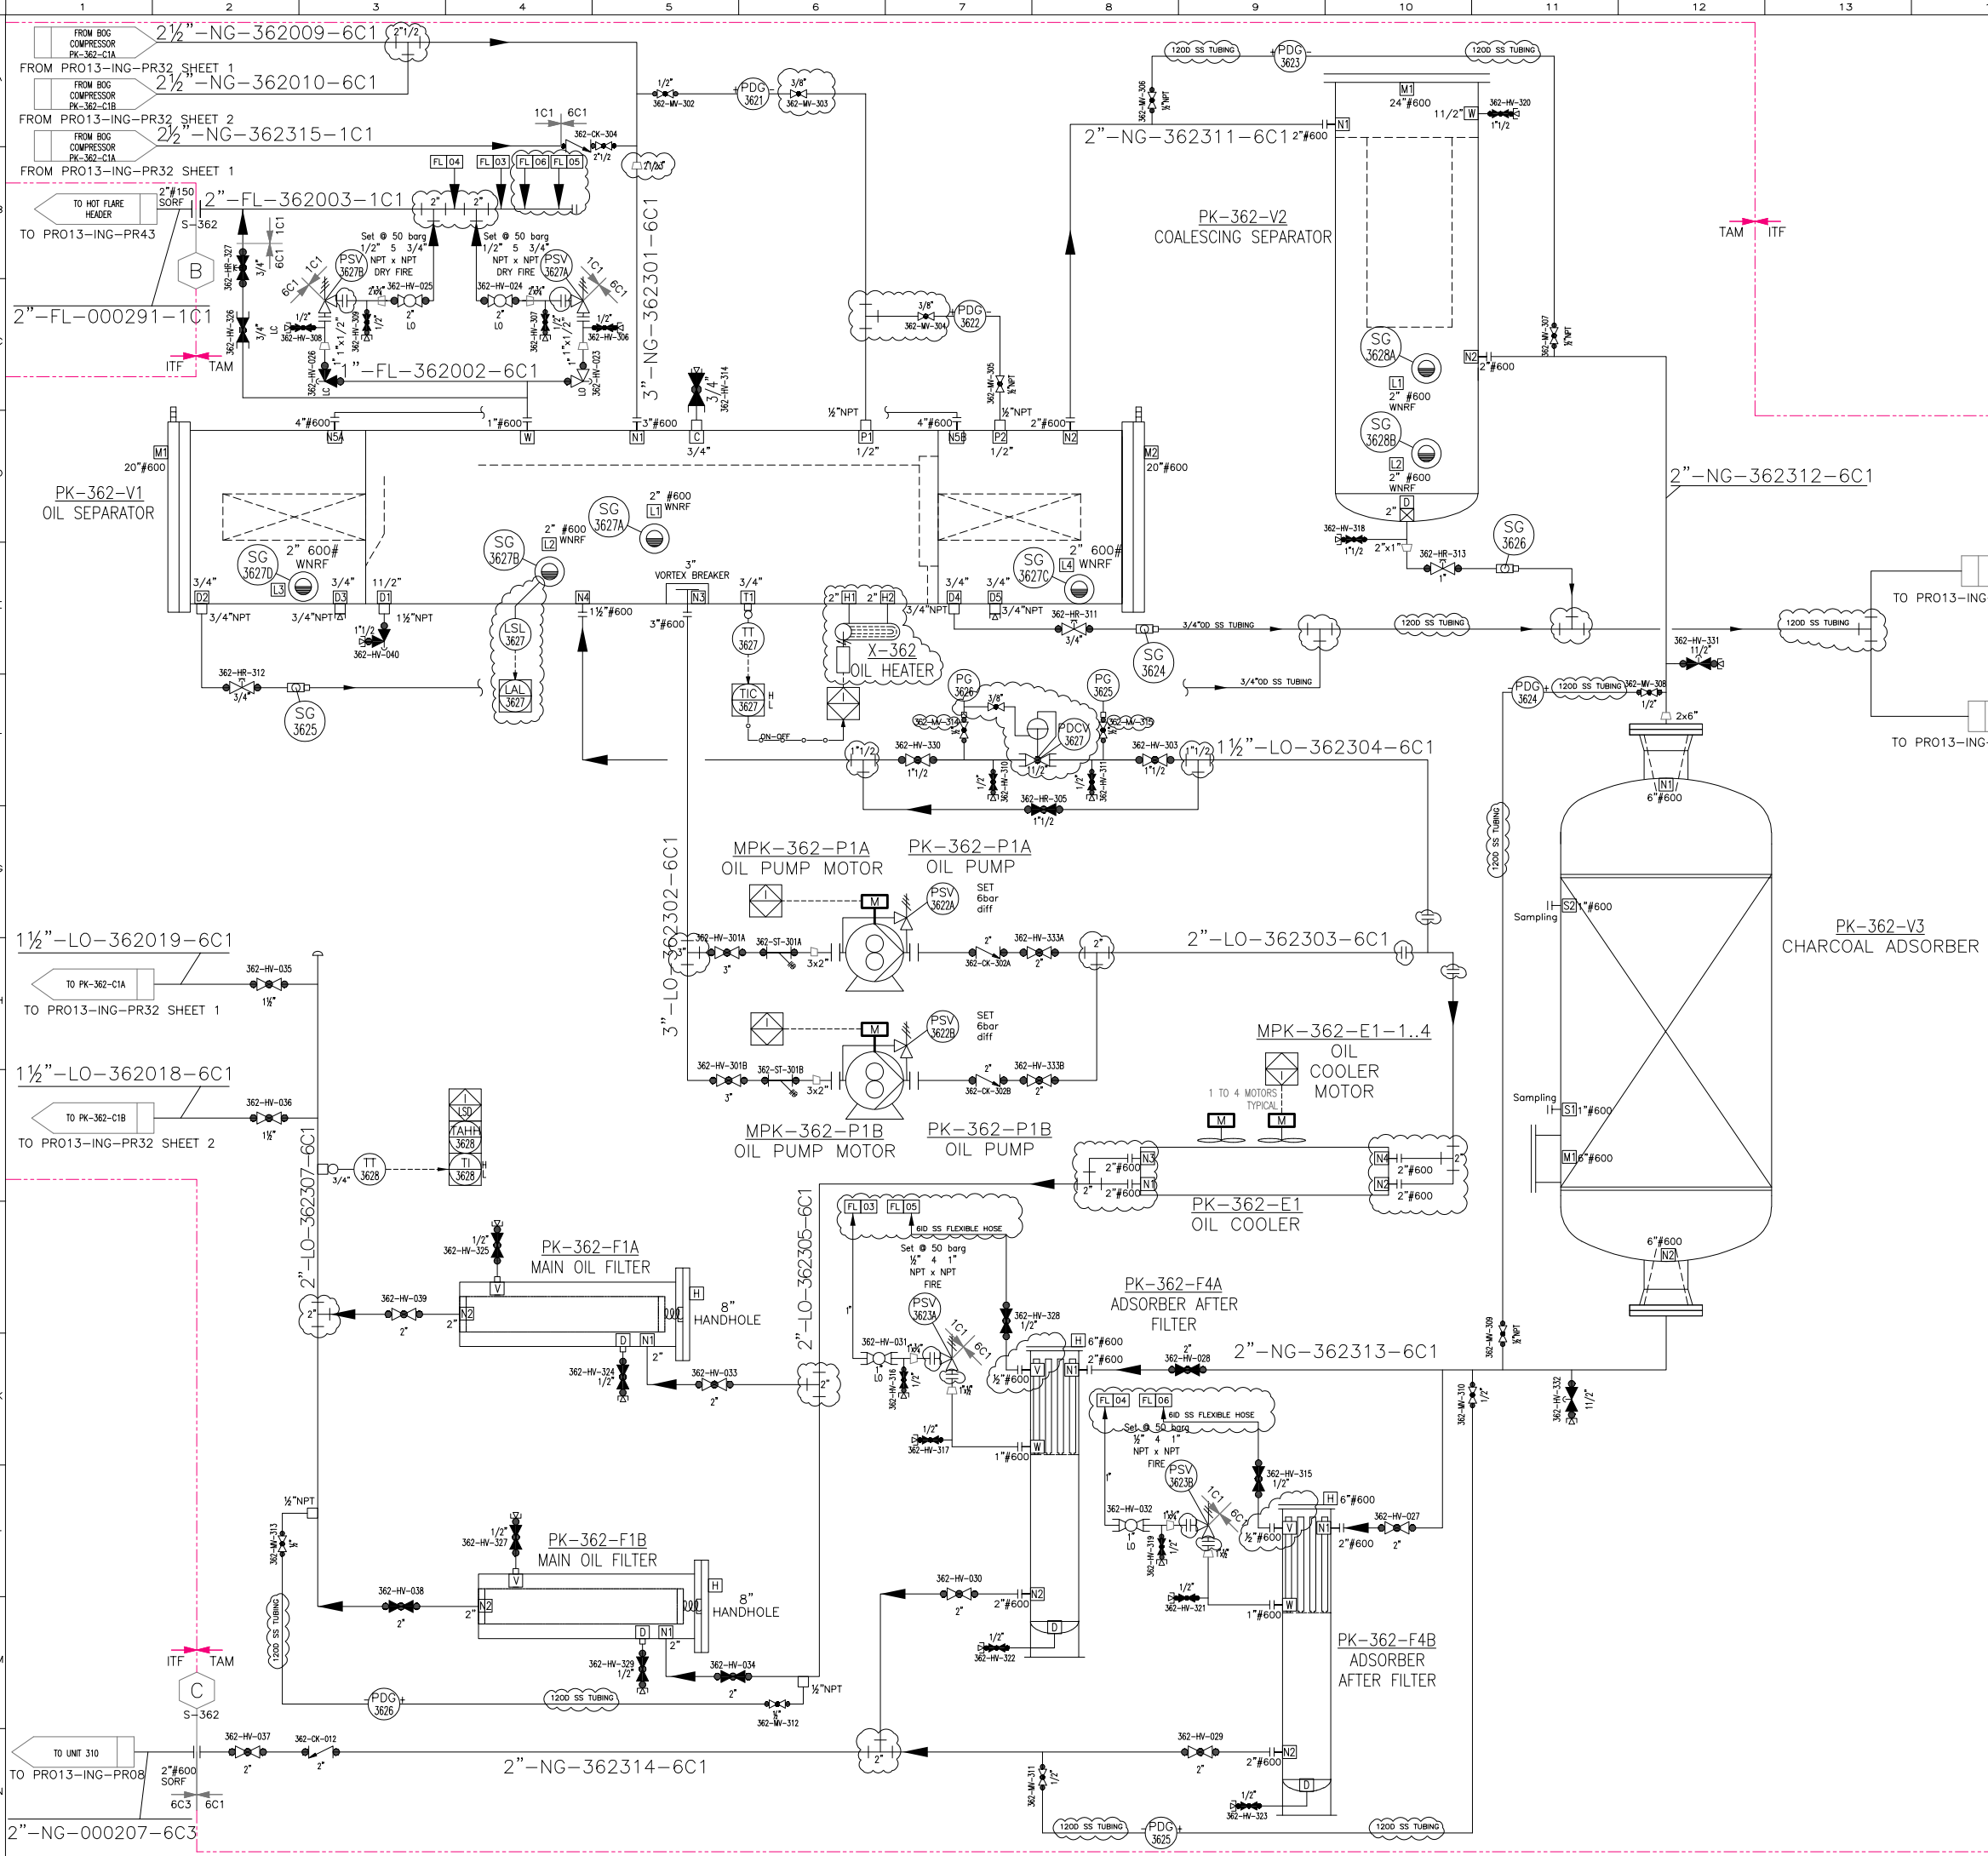

REFERENCE DOCUMENTS				
P&ID LEGEND		PRO13-ING-PROO 21044-PR-PID-00000		
PROCESS FLOW DIAGRAM		PRO10-ING-PRO1/02/03/04 21044-PR-PFD-00001		
MATERIAL SELECTION DIAGRAM		PRO08-ING-FR01 21044-PR-MSD-00001		
PK-362-V1 OIL SEPARATOR		PK-362-V2 COALESCING SEPARATOR		
DESIGN PRESSURE DESIGN TEMPERATURE INTERNAL DIAMETER SM TO SM CORROSION ALLOWANCE INSULATION LINING/CLADDING MATERIAL INTERNAL VOLUME INTERNAL ELEMENTS		50 bar g -15/120 °C 484 mm 6000 mm 0 mm NO N/A CS 1.2 m3 Coalescers		
PK-362-F1A/B MAIN OIL FILTER		PK-362-V3 CHARCOAL ADSORBER		
DESIGN PRESSURE DESIGN TEMPERATURE DIAMETER SM TO SM CORROSION ALLOWANCE INSULATION LINING/CLADDING MATERIAL INTERNAL VOLUME INTERNAL ELEMENTS		50 bar g -15/120 °C 20"NPS 2500 mm 0 mm NO N/A CS 0.49 m3 Charcoal & ceramic balls		
PK-362-P1A/B OIL PUMPS		MPK-362-P1A/B OIL PUMP ELECTRIC MOTOR		
SPEED RATED CAPACITY HEAD TYPE MANUFACTURER CASING DESIGN PRESSURE CASING DESIGN TEMPERATURE MODEL MOTOR POWER CASING MATERIAL		1450 rpm 132 l/min 3 bar VOLUMETRIC KRAUCHT 56 barg -15/120 °C KF112 3 kW CI		
PK-362-E1 OIL COOLER		MPK-362-E1...4 OIL COOLER FAN ELECTRIC MOTORS		
DESIGN DUTY DESIGN PRES. DESIGN TEMP. MATERIAL CORR. ALL. FAN Qty FAN ABS POWER each SURFACE AREA		118.4 kW 56 bar g -15/120 °C CS/ Al fin 0 mm 4 3 kW HOLD m2		
PK-362-F4A/B ADSORBER AFTER FILTER		X-362 OIL HEATER		
DESIGN PRESSURE DESIGN TEMPERATURE DIAMETER SM TO SM CORROSION ALLOWANCE INSULATION LINING/CLADDING MATERIAL INTERNAL VOLUME INTERNAL ELEMENTS		50 bar g -15/120 °C 6" NPS 1000 mm 0 mm No N/A CS 0.03 m3 Cartridge		
		SPEED RATED CAPACITY ABSORBED POWER		
		HOLD rpm HOLD m3/h 3 kW		
		FL0X VENT TO FLARE HEADER		
		----- TAM SUPPLY LIMIT		