


C-341-4
AMMONIA COMPRESSOR

MC-341-4
AMMONIA COMPRESSOR 1 MOTOR


SPEED	2950 rpm	SPEED	2950 rpm
SWEEP VOLUME	1775.50 m3/h	RATED POWER	560 kW
VI	3	VOLTAGE	690 Vdc
MODEL	WR-V30T-28	FREQUENCY	50 Hz
MANUFACTURER	GEA	STARTING	VFD
CASING DESIGN PRESSURE	28 barg	ENCLOSURE PROTECTION	IP55
CASING DESIGN TEMPERATURE	-40/120 °C	STD	IEC
CASING MATERIAL	CAST IRON	FRAME SIZE	355L

REFERENCE DOCUMENTS

P&ID LEGEND	PRO13-ING-PRO0
PROCESS FLOW DIAGRAM	21044-PR-PID-00000
UTILITY FLOW DIAGRAM	PRO10-ING-PR01/02/03/04
MATERIAL SELECTION DIAGRAM	21044-PR-PFD-00001
	PRO10-ING-PR11
	21044-PR-UFD-00001
	PRO08-ING-FR01
	21044-PR-MSD-00001

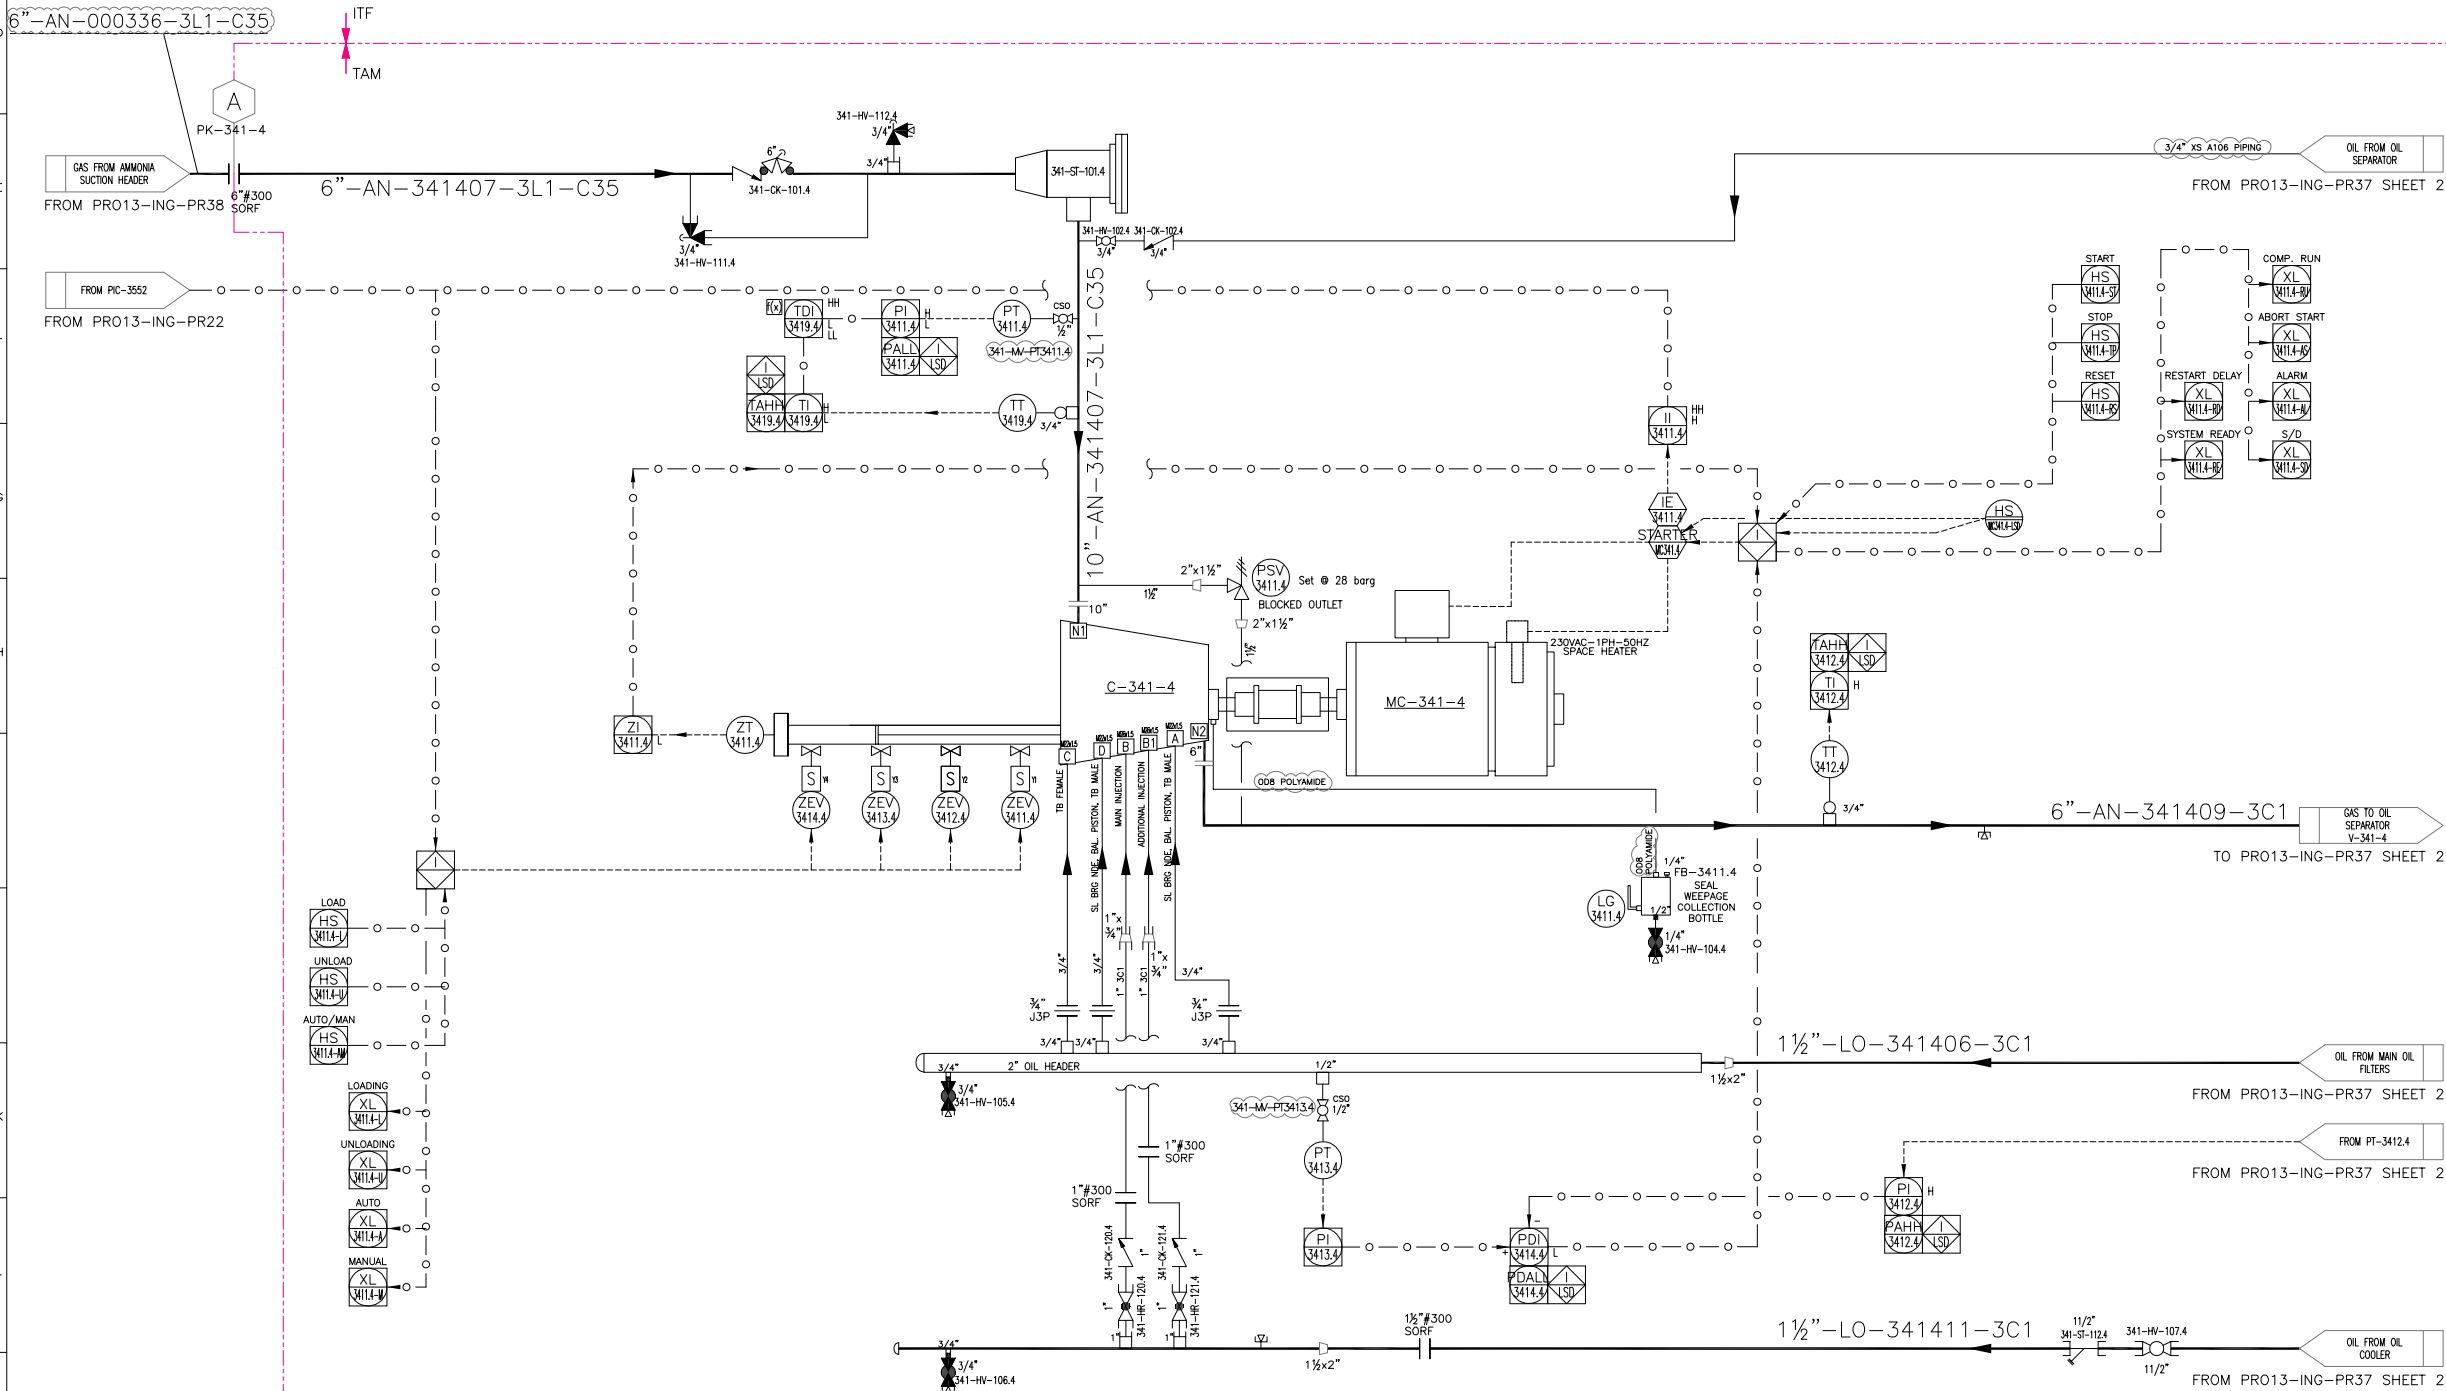

1	25 Mar 2026	ISSUE FOR COMMISSIONING	TAM (JB)	TAM (MM)	LCAMPLONE
0	08 Jan 2026	AS BUILT	TAM (JB)	LCAMPLONE	W.BOUALALI
Rev.	Date	Description	Draft	Check'd	Approved
Customer: MANAENERGY			OFFICES: Mahaj Riad Center, Batiment 6, 3eme etage, Avenue Al Az, Hay Ryad, 10100 Rabat, Morocco		
Contractor: ITALFLUID			OFFICES: VIA VVALDI,4 MONTESILVANO (ITALY) Tel.+39 085 4224374 fax+39 085 4220742		
Engineering: ITALFLUID			OFFICES: VIA VVALDI,4 MONTESILVANO (ITALY) Tel.+39 085 4224374 fax+39 085 4220742		
Technology Vendor: TECHNICAL AMERICA INC			OFFICES: 301 N Smith Avenue, 92880 Corona, California (USA) Ph.+1 951 272 9540		
TITLE: LNG TENDRARA PLANT			OBJECT: P&ID PACKAGE PK-341-4 (UNIT 340)		
TYPE	SCALE	DOCUMENTS ID:	VENDOR DOC CODE:		SHEET/OF
A1	N/A	PRO13-ING-PR37	21044-PR-PID-34004		1/2

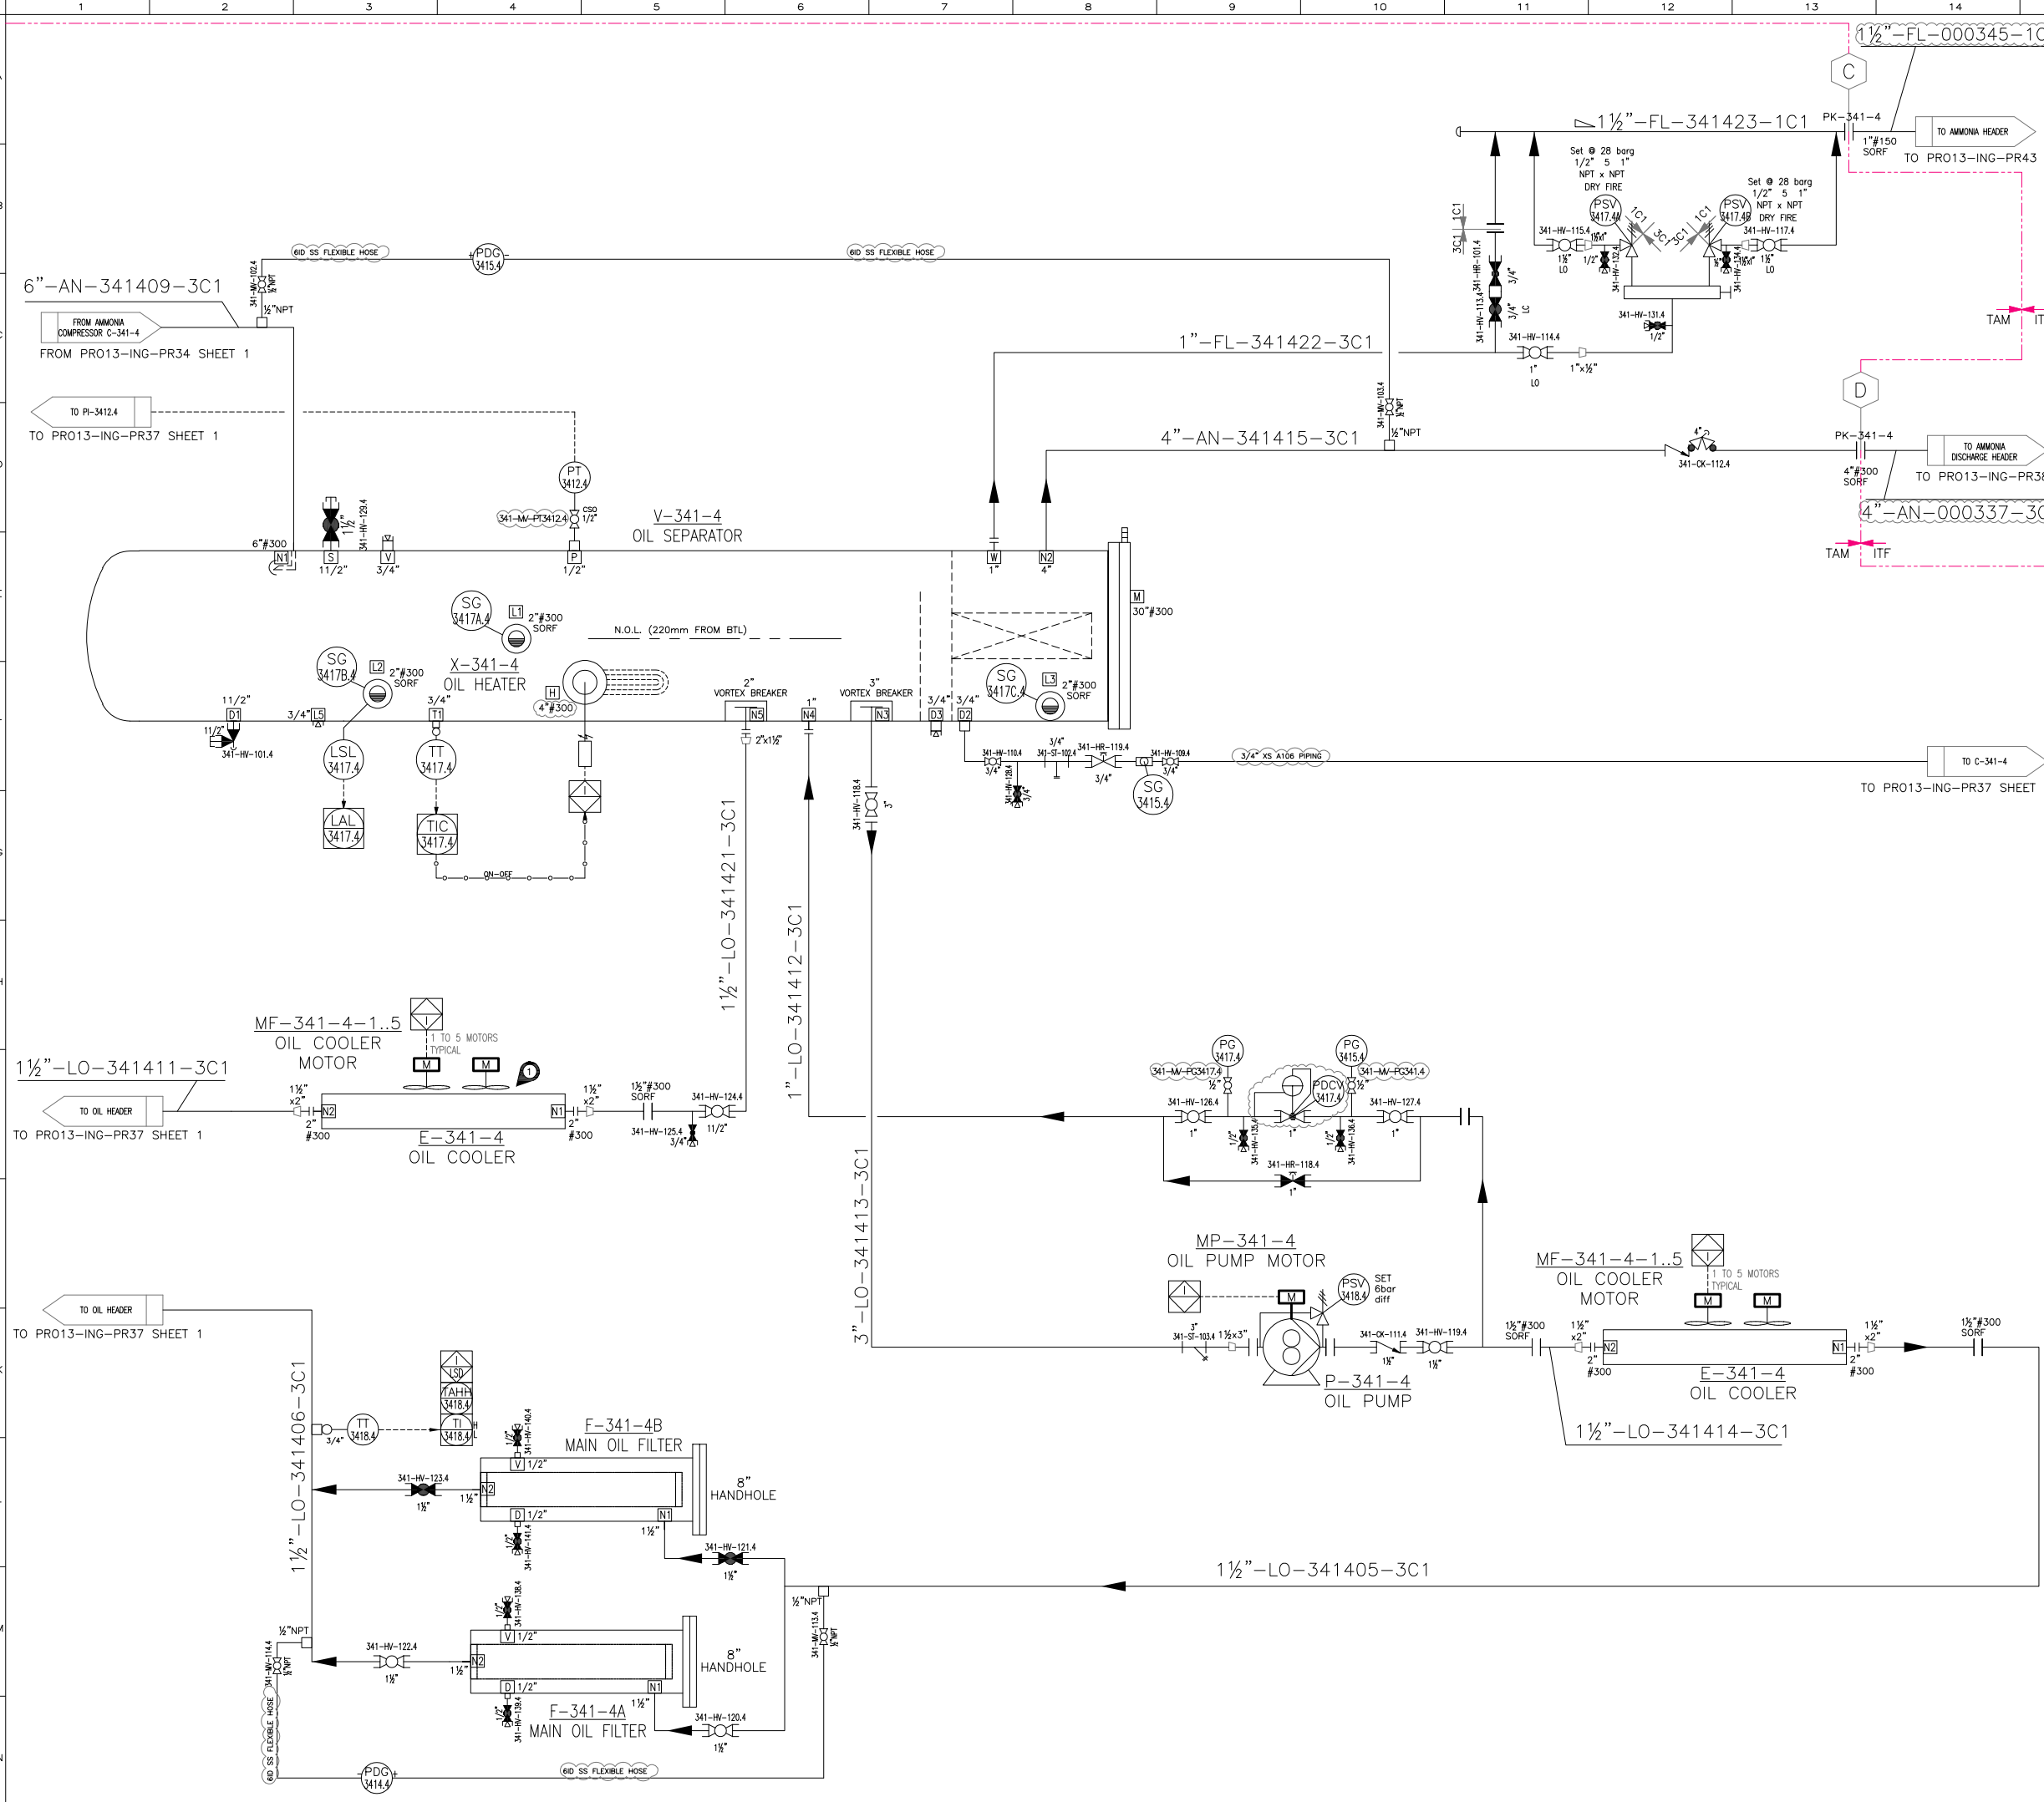

REFERENCE DOCUMENTS

P&ID LEGEND	PRO13-ING-PROO
PROCESS FLOW DIAGRAM	21044-PR-PID-00000
UTILITY FLOW DIAGRAM	PRO10-ING-PRO1/02/03/04
MATERIAL SELECTION DIAGRAM	21044-PR-PFD-00001
	PRO10-ING-PR11
	21044-PR-UFD-00001
	PRO08-ING-FR01
	21044-PR-MSD-00001

V-341-4

OIL SEPARATOR

DESIGN PRESSURE	15/28 bar g
DESIGN TEMPERATURE	-15/120 °C
DIAMETER	762 00 mm
TL TO TL	4600 mm
CORROSION ALLOWANCE	0 mm
INSULATION	NO
LINING/CLADDING	N.A.
MATERIAL	CS
INTERNAL VOLUME	2.12 m3
INTERNAL ELEMENTS	COALESCERS

F-341-4A/B

MAIN OIL FILTER

DESIGN PRESSURE	34 bar g
DESIGN TEMPERATURE	-15/120 °C
DIAMETER	8" NPS
SM TO SM	600 mm
CORROSION ALLOWANCE	0 mm
INSULATION	NO
LINING/CLADDING	N.A.
MATERIAL	CS
INTERNAL VOLUME	0.023 m3
INTERNAL ELEMENTS	PARTICULATE FILTER

P-341-4

OIL PUMP

SPEED	1450 rpm
RATED CAPACITY	135 l/min
HEAD	4 bar
TYPE	VOLUMETRIC
MANUFACTURER	KRACHT
CASING DESIGN PRESSURE	34 barg
CASING DESIGN TEMPERATURE	-15/120 °C
MODEL	KF100
MOTOR POWER	4 kW
CASING MATERIAL	CI

MP-341-4

OIL PUMP ELECTRIC MOTOR

SPEED	1450 rpm
RATED POWER	4 kW
VOLTAGE	690 Vac
FREQUENCY	50 Hz
STARTING	DOL
ENCLOSURE PROTECTION	IP55
STD	IEC
FRAME SIZE	112

E-341-4

OIL COOLER

DESIGN DUTY	338 kW
DESIGN PRESSURE	28 / 34 bar g
DESIGN TEMP.	-15/120 °C
MATERIAL	AS1304 / Al fin
CORR. ALL.	0 mm
FAN Qty	10
FAN ABS POWER each	3 kW
SURFACE AREA	4304 m2

F-341-4-1...10

FAN

SPEED	1450 rpm
RATED CAPACITY each	27634 m3/h
ABSORBED POWER	3 kW

MF-341-4-1...10

OIL COOLER FAN ELECTRIC MOTORS

SPEED	1450 rpm
RATED POWER	4 kW
VOLTAGE	400/3 Vac
FREQUENCY	50 Hz
STARTING	DOL
ENCLOSURE PROTECTION	IP55
STD	IEC
FRAME SIZE	112M

X-341-4

OIL HEATER

RATED POWER	2.25 (3x 0.75) kW
SUPPLY VOLTAGE	690 Vac-50Hz-3ph

NOTES:

1- OIL COOLER CAN BE SPLIT IN 2 SEPARATE OIL COOLER OR COMBINED IN ONE OIL COOLER WITH SEPARATE CIRCUIT.

TAM SUPPLY LIMIT

Rev.	1	25 Mar 2026	ISSUE FOR COMMISSIONING	TAM (JB)	TAM (MM)	LCAMPLONE
0	08 Jan 2026	AS BUILT		TAM (JB)	LCAMPLONE	W.BOUALALI
Rev.	Date	Description		Draft	Check'd	Approved

Customer: MANAENERGY

Contractor: ITALFLUID

Engineering: ITALFLUID

Technology Vendor: TECHNICAL AMERICA INC

TITLE: LNG TENDRARA PLANT

OBJECT: P&ID PACKAGE PK-341-4 (UNIT 340)

TYPE: A1

SCALE: N/A

DOCUMENTS ID: PRO13-ING-PR37

VENDOR DOC CODE: 21044-PR-PID-34004

SHEET/OF: 2/2