


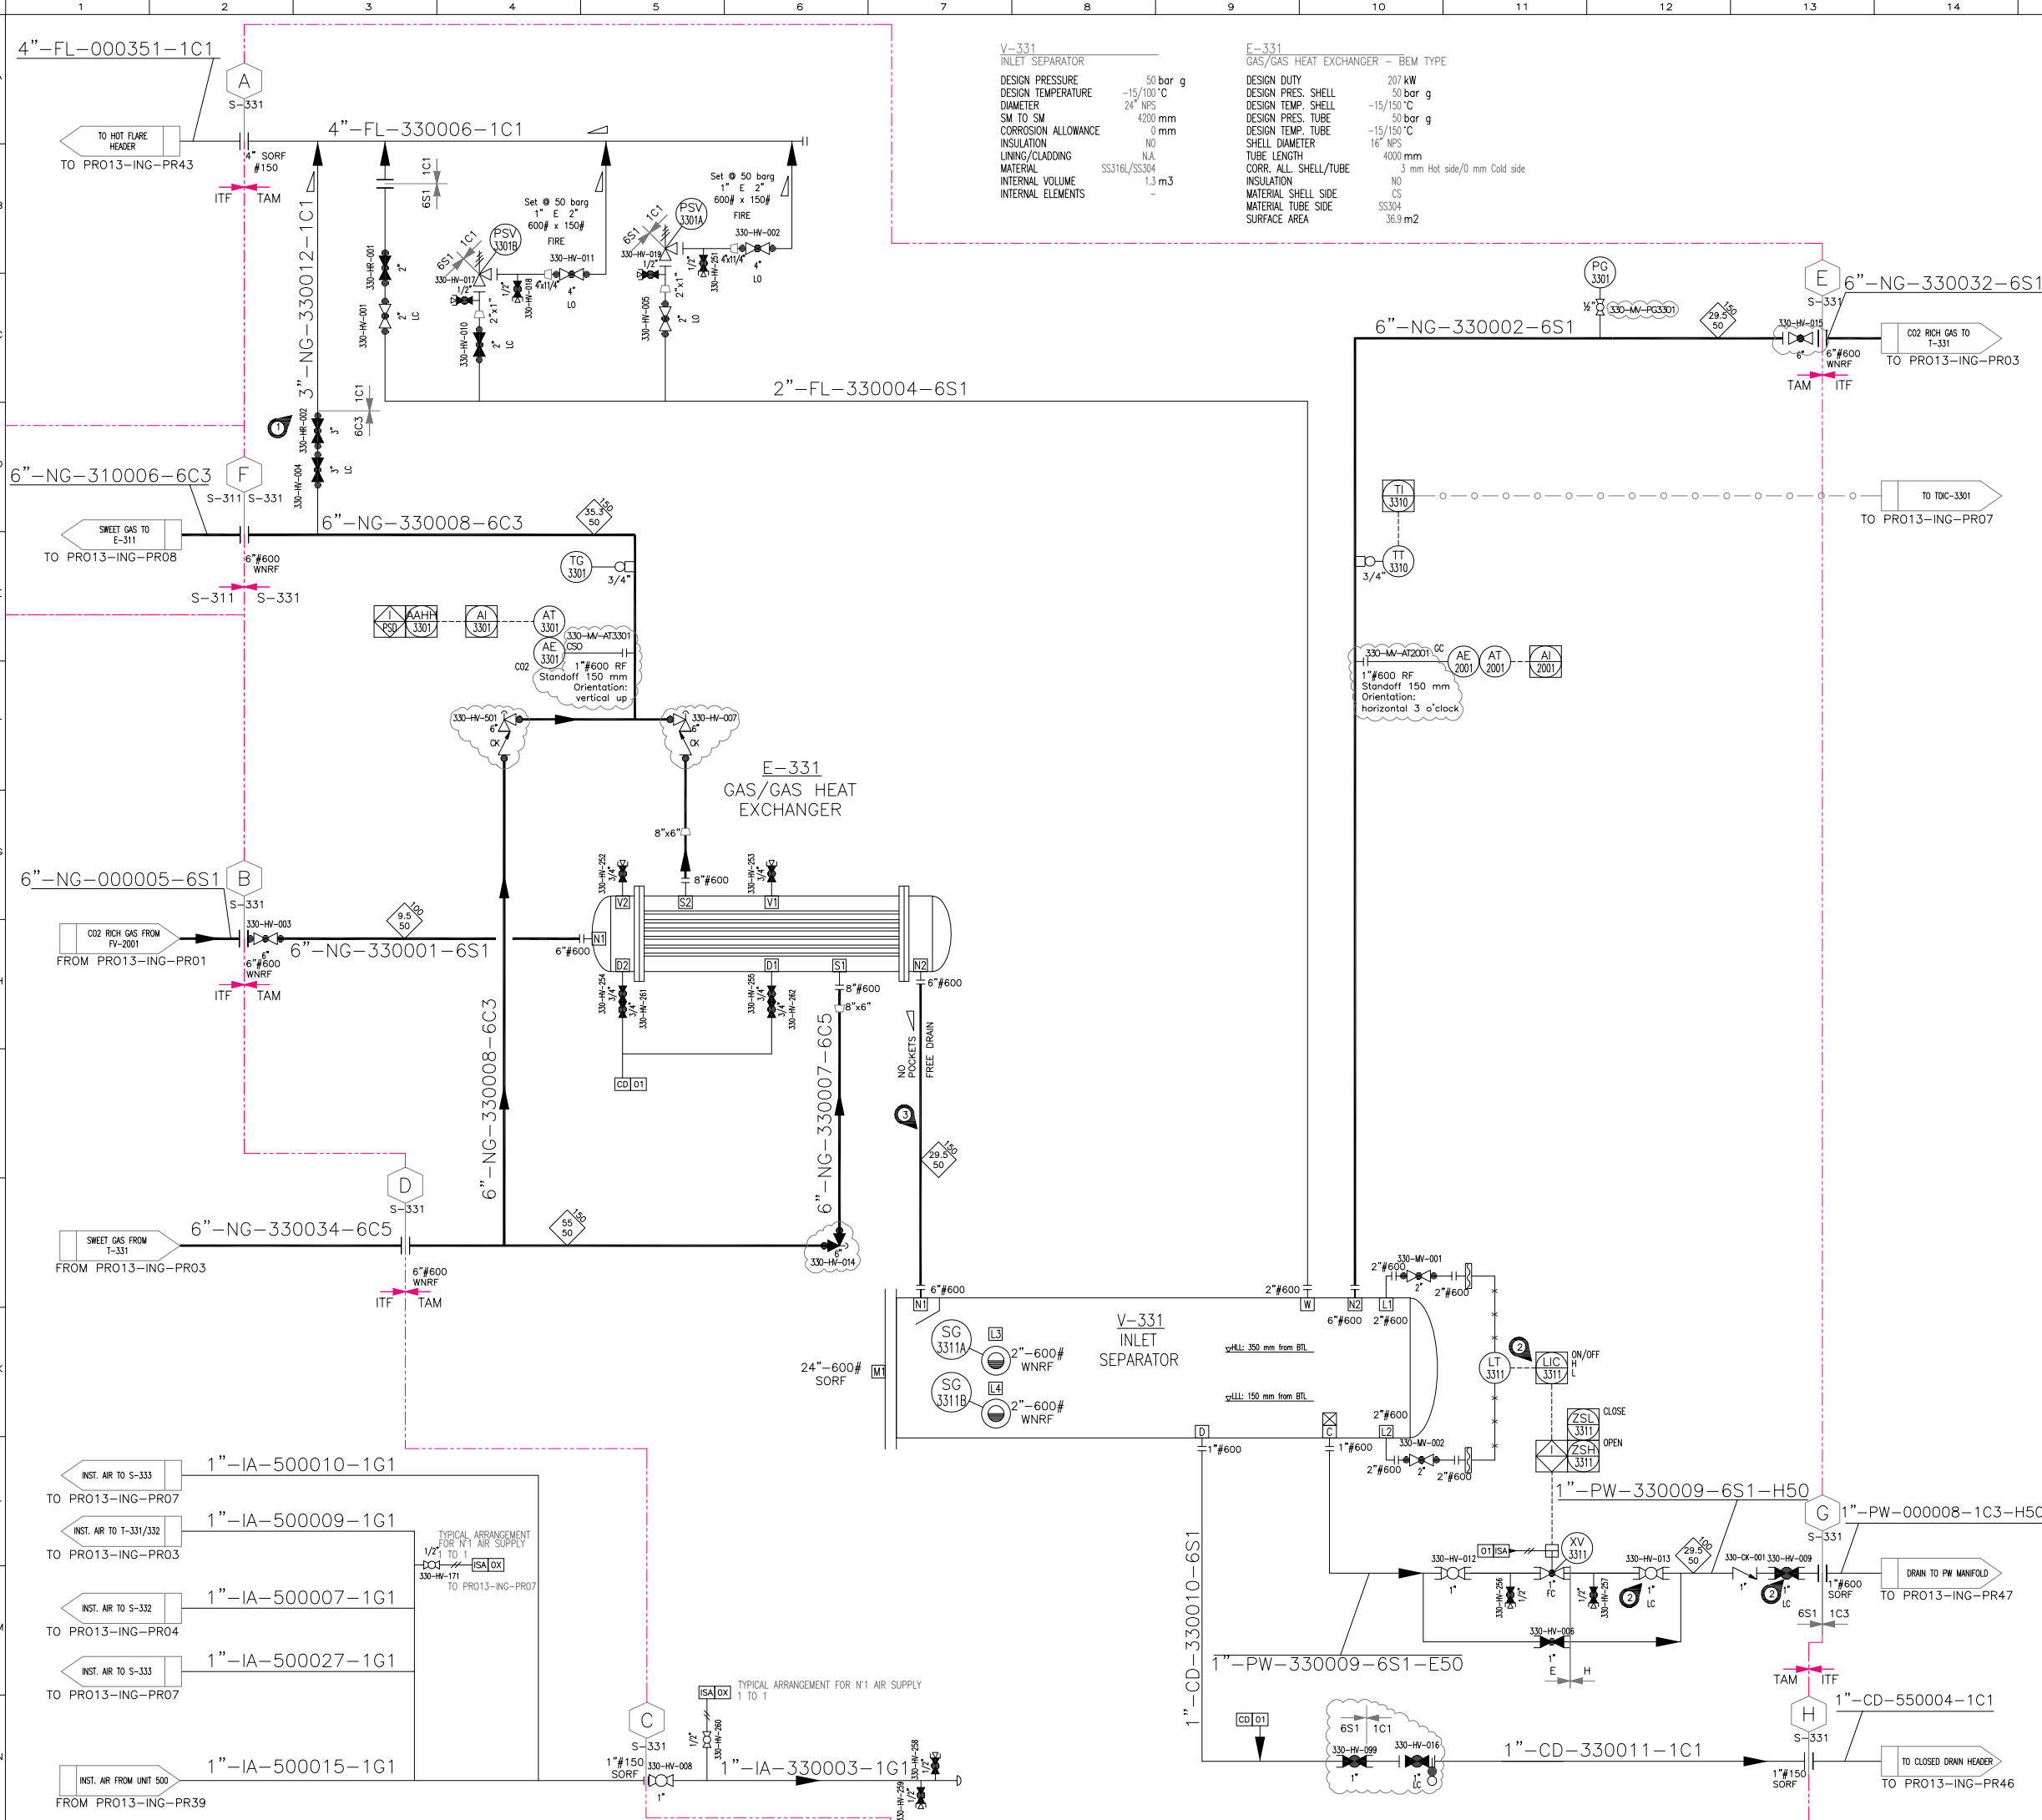

15		16		17		18	
REFERENCE DOCUMENTS							
P&ID LEGEND				PRO13-ING-PRO0 21044-PR-PID-00000			
PROCESS FLOW DIAGRAM				PRO10-ING-PRO1/02/03/04 21044-PR-PFD-00001			
UTILITY FLOW DIAGRAM				PRO10-ING-PR11/12 21044-PR-UFD-00001			
MATERIAL SELECTION DIAGRAM				PRO08-ING-FR01 21044-PR-MSD-00001			
ISA0X INSTRUMENT SUPPLY AIR CD0X CLOSED DRAIN TO DRAIN HEADER							
NOTES							
1 VENT TO FLARE FOR START UP FOR PRESSURIZING V-331, E-331 AND T-331. THIS LINE IS DESIGNED FOR 50% OF DESIGN FLOWRATE. 2 LIQUID CONTROL USED ONLY FOR START UP. AFTER START UP MANUAL VALVES 330-HV-009/013 SHALL BE LOCKED CLOSED. 3 THERE IS NO REAL LINE BETWEEN E-331 AND V-331, NOZZLES N1 ON V-331 AND N2 ON E-331 WILL BE CONNECTED FLANGE TO FLANGE. 4 DESIGN AND EXECUTION OF ELECTRICAL TRACING BY ITF.							
----- TAM SUPPLY LIMIT							
</							