IRWIN TOOLS

IRWIN STRAIT-LINE SPEEDLINE REEL

MULTIPLE STRIKES PER PULL: 100 ft. abrasion-resistant poly line provides 5 to 6 strikes per pull
IMPROVED HOOK STORAGE: Hook dock is nested to help reduce hook snags
QUICK AND EASY CHALK REFILLS: Designed with a wide door for increased visibility when refilling

PART NO.	DESCRIPTION
IRN48442	100 ft.

DEWALT

Chalk Reel And Kit

- 1/4 turn cap for a secure fit
- 1 mm line for tight, clean marks
- Intergraded clutch for reduced line jams and smooth line release
- Over mold grip for slip resistance and drop protection
- Flush handle for compact storagel

PART NO.	COLOR
DWHT47373L	Blue
DWHT47374L	Red

Chalk Lines/Plumb Bobs

- **Durable brass plating**
- **Corrosion resistant lacquer finish**
- **Replaceable tip and removable cap for easy string installation**

PART NO.	DESCRIPTION
112	12 oz Plumb Bob
124	24 oz Plumb Bob
132	32 oz Plumb Bob

STANLEY

FatMax® 100 ft. Chalk Reel

- Patented on-board hook storage with stainless steel hook
- Sliding door for easy filling
- Folding crank handle stores into case

PART NO.	DESCRIPTION
47-440	100 ft.

STANLEY

FatMax® 100 ft. Chalk Reel Kit

- 3:1 gear ratio for 3X* faster rewind
- Body holds up to a 3 oz. chalk
- Stainless-steel interlocking hook
- **Kit Includes:** Chalk Reel, 4 oz. Bottle of Blue Chalk and Fine Tip Marker

PART NO.	DESCRIPTION
47-681L	Kit

IRWIN TOOLS

8 oz Chalk Line

- Marking chalk is ideal for exterior use
- Marks are permanent
- Visible after weeks of weather exposure and jobsite wear

PART NO.	DESCRIPTION
IRN64901	Blue
IRN64902	Red
IRN4935519	Perm Red
IRN4935520	Black

IRWIN TOOLS

5 lb Chalk Refills

- Marking chalk is ideal for exterior use
- Marks are permanent
- Visible after weeks of weather exposure and jobsite wear

PART NO.	COLOR
5 LB. CHALK REFILLS	
IRN4935526	Black
1IRN65101ZR	Blue
IRN65105	Orange
16450021	Permanent Red

STANLEY_SUPPLY.indd 120-121

CHALK-RITE® JAM FREE

- Jam-free braided line creates Extra Bold 0.04 in (1.0 mm) lines
- Durable ABS case with large refill port
- Smooth-running five-gear winding mechanism

PART NO.	SIZE
CR301JF	100 ft.

CHALK-RITE® II ULTRA-THIN

- Specially crafted braided line creates Ultra-Thin 0.02 in (0.5 mm) lines
- Large gasket-sealed refill port
- Heavy-duty aluminum case
- Smooth-running five-gear winding

PART NO.	SIZE
CR202B-P	100 ft.

CHALK-RITE® II EXTRA BOLD

- Premium braided line creates Extra Bold 0.04 in (1.0 mm) lines
- Large gasket-sealed refill port
- Heavy-duty aluminum case
- Smooth-running five-gear winding mechanism

PART NO.	SIZE
CR201R-PR	100 ft.

CHALK-RITE® DURA

- 1.0mm braided line creates an Extra Bold 0.04 in (1.0 mm) line
- Heavy-duty aluminum case integrated with non-slip grip surface
- Large gasket-sealed refill port
- Double-speed winding mechanism

PART NO.	SIZE
CR401S	100 ft.

SNAP LINE DYE

Ultra-fine powdered chalk for semi-permanent marking tasks

3 SIZES

- 10.5 oz. / 300 g
- 32 oz. / 907 g
- 6 lbs. / 2700 g

MICRO CHALK

- Coats the line evenly and thoroughly for bold, uniform lines

3 SIZES

- 10.5 oz. / 300 g
- 32 oz. / 907 g
- 6 lbs. / 2700 g

Block Torpedo Level

- Technology for an accurate, clear reading from any position
- 360 adjustable vial allows the user to set or identify any angle
- Amplified rare earth magnets attach to metal materials delivering 2x holding power
- Heavy-duty die cast aluminum frame and drop prevention loop ensures lifetime durability

PART NO.
48-22-5210

Concrete Level

- Easy clean magnesium base
- Dedicated concrete working edges - round edge for smoothing and squared edge for screeding and striking
- Best vial readability - marked with commonly used pitch degrees 1/8" and 1/4" (1% & 2%), critical for water run-off for sidewalks, driveways, curbs etc.
- Ergonomic keyhole frame delivers maximum durability and continuous grip across entire level

PART NO.	SIZE
MLCON24	24"
MLCON48	48"
MLCON72	72"

MILWAUKEE MARKERS

INKZALL™ Jobsite Markers

- Clog resistant marker tip
- Writes through dusty, wet and oily surfaces as well as concrete and rough surfaces
- Built-in hard hat storage clip and lanyard hole
- Non-toxic ink dries in seconds
- Anti-roll body design

PART NO.	COLOR	TIP	QTY/ PACK
48-22-3100	Black	Fine Point	1
48-22-3101	Black	Stylus and Fine Point	1
48-22-3102	Black	Medium Point	2
48-22-3103	Black	Chisel	1
48-22-3104	Black	Fine Point	4
48-22-3105	Black	Fine Point	2
48-22-3106	Black	Fine Point	2
48-22-3107	Black, Blue, Brown, Green, Orange, Purple, Red, Yellow	Chisel Point	8
48-22-3109	Black, Blue, Green, Red	Chisel	4
48-22-3130	Black	Chesel	1
48-22-3165	(2) Black, Blue, Red	Fine Point	4
48-22-3150	Black	Ultra Fine	12
48-22-3154	Black	Ultra Fine	4
48-22-3170	Red	Fine Point	1
48-22-3180	Blue	Fine Point	1
48-22-3190	Green	Fine Point	1
48-22-3722	Yellow	Fine Point	1

INKZALL™ Metallic Markers

- Writes on dusty, oily surfaces
- Clog resistant with a durable acrylic nib
- Designed for dark surfaces
- Anti-roll body

PART NO.	COLOR	TIP	QTY/PACK
48-22-3123	Silver, Gold	Fine Point	2
48-22-3121	Silver	Fine Point	2
48-22-3122	Gold	Fine Point	2

INKZALL™ Highlighters

- Durable chisel tip
- Long cap off life
- Bleed and smear resistant
- Quick dry time
- Anti-roll design
- Hard hat clip and lanyard hole

PART NO.	COLOR	QTY/PACK
48-22-3201	Yellow	5
48-22-3206	Blue, Green, Orange, Pink, Yellow	5

INKZALL™ Jobsite Pens

- Bleed and smear resistant
- Long cap off life and quick dry time
- Pocket clip
- ASTM D 4236 certified ink

PART NO.	COLOR	TIP	QTY/PACK
48-22-3160	Black	Ultra Fine	12
48-22-3161	Red	Ultra Fine	12
48-22-3162	Blue	Ultra Fine	12
48-22-3164	Black	Ultra Fine	4

INKZALL™ Liquid Paint Markers

- Writes on dirtiest, hottest, roughest surfaces
- Valve action marker with durable acrylic nib
- Water & UV resistant markings with 10 second dry time
- Marks on surfaces up to 300° F

PART NO.	COLOR	QTY/PACK
48-22-3712	White	1
48-22-3711	White	12
48-22-3721	Yellow	12
48-22-3731	Black	12
48-22-3741	Red	12
48-22-3751	Green	12
48-22-3761	Blue	12
48-22-3771	Orange	12

STANLEY_SUPPLY.indd 122-123

LUMBER CRAYONS/SOAPSTONE/MARKERS

Flat Soapstone

- For temporary marking of metal surfaces during fabrication
- Does not contaminate welds and is easily removable
- 5" x 1/2" x 3/16"
- **Box Qty 144**

PART NO.	DESCRIPTION
70803	Soapstone, 5" x 1/2" x 3/16"
70802	**Flat** Soapstone Holder

Carpenter's Pencils

- Premium quality flat lead for easier marking
- Clean, accurate marks on wood and other surfaces

PART NO.
19972

IRWIN STRAIT-LINE MARKING CRAYON

- **Use on oily, slick, wet, cold, or dry surfaces**
- **For lumber, concrete, ceramics & metal**
- **Non-toxic & waterproof**
- **Color: All**

PART NO.	COLOR
16466406	Yellow
16466401	Red
16466402	Blue
16466404	Black

MARKERS

Forney Window Marker

- **Temporary window marker for use on glass, metal and most other non-porous surfaces**
-

PART NO.	COLOR
70853	White
70854	Black

Forney Paint Markers

- **Multiple colors available in two sizes – regular and x-large**
- **Excellent on metal, coatings, plastic, glass, ceramic and almost any non-porous surfaces**
- **Intense, highly visible, quick drying colors are water and weather resistant**
- **Precision valve regulates paint flow**
- **Medium bullet tip; marking range: -50 degree F to 150 degree F (-46 degree C to 66 degree C**

PART NO.	DESCRIPTION
70818	White
70819	Black
70820	Red
70821	Blue
70822	Yellow
70824	Silver
70825	Orange

RevMark® Industrial Marker

PART NO.	COLOR
RVM-WHITE	White
RVM-RED	Red
RVM-BLACK	Black
RVM-BLUE	Blue

SHARPIE KING SIZE BLACK MARKER

- **Durable & dependable permanent marking tool**
- **Industrial strength**
- **Chisel tip**
- **1 per pack**
- **Color: Black**

PART NO.	DESCRIPTION
65715101	Black

Composite Folding Rule

- Most durable markings and blades
- Heat stamped markings
- Wear and scratch resistant laminate
- Corrosion-free embedded joints
- Imperial scale 78" total length

PART NO.
48-22-3801

Engineer's Composite Folding Rule

- Most durable markings and blades
- Heat stamped markings
- Wear and scratch resistant laminate
- Corrosion-free embedded joints

PART NO.	SIZE
48-22-3802	6.5'

REDSTICK™ Compact Magnetic Box Levels

- SHARPSITE Vial technology - best readability, impact protected
- Guaranteed lifetime accuracy - accurate to .029° (.0005 in./in., 0,5 mm/m)
- Amplified rare earth magnets - maximum holding power
- Wide, durable handles for comfort and portability
- Over-molded, non-slip grips stick to the wall and prevent sliding
- Durable, all-metal hang hole for storage

PART NO.	SIZE
MLCMM24	24"
MLCMM48	48"
MLCMM72	72"
MLCMSM48	24"/48"

REDSTICK™ Compact Box Levels

- ALL-METAL BACKBONE™: Strongest, most durable frame. reinforced vial retention
- SHARPSITE™ vial technology: best readability. impact protected
- Guaranteed lifetime accuracy: accurate to .029° (.0005"/in, 0,5 mm/m)
- Wide, durable handles for comfort and portability
- Overmolded, non-slip grips stick to the wall and prevent sliding
- Durable, all-metal hang hole for storage

PART NO.	SIZE
MLCM24	24"
MLCM48	48"
MLCM72	72"
MLCMS48	24"/48"

12 1/2" Measuring Wheel

- **Innovative design: simple, center-line functionality. Great balance.**
- **Huge numbers make for easy reading. Superior protection and placement of the counter: the metal shelf keeps dirt and debris from coming into contact with the critical counter (5 digits, up to 99,999).**
- **Compact fold-down: easily folds in half for sotrage and portability.**

PART NO.	DESCRIPTION
KESRR318N	Measuring Wheel

Measuring Wheel

- 12" Measuring wheel
- Top handle clearing function
- Top break function
- Wheel debris cleaning flap
- Reinforced locking pivot point
- Zero point indicator
- Kickstand

PART NO.	SIZE
48-22-5012	12"
48-22-5006	6"

STANLEY_SUPPLY.indd 124-125

STANLEY

25' x 1" Tape Rule

- 25' x 1" polymer-coated blade resists abrasion
- High-impact ABS case for durability
- 16" and 19.2" stud center markings simplify framing jobs
- Corrosion-resistant Tru-Zero end hook for accurate measurements

PART NO.	DESCRIPTION
30-455	25' x 1"

STANLEY

3/4" PowerLock® Tape Rule

- Mylar® polyester film extends life of entire blade
- Chrome high-impact ABS case
- Secure blade lock won't creep
- 16" and 19.2" stud center markings simplify framing jobs
- Corrosion-resistant Tru-Zero end hook for accurate measurements

PART NO.	DESCRIPTION
33-116	16' x 3/4"
33-425	25' x 1"
33-835	35' x 1"

STANLEY

FatMax® BladeArmor™ Tape Rules

- 11' blade standout and 1-1/4" wide blade
- BladeArmor™ coating on first 4-1/2"
- Mylar® polyester film
- High-impact ABS case
- Top-forward blade lock
- 16" and 19.2" stud center markings
- Multi-catch hook grabs on top or bottom for versatility
- Three-rivet, corrosion-resistant Tru-Zero end hook

PART NO.	DESCRIPTION
33-730	30' x 1-1/4"
33-735	35' x 1-1/4"
33-725	25' x 1-1/4"

STANLEY

300' x 1/2" PowerWinder® Fiberglass Long Tape

- 3:1 gear drive
- 40 fiberglass strands
- 1/2" wide blade
- 2-sided blade graphics with fractional inch/decimal foot scales for versatility
- Polymer-coated reinforced blade
- Corrosion-resistant Tru-Zero folding end hook for accurate measurements
- Blade bumper helps prevent blade damage

PART NO.	DESCRIPTION
34-762	300' x 1/2"

1/2" Wide Blade

w/ easy-to-read markings

- 2-sided blade graphics with fractional inch/decimal foot scales
- Polymer-coated blade resists abrasion
- High-impact ABS case with durable rubber grip holds up to heavy use
- Corrosion-resistant Tru-Zero folding end hook for accurate measurements

PART NO.	DESCRIPTION
34-790	100' x 1/2"
34-793	200' x 1/2"

STANLEY

Steel Long Tape Rule

- 3/8" wide steel blade
- Polymer-coated blade
- High-impact ABS case
- 16" stud center markings simplify framing jobs
- Easy-wind drum
- End hook recoils neatly into contoured case
- Belt clip

PART NO.	DESCRIPTION
34-103	50' x 3/8"
34-106	100' x 3/8"

GS-LOCKTM WITH SAFETY BELT HOLDER

- **Extra-thick steel generates more stiffness than 1 in (25 mm) standard tape measures**
Thick elastomer case armor extends around the body of the tape measure to protect end hooks and work surfaces

PART NO.	SIZE
GSSF-16BW	16 ft.
GSSF-25BW	25 ft.

PLUMB-RITE® 400GP

- **All-in-one plumb alignment and centering tool**
- **Self-retracting line**
- **Elastomer-wrapped heavy-duty case**
- **Reinforced setting pin head**
- **14 oz / 400 g quick-stabilizing bob**

PART NO.	SIZE
PZB-400GP	14.8 ft (4.5 m)

6/15/24 12:51 PM

Crescent Lufkin 5/8" x 8' Red End Wood Rule with 6" Slide Rule Extension

- Durable construction features brass plated joints and brass End caps to prevent ends from splintering
- Stops at each end to prevent slide from falling out
- Extension allows for accurate inside Measurements
- Marked along both sides and both edge
- Graduated slide rule extends up to 8 feet

PART NO.	DESCRIPTION
LUFX48	8' Ruler

STANLEY

Steel Carpenter's Square

- 24" x 2" body length
- High-quality hardened steel for durability and long life
- Embossed graduations for easy reading on face and back
- Reverse reading scale allows for efficient measuring
- Clear, protective finish resists rust

PART NO.
STN45500



STANLEY

Premium Quick Square® Layout Tool

- Aluminum construction
- Multipurpose tool is ideal for use as a 0° to 90° protractor scale
- Base Length: 10-1/4"
- Rule Length: 6-7/8"
- Works well as a saw guide

PART NO.
STN46071

6" English/Metric Combination Square

- Durably etched, hard-chrome-plated rust-resistant blades
- 6" square has precision-machined working surfaces for improved accuracy
- Built-in scriber
- High-visibility yellow, die-cast handle

PART NO.	DESCRIPTION
JHN406EM	Combo Square

STANLEY

12" Combination Square

- Embossed hard-chrome rust-resistant blade
- Built-in scriber
- Durable, black die-cast metal handle

PART NO.	DESCRIPTION
STN46222	Combo Square

STANLEY

Stud Sensor 300

- **Backlit LCD screen clearly displays all of the sensors readings, even in low light conditions**
- **Wood and metal stud detection through up to 1-1/2 in deep surface material**
- **AC detection identifies live wires up to 2 in deep**

PART NO.	DESCRIPTION
STN77407	Stud Finder

TAJIMA SLANTAngle Meter

- **Simple, one-hand operation with a large thumb-screw positioned on the handle**
- **Big, easy-to-read scales rotate and align using a large bubble vial**
- **Ideal for Civil engineering, construction, plumbing, and more**

PART NO.	DESCRIPTION
SLT-AL200M	ANGLE METER

Post & Pipe Level

Durable molded body

Rugged acrylic vials read plumb and level simultaneously

Reflective backing increases vial visibility

Rubber strap allows hands free use quickly attaches to any post, pole or stringer

PART NO.	DESCRIPTION
JHN175	POST LEVEL

Aluminum Line Level

Durable aluminum hexagonal body

Lightweight construction reduces line sag

Unrestricted hooks allow for easy movement

Use for masonry and landscape and sheet metal work

PART NO.	DESCRIPTION
JHN555	Line Level

DEWALT

330' Laser Distance Measurer

- Calculates area & volume automatic calculations with additional triangular area function
- Integrated inclinometer for use as a digital level to calculate continuous height and indirect horizontal distances
- Indirect height measurement uses Pythagoras to measure distances even when point A and/or point B isn't accessible for linear measurement
- Multifunctional end piece folds at 90° for edge measurements and extends 180° for measurements from corners
- IP65 water/debris resistance

SPECIFICATIONS

Class II Laser

Accuracy:	±1/32"
Operating Range:	330 ft.
Power Supply:	Battery
Screen:	Backlit

PART NO.	DESCRIPTION
DW03101	330' Laser Measurer

DEWALT

165' Laser Distance Measurer

- Calculates area and volume automatic calculations
- Indirect height measurement uses Pythagoras to measure distances even when point A and/or point B isn't accessible for linear measurement
- Memory unit stores last 5 measurements
- 2-line backlit display
- Durable design with over-molded housing, 6 ft. drop tested, and IP65 water/debris resistance

SPECIFICATIONS

Class II Laser

Accuracy:	±1/16"
Operating Range:	165 ft.
Power Supply:	Battery
Screen:	Backlit

PART NO.	DESCRIPTION
DW0165	165' Laser Measurer

DEWALT

65' Laser Distance Meter

- Overmolded housing
- Black back lit LCD screen
- Hanger cord loop
- 3 lines of historical measurement
- Continuous measuring option
- Area calculation
- Volume calculation
- Lightweight design

SPECIFICATIONS

Class II Laser

Accuracy:	±1/8"
Operating Range:	65 ft.
Power Supply:	Battery
Screen:	Backlit

PART NO.	DESCRIPTION
DW065E	65' Laser Meter

Milwaukee

330' Laser Distance Meter

- Simplified user interface
- Backlit color screen
- Side-shot button
- Continuous real-time measurements
- 3-position auto-detecting lever
- IP54
- **Includes:** (3) AAA Batteries and Soft Case

SPECIFICATIONS

Accuracy:	1/16"
Distance Range:	330'
Power Supply:	(3) AAA Alkaline batteries
Screen:	Backlite; color display

PART NO.	DESCRIPTION
48-22-9803	330' Laser Distance Meter

Milwaukee

260' Laser Distance Meter

- 7 measurement functions: length, area, volume, indirect measurement (Pythagoras), and stake-out, timer and horizontal mode
- Universal 1/4" threaded socket
- Simple keypad and interface
- Memory storage of last 20 measurements
- IP54 rating
- **Includes:** 200' Laser Distance Meter, (2) AAA Batteries, Quick Reference Card, Manual and Soft Carrying Case

SPECIFICATIONS

Accuracy:	1/16"
Distance Range:	2" to 200'
Inclination Sensor:	±180°
Power Supply:	(2) AAA Alkaline batteries
Screen:	Backlite; black on white display

PART NO.	DESCRIPTION
2282-20	260' Laser Distance Meter

6/15/24 12:51 PM

Heavy Duty Level Model 196

•Locked Vial System
•Removable Rubber End Caps

Item#	Description	Pack
STB37416	16”	4
STB37424	24”	4
STB37448	48”	4
STB37472	72”	4

Masons Level Model 196-K

•Wide Open Horizontal Vials For Maximum Visibility

Item#	Description
STB36448	48”

TECH Digital Electronic Level

•Two Digital Displays With 5 Modes•Carrying Case Included

Item#	Description	Pack
STB36548	48”	

General Construction Level Set

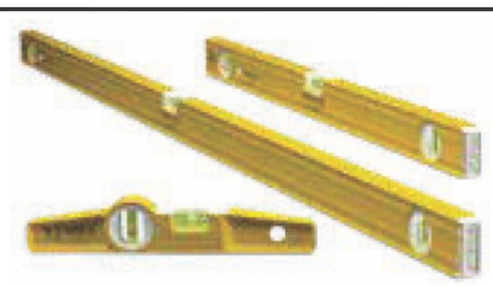

•Includes 48”, 24” & Die-Cast Torpedo

Item#	Description
STB29924	Level Set

Model 81SM Die Cast Torpedo

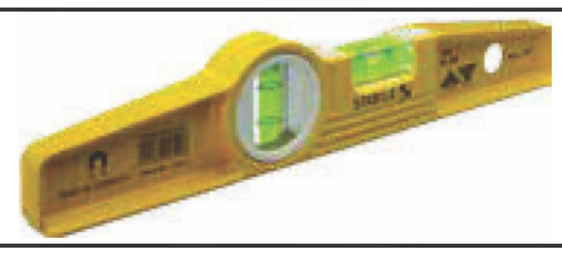

•10” •Magnetic

Item#	Description	Pack
STB25100	Magnetic Torpedo	10

•10” •360 Degree Vial

Item#	Description	Pack
STB25360	360 Degree Torpedo	10

Pocket Pro Magnetic Level

Item#	Description	Pack
STB11901	Magnetic Level	1

Torpedo Level Cases

•Durable Polyester•Carrying Strap

Item#	Description	Pack
STB30015	48”/32”/16”	1
STB30025	78”/48”/32”/24”/16”	1

Magnetic Level Model 96M

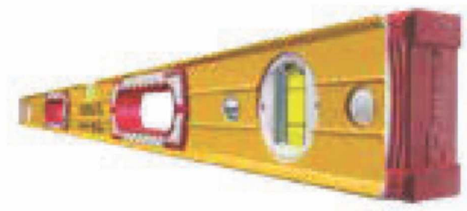

•Magnetic
•Removable Rubber End Caps

Item#	Description	Pack
STB38624	24”	4
STB38648	48”	4
STB38672	72”	4
STB38696	96”	4

48”/16” Level Set Model 196

Item#	Description	Pack
STB37816	Level Set	6

78”/32” Jamber Set

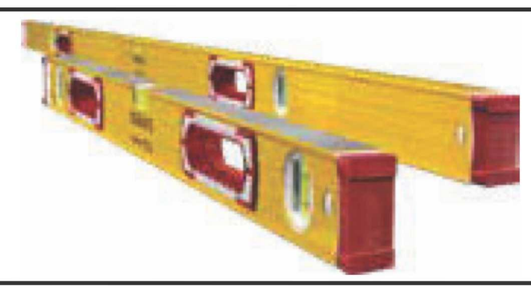

Item#	Description	Pack
STB37532	Jamber Set	2

General Construction Level

•2 Vertical Vials, 1 Horizontal
•Removable End Caps

Item#	Description	Pack
STB29024	24”	1
STB29048	48”	1

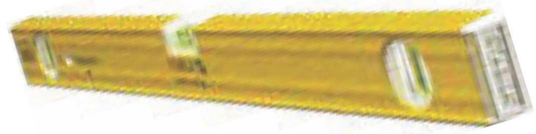

•Magnetic

Item#	Description	Pack
STB29224	24”	1
STB29248	48”	1

VERSION DATE 06-2018 I

DW089LG

12V MAX* 3 x 360 Green Line Laser

INCLUDES: Blow Mold Case, Extended Ceiling Bracket, 12VBattery, Charger, 12v MAX* Green 3 x 360 Line Laser, Target Card, Laser Enhancement Glasses

DW089K

3 Beam Line Laser

INCLUDES: 4 AA batteries for 30 hours of run-time, Ceiling Mount, Kit Box

DW088LG

12V MAX* Green Cross Line Laser

INCLUDES: Blow Mold Case, Extended Ceiling Bracket, 12V Battery, Charger, Green Cross Line Laser, Target Card

DW088K

Cross Line Laser

DW0822

Cross Line and Plumb Spots Laser

DW0822LG

12V MAX* 2 Spot Cross Line Green Laser

INCLUDES: Ceiling Bracket, 12V MAX* Battery, 12V/20V MAX* Charger, Magnetic Enhancement Plate, Enhancement Glasses, Target Card, TSTAK® Case

DW088CG

Green Cross Line Laser

INCLUDES: Ceiling Bracket, (3) AA Batteries

DW083K

3 Beam Laser Pointer

INCLUDES: Kit Box, 4 AA Batteries

6/15/24 12:51 PM

Milwaukee M12

HVAC/R LASER-TEMP GUN™ Kit

- Heavy duty pistol grip infrared thermometer for professional, commercial and industrial applications
- Powered by the Milwaukee M12 Li-Ion battery
- Safely measures temperatures between -22 to 1472° F with up to a 40:1 distance to spot ratio for even the most demanding industrial applications
- Designed with embedded non-contact voltage detection and an extra bright LED floodlight to increase end user productivity
- Infrared surface temperature measurement from -22° F to 1472° F
- 40:1 distance to spot ratio. Measures a one-foot spot from 40 feet away
- Measures ambient humidity and dew point
- Unit memory stores up to 20 temperature values
- **Kit Includes:** Battery, Charger, Test Lead Set, Thermocouple (K-Type), Manual and Carrying Case

SPECIFICATIONS	
Basic Accuracy:	1.50%
Contact Temperature:	-40° F to 1022° F
Data Storage:	20 points
Distance to Spot:	40:1
Emissivity:	Adj. .10

PART NO.	DESCRIPTION
2277-21	12V Li-Ion HVAC/R LASER-TEMP GUN™ Kit
2277-21NST	12V Li-Ion HVAC/R LASER-TEMP GUN™ Kit (NIST)
2277-20	**TOOL ONLY**

Milwaukee M12

12V Li-Ion 160 x 120 Thermal Imager Kit

- Ideal for use by Electrical Contractors, HVAC/R Technicians, Building Inspectors, Energy Auditors and Plant Maintenance teams
- RESNET compliant
- Capture thermal and visual images on each trigger pull for enhanced reporting
- Crisp, high resolution 160x120 pixel thermal images for better definition and clarity
- Complete report software to easily analyze images
- Broader temperature range (-10 to 350° C)
- 3.5" high resolution LCD (640x480 pixel)
- Built-in visual camera and flashlight
- Rugged over molding
- Simple screen layout
- Raised corners protect the LCD and thermal engine if dropped
- Hinged camera style lens cover is always attached
- Knurled focus ring is easy to grip with arc flash PPE
- All Thermal and Visual images use standard JPEG format for use in any program
- Media door seals the included 2GB SD card and USB connections
- **Kit Includes:** 2GB SD Card, 1.5 Ah Battery, Charger, Quick Reference Guide, Software Manual, Thermal Imager Manual, Thermal Imager Report Software and USB Cable and Carrying Case

PART NO.	DESCRIPTION
2260-21	160 x 120 Thermal Imager Kit
2260-21NST	160 x 120 Thermal Imager Kit (NIST)

Voltage Detector w/ LED

- Extra bright LED work light makes working in dark areas easier than ever
- CAT IV 1000V safety rating is safe for all applications including industrial applications
- Green Power On indicator light tells you the voltage detector is working properly before use
- Easy to use rear push button design
- Pocket clip allows for easy storage and retrieval from pocket
- Industry leading non-contact voltage detection technology
- Powered by two easy to replace AAA batteries

SPECIFICATIONS

LED Work Light:	Yes
Indicators:	Audible; Green Light
Safety Category:	CAT IV 1000V
Voltage Range:	50 to 1000V AC

PART NO.	DESCRIPTION
2202-20	Voltage Detector w/ LED
2200-20	Voltage Detector w/o LED

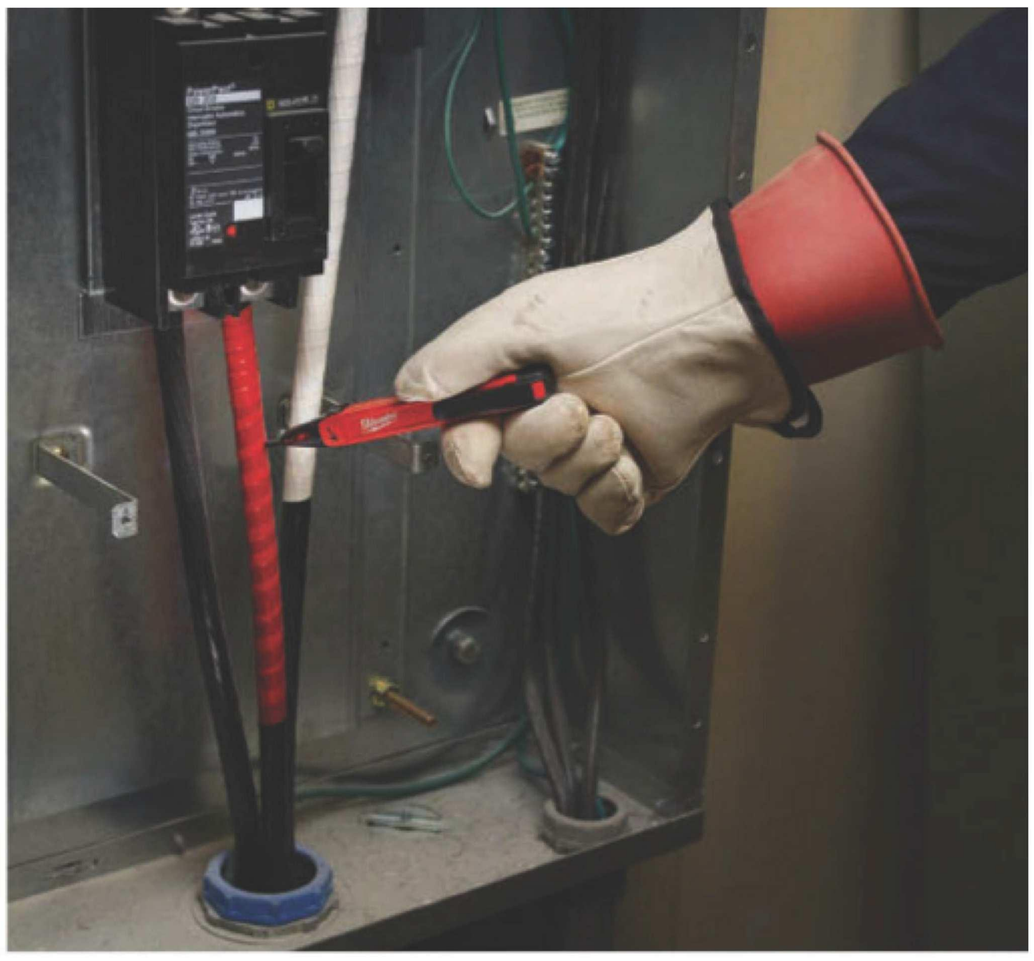

6/15/24 12:51 PM