BITUTHENE®

gcp applied technologies

Post-Applied Above-Grade and Below-Grade Applications

Plaza decks, inverted roofs, green roofs, elevated decks, basement walls, tunnels, metro stations and infrastructure projects. For each of these applications and more, there's a BITUTHENE® product developed by GCP Applied Technologies. Long-lasting, versatile and easy-to-install, the BITUTHENE® post-applied waterproofing system gets the job done.

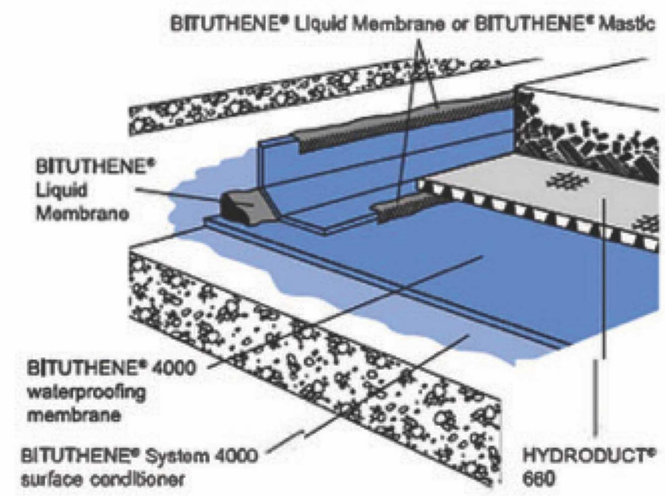

COMPONENTS

BITUTHENE® 3000/4000/Liquid Membrane

Waterproofing Membranes

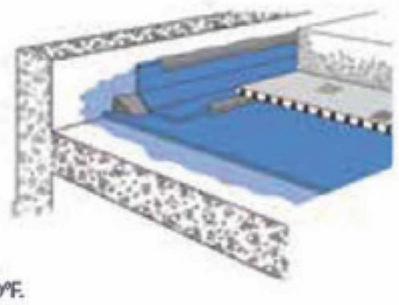

BITUTHENE® 3000 Membrane is a composite sheet of 56 mils of rubberized asphalt and 4 mils of cross-laminate, high-density polyethylene film. These two components combine to offer an extremely tough waterproofing barrier. BITUTHENE® 3000 can be used when temperatures are at 40°F or above.

BITUTHENE® 3000 Low Temperature can be used when surface and ambient temperatures are between 25°F and 60°F.

BITUTHENE® 4000 Membrane system combines the BITUTHENE® 4000 membrane and BITUTHENE® system 4000 Surface Conditioner, which is used to condition all structural concrete, masonry or wood surfaces. Can be used when temperatures are as low as 25°F.

BITUTHENE® Liquid Membrane is a two component, elastomeric, cold applied, trowel grade material. It can be used as a reinforcement material at inside corners, flashing material around drains, protrusions, etc., sealing material at terminations, repair material for defects on concrete surfaces and flashing material at corners. May be applied at temperatures of 25°F or above.

PRODUCT NAME	PRODUCT NO.	SIZE
BITUTHENE® 3000	B3000	36"X66'
BITUTHENE® 4000	B4000	36"X66'
BITUTHENE® LIQUID MEMBRANE	BLM4G	4 GAL

BITUTHENE® Deck Prep

Low viscosity surface treatment used to level and repair rough concrete decks prior to installing BITUTHENE® waterproofing

PRODUCT NO.	SIZE
DECKPREP	4 GAL

BITUTHENE® Adhesive Primer B2 LVC

Specially formulated low VOC primer for use with GCP self-adhered membranes on green concrete or damp substrates

PRODUCT NO.	SIZE
B2LVCSG	5GAL

BITUTHENE® Liquid Membrane

Detailing at pipe entries, etcs

PRODUCT NO.	SIZE
BLM4G	4 GAL

BITUTHENE® Primer WP-3000

Easy-to-use, water-based primer for use with BITUTHENE® membranes and GCP underlayments

PRODUCT NO.	SIZE
13336	5 GAL

BITUTHENE® Mastic

One part gunor trowel applied mastic for sealing Bituthene membrane terminations and details

PRODUCT NO.	SIZE
GBM29OZ	29 OZ
20189	5 GAL

HYDRODUCT® 660

High impact, creep-resistant geocomposite and protection layer

PRODUCT NO.	SIZE
GHD660	4'X50'

Blueskin® WP200 & Blueskin® PreSeal Pre-Applied Wateproofing System

Sheet Membrane for Below-Grade Applications

Blueskin WP200 is a self-adhering, 60 mils thick SBS rubberized membrane ideal for vertical and horizontal waterproofing applications such as foundation walls, planters, retaining walls, terraces and tunnels.

Blueskin PreSeal is a pre-applied, fully and permanently bonded, composite sheet membrane for waterproof construction. The membrane is designed to adhere directly into wet, curing concrete, via an integral mechan and adhesive attachment, to form a permanent barrier against water and vapor

Henry. #1 CHOICE OF PROFESSIONALS.

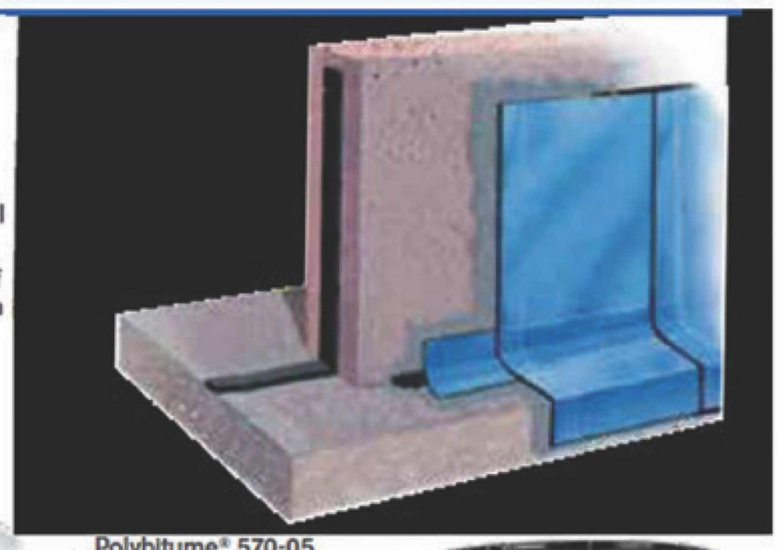

COMPONENTS

Blueskin® WP200 & Blueskin(R) PreSeal™ Pre-Applied

Premium waterproofing membrane for foundation walls, tunnels, planters, retaining walls

PRODUCT NO.	SIZE
HEWP200937	36'X66.7'
BP435772	6.6'X65.6'

Aquatac™ Primer

Emulsion Primer for Self-Adhesive Membranes

PRODUCT NO.	SIZE
HE545623	4.75 GAL

Polybitume® 570-05

Polymer Modified Sealing Compound

PRODUCT NO.	SIZE
57005	29 OZ
HE570733	2.5 GALLON

Blueskin® TWF

Self-Adhesive Thru-Wall Flashing Membrane

PRODUCT NO.	SIZE
H200TW933	36"X75'

Blueskin® Adhesive

Quick drying, rubber-based adhesive

PRODUCT NO.	SIZE
BLUEAD45	4.5 GAL

Henry® 925 BES Sealant

Moisture cure, medium modulus sealant

PRODUCT NO.	SIZE	COLOR	QUANTITY
HE925B284	10OZ	BLACK	24/CASE
HE925G284	10OZ	GRAY	24/CASE
HE925W284	10OZ	WHITE	24/CASE
HEBES925B	28OZ	BLACK	12/CASE
925W283	28OZ	WHITE	12/CASE

STANLEY_SUPPLY.indd 186-187