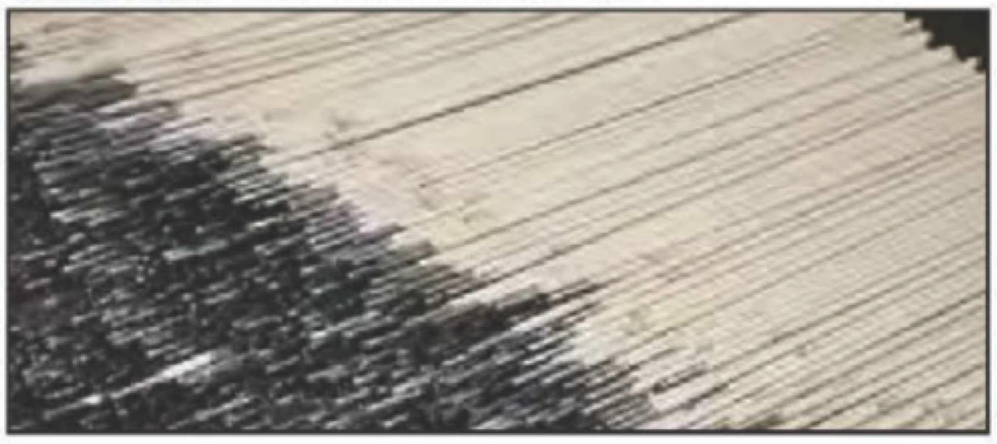

LINCOLN ELECTRIC

AC/DC
Eliminates Arc Blows
Runs On Low Amps

Fleetweld® 180

Fast Freeze, Out-of-Position Mild Steel Stick Electrodes

Got a small AC welder? Here's your electrode! Excellent arc stability for excellent performance with power sources as low as 50V open-circuit voltage (OCV). A great stick electrode with the ability to start easily on low open circuit voltage welders.

Model	AWS Class	Recommended Polarity	Dia. Inches	Package Wt. Lb.
ED033496	E6011	AC, DC+	3/32"	5 lb. Plastic Tube
ED032449	E6011	AC, DC+	1/8"	5 lb. Plastic Tube

LINCOLN ELECTRIC

Great For Spot Welds

Fleetweld® 22

Fast Freeze, Out-of-Position Mild Steel Stick Electrodes

Developed specifically for floor decking and other applications where burn-through spot welding on sheet metal is required. Great for galvanized or plated sheet steel, as well as on steel that is painted or dry.

Model	AWS Class	Recommended Polarity	Dia. Inches	Package Wt. Lb.
ED021896	E6022	DC+, AC	1/8"	50 lb. Box
ED021895	E6022	DC+, AC	5/32"	50 lb. Box

LINCOLN ELECTRIC

Industry Standard For Root Pass Pipe

Fleetweld® 5P+

Fill Freeze, Out-of-Position Pipe Welding Mild Steel & Low Alloy, Steel Stick Electrodes

Ideal for steel that's less than clean. Great for pipe welding and vertical-up and overhead plate welding. A favorite for operators who handle cross-country and in-plant pipe welding.

Model	AWS Class	Recommended Polarity	Dia. Inches	Package Wt. Lb.
ED032565	E6010	DC+	1/8"	10 lb. Can
ED010278	E6010	DC+	1/8"	50 lb. Can

LINCOLN ELECTRIC

Junkyard Rod

Fleetweld® 5P

Fill Freeze, Out-of-Position Pipe Welding Mild Steel & Low Alloy, Steel Stick Electrodes

Great choice for welding on dirty, rusty, greasy or painted steel - especially in vertical or overhead applications.

Model	AWS Class	Recommended Polarity	Dia. Inches	Package Wt. Lb.
ED010211	E6010	DC+	3/32"	50 lb. Can
ED010203	E6010	DC+	1/8"	50 lb. Can
ED010216	E6010	DC+	5/32"	50 lb. Can
ED010207	E6010	DC+	3/16"	50 lb. Can

LINCOLN ELECTRIC

Weathering Steel
Low Temp Welds

Excalibur® 8018-C1 MR

Low Hydrogen, Low Alloy Steel Stick Electrodes

The ideal moisture resistant electrode for welding on equipment and pipe that transports liquid ammonia, propane and other gases. An excellent all position electrode for applications requiring a nominal 2-1/4% nickel deposit.

Item	Model	AWS Class	Recommended Polarity	Dia. Inches	Package Wt. Lb.
	ED030876	E8018-C1 H4R	DC+, AC	3/32"	50 lb. Can
	ED030877	E8018-C1 H4R	DC+, AC	1/8"	50 lb. Can
	ED030879	E8018-C1 H4R	DC+, AC	3/16"	50 lb. Can

LINCOLN ELECTRIC

Great For Shipbuilding

Excalibur® 8018-C3 MR

Low Hydrogen, Low Alloy Steel Stick Electrodes

All position, moisture resistant, low hydrogen, low alloy electrode.

Model	AWS Class	Recommended Polarity	Dia. Inches	Package Wt. Lb.
ED030894	E8018-C3 H4R	DC+, AC	5/32"	50 lb. Can

LINCOLN ELECTRIC

Made For High Strength Steel Welds

Excalibur® 9018M MR

Low Hydrogen, Low Alloy Steel Stick Electrodes

Intended for welding high strength steels of 90,000 psi (620 MPa) tensile strength and higher.

Model	AWS Class	Recommended Polarity	Dia. Inches	Package Wt. Lb.
ED030868	E9018-M H4R	DC+	3/32"	50 lb. Can
ED030869	E9018-M H4R	DC+	1/8"	50 lb. Can
ED030871	E9018-M H4R	DC+	3/16"	50 lb. Can

STANLEY_SUPPLY.indd 232-233