D-Ring Extender 18 in. - Loop

Part #: LE18134L

18 in. 1-3/4" web single leg D-ring extender, loop on one end and large D-ring on opposite end. Meets or Exceeds ANSI Z359.12-20

D-Ring Extender 18 in. - Cable

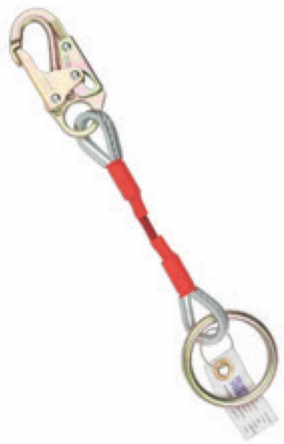

Part #: LE18134LE

18in. D-ring extender with 0.25inch aircraft steel cable. With one forged snap hook & one O ring. Red vinyl coated Lifeline cable tested on a 0.005 radius sharpened steel edge. Meets or exceeds ANSI Z359.14-2012.

D-Ring Extender 18 in.

Part #: LE18134

18 in. D-ring extender, 3/4" snap hook on one end and large D-ring on opposite end. Meets or Exceeds ANSI Z359.12-2009.

Positioning Device Rebar

Part #: A00004

Rebar chain positioning device, one 2-1/4" swivel rebar hook on top and two 3/4" snap hooks on opposite ends. Meets or Exceeds ANSI Z359.3-2007.

Tool Lanyards

T2201 T2203

Part #: T2201 & T2203

Tool Lanyard with Screw Gate Carabiner or Twist Lock Carabiner. 15 lbs. tool rated. Meets or exceeds the ANSI/ISEA 121-2018 standard.

Twin SRD Connector

Part #: SRL169

DUAL LEG SRD CONVERTER - a Carabiner with SRD Plastic Connector. Gate breaking strength 5000 lbs. Meets or Exceeds ANSI Z359.12-2009.

Twin SRD Steel Connector

Part #: SRL170

Dual Leg SRD Converter. Gate Strength 3600 lbs. Min breaking strength 5000 lbs. Meets or Exceeds Ansi Z359.12-2009.

Hook Carabiner .67"

Part #: C111

Steel twist lock, 5/8" gate opening, Gate Strength 3600 lbs. Min breaking strength 5000 lbs. Meets or Exceeds ANSI Z359.12-2009.

Hook Carabiner .84"

Part #: C113

Steel twist lock, 13/16" gate opening, Gate Strength 3600 lbs. Min breaking strength 5000 Exceeds ANSI Z359.12-2009.

6/15/24 12:53 PM