RED HEAD CONCRETE ANCHORING SYSTEMS Dynabolt® Sleeve Anchors

- Versatile, medium-duty expansion anchor featuring a split expansion sleeve over a threaded stud bolt body & integral expander, nut & washer

PART NO.	ANCHOR SIZE	MAX. FIXTURE THICKNESS	MIN. EMBED	QTY/ BOX
Carbon Steel Hex Nut				
HN-1614	5/16" × 1-1/2"	1/4"	1-1/4"	100
HN-3817	3/8" × 1-7/8"	3/8"	1-1/2"	50
HN-3830	3/8" × 3"	1-1/2"	1-1/2"	50
HN-1222	1/2" × 2-1/4"	3/8"	1-7/8"	25
HN-1230	1/2" × 3"	1-1/8"	1-7/8"	25
HN-1240	1/2" × 4"	2-1/8"	1-7/8"	25
HN-5830	5/8" × 3"	1"	2"	25
HN-5842	5/8" × 4-1/4"	2"	2"	10
HN-3424	3/4" × 2-1/2"	1/4"	2-1/4"	10
HN-3440	3/4" × 4"	1-3/4"	2-1/4"	10
Carbon Steel Phillips Flat Head				
FS-3840	3/8" × 4"	2-1/2"	1-1/2"	50
FS-3850	3/8" × 5"	3-1/2"	1-1/2"	50
FS-3860	3/8" × 6"	4-1/2"	1-1/2"	50
Stainless Steel 304 Hex Nut				
SHN-3817	3/8" × 1-7/8"	3/8"	1-1/2"	50
SHN-1222	1/2" × 2-1/4"	3/8"	1-7/8"	25
SHN-1240	1/2" × 4"	2-1/8"	1-7/8"	25
Stainless Steel 304 Phillips Flat Head				
SFS-3826	3/8" × 2-7/8"	1-1/2"	1-1/2"	50
SFS-3840	3/8" × 4"	2-1/2"	1-1/2"	50
Tie Wire				
TW-1614	5/16"	9/32"	1-1/2"	100

Anchor Materials: Zinc Plated Carbon Steel, 304 Stainless Steel

Head Styles: Hex Nut, Acorn Nut, Round Head, Phillips Flat Head, Threshold Flat Head, Tie-wire

Size Range: 1/4" dia. × 5/8" L. to 3/4" dia. × 6-1/2" L.

Suitable Base Materials: Concrete, Block, Brick & Stone

HEAD STYLES

Phillips Flat Head FS



Hex Nut HN



Acorn Nut AN



Threshold Flat Head TH



Round Head RS



Tie WireTW



Hilti® Compareable:
Dynabolt®: Compare to HLC Anchors

RED HEAD CONCRETE ANCHORING SYSTEMS LDT® Screw Anchor

Patented Sawtooth™ threads for easier installation in 5/8" & 3/4" sizes

- Uses ANSI drill bits
- Cuts its own threads into concrete
- Made of hardened carbon steel and zinc plated
- Finished hex washer head with anti-rotation serrations prevents anchor back-out
- Anchor head is stamped with a length identification code
- **Size Range:** 3/8" & 3/4" diameters. 1-3/4" to 6" lengths
- **Suitable Base Materials:** concrete, masonry, block
- Stainless steel anchors are gold-colored while the carbon steel anchors are silver-colored

AVAILABLE USA

Hilti® Compareable:
LDT Anchors: Compare to HUS-H Screw Anchors

COMPARE:

A. 1/2" LDT Anchor
Fast installation
Easily removed
Finished Head

B. 1/2" Adhesive Anchor
5-Step installation
Permanent application
Exposed threads

C. 5/8" Wedge Anchor
Nut & washer assembly
Difficult to remove
Exposed threads

Smaller drill bit size required
LDT anchors specify a smaller & less expensive drill bit than those required with the 1/2" adhesive threaded rod or the 5/8" wedge.

Shallower hole depth required
At 4-1/2" embedment the LDT anchor will give your performance similar to 1/2" adhesive anchor of the same depth or 5/8" wedge anchors at 7" deep.

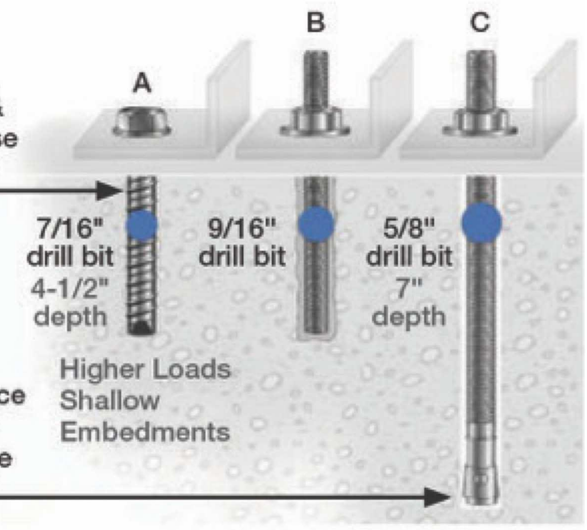

DRILL BIT DIA.	MAX. FIXTURE THICKNESS	SIZE	QTY/ BOX	CARBON STEEL	410 STAINLESS STEEL
5/16"	1/4"	3/8" × 1-3/4"	50	LDT-3816	SLDT-3816
5/16"	1"	3/8' × 2-1/2"	50	LDT-3824	SLDT-3824
5/16"	1-1/2"	3/8" × 3"	50	LDT-3830	SLDT-3830
5/16"	2-1/2"	3/8" × 4"	50	LDT-3840	SLDT-3840
5/16"	3-1/2"	3/8" × 5"	40	LDT-3850	SLDT-3850
7/16"	1"	1/2" × 3"	25	LDT-1230	SLDT-1230
7/16"	2"	1/2" × 4"	25	LDT-1240	SLDT-1240
7/16"	3"	1/2" × 5"	25	LDT-1250	SLDT-1250

DRILL BIT DIA.	MAX. FIXTURE THICKNESS	SIZE	QTY/ BOX	CARBON STEEL	410 STAINLESS STEEL
7/16"	4"	1/2" × 6"	20	LDT-1260	-
1/2"	1/4"	5/8" × 3"	10	LDT-5830	-
1/2"	1-1/4"	5/8" × 4"	10	LDT-5840	-
1/2"	2-1/4"	5/8" × 5"	10	LDT-5850	-
1/2"	3-1/4"	5/8" × 6"	10	LDT-5860	-
5/8"	1-1/4"	3/4" × 4-1/2"	10	LDT-3444	-
5/8"	2-1/4"	3/4" × 5-1/2"	10	LDT-3454	-
5/8"	3"	3/4" × 6-1/4"	10	LDT-3462	-

STANLEY_SUPPLY.indd 24-25