COUNTERSUNK STRAP TIES

SIMPSON Strong-Tie

16 gauge (MSTC28, MSTC40, MSTC52); 14 gauge (MSTC66, MSTC78)

- Use with 16d sinkers
- Zinc galvanized finish containing 0.90 ounces of zinc per square foot of surface area (total both sides)
- Coined edges ensure safer handling

PRODUCT NO.	SIZE
MSTC28	3" X 28-1/4"
MSTC40	3" X 40-1/4"
MSTC52	3" X 52-1/4"
MSTC66	3" X 65-3/4"
MSTC78	3" X 77-3/4"

RPS STRAP TIES

SIMPSON Strong-Tie

Designed to help resist tension loads

- Fasten where plates or soles are cut, at wall intersections or as a ridge tie
- Loads based on minimum member thickness of 4"
- Staggered nail pattern
- Galvanized for extra corrosion resistance
- Install with (12) 16d common nails

PRODUCT NO.	DESCRIPTION
RPS18	RPS18 STRAPTIE
RPS22	RPS22 STRAPTIE

MSTI STRAP TIES

SIMPSON Strong-Tie

12 gauge

- Use with 10d x 1-1/2" fasteners
- Zinc galvanized finish containing 0.90 ounces of zinc per square foot of surface area (total both sides)

PRODUCT NO.	LENGTH
MSTI26	26"
MSTI48	48

BT BRICK TIES

SIMPSON Strong-Tie

Provide a connection between the wood structure and brick facade

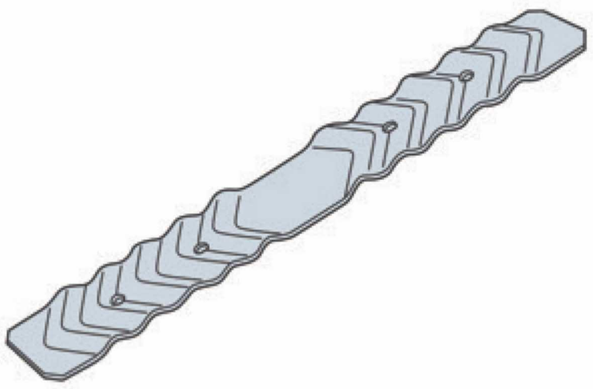

PRODUCT NO.
BT28

MSTCB PRE-BENT STRAPS

SIMPSON Strong-Tie

Designed to transfer tension load from an upper-story shearwall to a beam on the story below

- 14-gauge galvanized steel construction
- ICC-ES ESR-2105 and ESR-2523 compliant

PRODUCT NO.	SIZE
MSTC48B3	3" X 9-1/4"

LIGHT TENSION TIES

SIMPSON Strong-Tie

The entire line of tension ties has been tested and evaluated to the requirements of AC155

- The LTTP2 is designed for wood attachment to concrete or masonry walls. It features features two separate nailing patterns: obround holes spaced 3" apart for I-joist purlins and square holes spaced for the narrow face of 2x solid-sawn purlins
- The LTTI31 is designed for wood chord open web truss attachments to concrete or masonry walls and may also be installed vertically on a minimum 2x6 stud

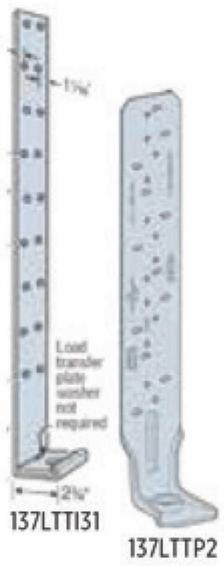

PRODUCT NO.	DESCRIPTION
LTTI31	LTTI31 TENSION TIE
LTTP2	LTTP2 TENSION TIE

RBC ROOF BOUNDARY CLIP

SIMPSON Strong-Tie

Designed to aid installation and transfer shear loads between the roof diaphragm and wall

- The locator tabs make proper location of the clip easy
- Can be used on wood or masonry walls and will handle roof pitches from 0/12 to 12/12



PRODUCT NO.
137RBC

HIGH TENSION TIE

SIMPSON Strong-Tie

11 gauge

- Optimized nailing pattern gives better performance with less deflection
- Resists tension loads fastened with nails
- 7/16" Seat thickness and 5/8" anchor bolt diameter
- Use with 10d x 1-1/2" or 16d x 2-1/2" fasteners

PRODUCT NO.	SIZE
HTT5	2-1/2" W X 12-3/8" L X 1-3/8" CL
HTT4	2-1/2" W X 16" L X 1-3/8" CL

STRAP TIE HOLDOWN

SIMPSON Strong-Tie

Embedded strap-tie holdown offering high-load capacity and a staggered nail pattern to help minimize splitting

- The nailing pattern allows for nailing to the edges of double 2x
- Strap nail slots are countersunk to provide a lower nail head profile
- The slots below the embedment line enable increased front-to-back concrete bond and help to reduce spalling
- Rim joist models accommodate up to a 17" clear span without any loss of strap nailing

PRODUCT NO.	DESCRIPTION
LSTHD8	18-5/8" STANDARD (NEW)
STHD10	24-5/8" STANDARD
STHD14	26-1/8" STANDARD
STHD10RJ	24-5/8" RIM JOIST
STHD14RJ	24-5/8" RIM JOIST

ST STRAP TIES

SIMPSON Strong-Tie

1-1/4" x 21-5/8"

- 16 gauge
- Use with 16d fasteners
- Zinc galvanized finish containing 0.90 ounces of zinc per square foot of surface area (total both sides)
- Straps are designed to transfer tension loads in a wide variety of applications

PRODUCT NO.
ST22

STANLEY_SUPPLY.indd 68-69