ACETONE

Powerful thinning and clean-up solvent

- Use with resins, epoxies, adhesives, fiberglass, and lacquers
- Fast drying, no residue

PRODUCT NO.	SIZE
45801825	1 GALLON

PAINT THINNER VOC COMPLIANT

Thins oil-based paints, stains, and varnishes

- Cleans brushes and equipment after painting
- CARB compliant
- 1 gallon

PRODUCT NO.
37032101

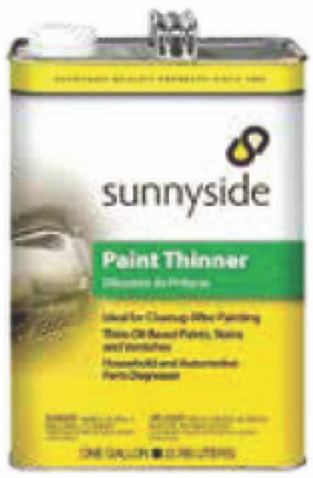

MURIATIC ACID

Used for cleaning and preparing concrete prior to etching, coating and sealing

- Cleans and prepares concrete prior to coating and sealing
- Etches concrete
- Lowers pH in pools and spas

PRODUCT NO.	SIZE
71300056	1 GAL.

DENATURED ALCOHOL

High grade fuel for alcohol burning chafing dishes and marine stoves

- 1 gallon

PRODUCT NO.
45802625

⚠ WARNING ⚠

This product can expose you to Methanol, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to ***www.P65Warnings.ca.gov.***

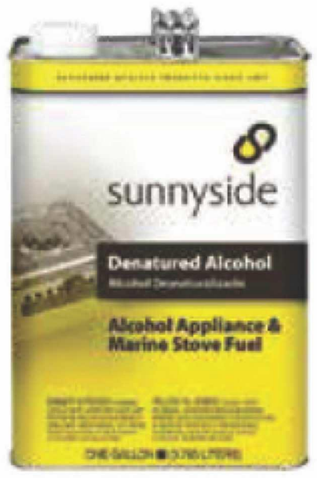

XYLOL

Thins anti-rust, porch and deck paints, excellent solvent for cleaning tools

- Cleans up paint equipment immediately after use
- Medium-fast evaporating
- 1 gallon

PRODUCT NO.
45802425

⚠ WARNING ⚠

This product can expose you to chemicals including Ethylbenzene, which is known to the State of California to cause cancer, and Toluene, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to ***www.P65Warnings.ca.gov.***

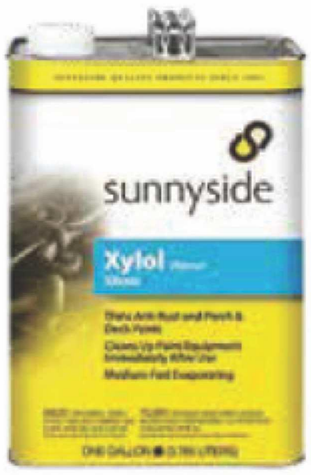

ISOPROPYL ALCOHOL 99%

Industrial cleaning solvent and fuel additive

- Fast evaporating
- 1 gallon

PRODUCT NO.
IPAG

LACQUER THINNER

General purpose

- Thins lacquers and epoxies
- Cleans tools and equipment
- Professional strength

PRODUCT NO.	DESCRIPTION
4517025	1 GAL. REGULAR

⚠ WARNING ⚠

This product can expose you to chemicals including Ethylbenzene, which is known to the State of California to cause cancer, and Toluene, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to ***www.P65Warnings.ca.gov.***

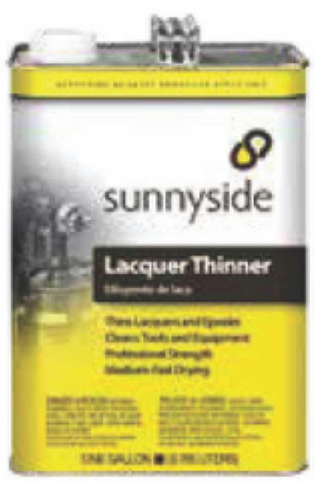

LOW ODOR MINERAL SPIRITS

Premium alternative to paint thinner

- Ideal for clean-up after painting
- Thins oil-based paints, stains, and varnishes
- Household and automotive parts degreaser
- 1 gallon

PRODUCT NO.
45894006

⚠ WARNING ⚠

This product can expose you to chemicals including Benzene, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to ***www.P65Warnings.ca.gov.***

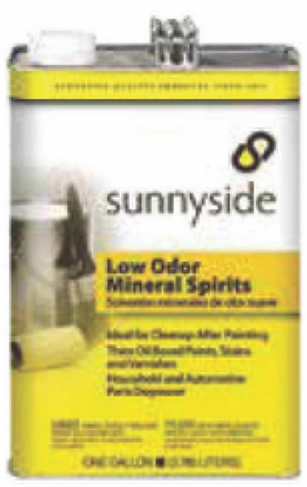

6/15/24 12:51 PM

BITUTHENE®

gcp applied technologies

Post-Applied Above-Grade and Below-Grade Applications

Plaza decks, inverted roofs, green roofs, elevated decks, basement walls, tunnels, metro stations and infrastructure projects. For each of these applications and more, there's a BITUTHENE® product developed by GCP Applied Technologies. Long-lasting, versatile and easy-to-install, the BITUTHENE® post-applied waterproofing system gets the job done.

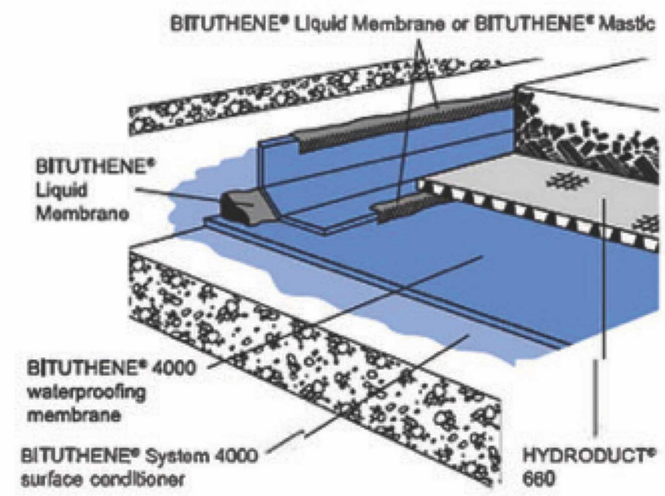

COMPONENTS

BITUTHENE® 3000/4000/Liquid Membrane

Waterproofing Membranes

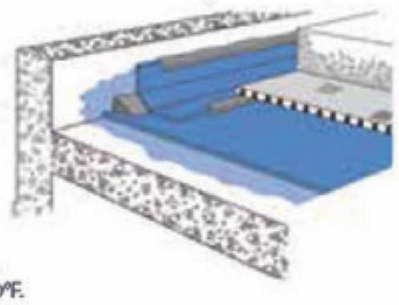

BITUTHENE® 3000 Membrane is a composite sheet of 56 mils of rubberized asphalt and 4 mils of cross-laminate, high-density polyethylene film. These two components combine to offer an extremely tough waterproofing barrier. BITUTHENE® 3000 can be used when temperatures are at 40°F or above.

BITUTHENE® 3000 Low Temperature can be used when surface and ambient temperatures are between 25°F and 60°F.

BITUTHENE® 4000 Membrane system combines the BITUTHENE® 4000 membrane and BITUTHENE® system 4000 Surface Conditioner, which is used to condition all structural concrete, masonry or wood surfaces. Can be used when temperatures are as low as 25°F.

BITUTHENE® Liquid Membrane is a two component, elastomeric, cold applied, trowel grade material. It can be used as a reinforcement material at inside corners, flashing material around drains, protrusions, etc., sealing material at terminations, repair material for defects on concrete surfaces and flashing material at corners. May be applied at temperatures of 25°F or above.

PRODUCT NAME	PRODUCT NO.	SIZE
BITUTHENE® 3000	B3000	36"X66'
BITUTHENE® 4000	B4000	36"X66'
BITUTHENE® LIQUID MEMBRANE	BLM4G	4 GAL

BITUTHENE® Deck Prep

Low viscosity surface treatment used to level and repair rough concrete decks prior to installing BITUTHENE® waterproofing

PRODUCT NO.	SIZE
DECKPREP	4 GAL

BITUTHENE® Adhesive Primer B2 LVC

Specially formulated low VOC primer for use with GCP self-adhered membranes on green concrete or damp substrates

PRODUCT NO.	SIZE
B2LVCSG	5GAL

BITUTHENE® Liquid Membrane

Detailing at pipe entries, etcs

PRODUCT NO.	SIZE
BLM4G	4 GAL

BITUTHENE® Primer WP-3000

Easy-to-use, water-based primer for use with BITUTHENE® membranes and GCP underlayments

PRODUCT NO.	SIZE
13336	5 GAL

BITUTHENE® Mastic

One part gunor trowel applied mastic for sealing Bituthene membrane terminations and details

PRODUCT NO.	SIZE
GBM29OZ	29 OZ
20189	5 GAL

HYDRODUCT® 660

High impact, creep-resistant geocomposite and protection layer

PRODUCT NO.	SIZE
GHD660	4'X50'

Blueskin® WP200 & Blueskin® PreSeal Pre-Applied Wateproofing System

Sheet Membrane for Below-Grade Applications

Blueskin WP200 is a self-adhering, 60 mils thick SBS rubberized membrane ideal for vertical and horizontal waterproofing applications such as foundation walls, planters, retaining walls, terraces and tunnels.

Blueskin PreSeal is a pre-applied, fully and permanently bonded, composite sheet membrane for waterproof construction. The membrane is designed to adhere directly into wet, curing concrete, via an integral mechan and adhesive attachment, to form a permanent barrier against water and vapor

Henry. #1 CHOICE OF PROFESSIONALS.

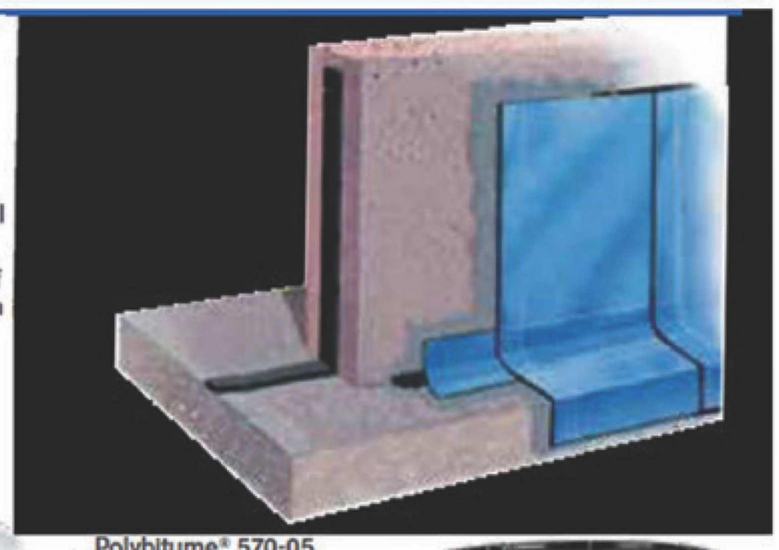

COMPONENTS

Blueskin® WP200 & Blueskin(R) PreSeal™ Pre-Applied

Premium waterproofing membrane for foundation walls, tunnels, planters, retaining walls

PRODUCT NO.	SIZE
HEWP200937	36'X66.7'
BP435772	6.6'X65.6'

Aquatac™ Primer

Emulsion Primer for Self-Adhesive Membranes

PRODUCT NO.	SIZE
HE545623	4.75 GAL

Polybitume® 570-05

Polymer Modified Sealing Compound

PRODUCT NO.	SIZE
57005	29 OZ
HE570733	2.5 GALLON

Blueskin® TWF

Self-Adhesive Thru-Wall Flashing Membrane

PRODUCT NO.	SIZE
H200TW933	36"X75'

Blueskin® Adhesive

Quick drying, rubber-based adhesive

PRODUCT NO.	SIZE
BLUEAD45	4.5 GAL

Henry® 925 BES Sealant

Moisture cure, medium modulus sealant

PRODUCT NO.	SIZE	COLOR	QUANTITY
HE925B284	10OZ	BLACK	24/CASE
HE925G284	10OZ	GRAY	24/CASE
HE925W284	10OZ	WHITE	24/CASE
HEBES925B	28OZ	BLACK	12/CASE
925W283	28OZ	WHITE	12/CASE

STANLEY_SUPPLY.indd 186-187



Loctite PL 400 VOC Compliant Subfloor & Deck Adhesive

- For all heavy-duty interior or exterior construction
- Bonds dry, wet, frozen and treated lumber to most b uilding materials
- Strong, fast set
- VOC compliant

PART NO.	DESCRIPTION
56668972	10 oz. tube
56668903	28 oz. tube

LOCTITE PL200 VOC CONSTRUCTION ADHESIVE LATEX WHITE

- Formulated for use on drywall, wood paneling and wood or metal studs
- Water based
- Low odor
- Bonds to most building materialsPaintable and water resistant
- Water clean up

PART NO.	DESCRIPTION
56668646	10 oz.
56668648	28 oz.

Liquid Nails

- Will not attack foam insulation
- No harmful fumes
- Water cleanup
- VOC compliant

PART NO.	DESCRIPTION
49607705	Liquid Nails - 10.5 fl. oz.

3M

Super 77™ Multi-Purpose Spray Adhesive

- Finger-touch, targeted control
- Low soak-in for high coverage and strong, long-lasting bond
- High initial grab and aggressive tack
- Bonds quickly in 15 seconds
- Low viscosity formula stays in place with little to no run or migration

PART NO.	DESCRIPTION
49492157	Multi-Purpose Spray Adhesive

3M 90 14.6 OZ HI-STRENGTH 90 SPRAY ADHESIVE

- High contact bond strength
- One-minute dry time
- High temperature resistance
- Non-misting, precise spray control

PART NO.	DESCRIPTION
49492159	14.6 OZ HI-STRENGTH 90 SPRAY ADHESIVE

OSI Quad Max White Elastomeric Polymers Door Siding and Window Sealant 9.5 oz

- Apply in temperature range of 0°F-140°F
- Will not shrink as it cures
- Resists damage from UV exposure
- Does not collect dust and dirt
- Fast 24-hour cure and paintable in 1 hour
- Resistant to bubbling
- GreenGuard® certified

PART NO.	DESCRIPTION
78000	Clear 9 oz Tube
78001	White 9.5 oz Tube

Loctite Power Grab Ultimate Construction Adhesive, Versatile High Strength- 9 fl oz

- Strong and Versatile: Works in all conditions and on most materials, including wet surfaces and can even bond two non-porous surfaces
- Professional Choice: High-quality, easy-to-use construction adhesive for bonding most common construction materials such as wood, plywood, MDF, tile, and more
- Tough Against Weather: Strong adhesion with no shrinkage that's waterproof and resistant against extreme temperatures from 40°F to 104°F for interior and exterior project

PART NO.	DESCRIPTION
76415	Power Grab Ultimate 9 oz Tube

6/15/24 12:52 PM

PERMATEX® ANTI-SEIZE LUBRICANT, 4 OZ

: -60°F to 1600°F
(-51°C to 871°C)

PART NO.	DESC.
76762	4 oz.

WD-40 Lubricant

- Formulated for ultra high surface attraction to metal
- Provides rust and corrosion protection
- Cleans dirt, grime, grease and oil
- Silicone-free, leaves no messy residue

PART NO.	DESCRIPTION
77049000	3 oz. aerosol, 24/cs
77090026	8 oz. aerosol, 12/cs
77049004	11 oz. aerosol, 12/cs
77049019	14 oz. aerosol, 6/cs
77049011	1 gal. refill WG94

TRIGGERFOAM™

DEWALT ENGINEERED BY Powers

Powerfoam™ / TriggerFoam™ Pro

- Expanding polyurethane foam
- One-part polyurethane expanding foams
- Exceptional ability to bond allows Powerfoam and TriggerFoam to be applied to various building elements including the surfaces of concrete, brick, block, wood, steel, aluminum and other metals
- Neutral odor

PART NO.	DESCRIPTION
08130N-PWR	Powerfoam™, 12 oz.
08132N-PWR	Powerfoam™, 29 oz.
08136N-PWR	TriggerFoam™ Pro Standard Formula
08133P-PWR	TriggerFoam™ Pro Fire Block Formula
08134P-PWR	TriggerFoam™ Pro Door/Window Formula
08135P-PWR	TriggerFoam™ Pro All Season Formula

DEWALT ENGINEERED BY Powers

TriggerFoam™ Accessories

PART NO.	DESCRIPTION
08139-PWR	TriggerFoam™ Plastic Gun
08128-PWR	TriggerFoam™ Metal Gun
08147-PWR	TriggerFoam™ Cleaner 17 oz.

MRO Solutions

ANAEROBIC THREADLOCKERS

Made in the U.S.A

MRO Solution 10 – MEDIUM STRENGTH BLUE THREADLOCKER
MEDIUM STRENGTH BLUE THREADLOCKER - Removable general purpose threadlocker for locking/sealing fasteners. May be disassembled with hand tools. Meets MIL-S- 46163A TYPE II GRADE N.

MRO Solution 11 – HIGH STRENGTH RED THREADLOCKER
HIGH STRENGTH RED THREADLOCKER - Permanent threadlocker for locking and sealing fasteners up to 1" in diameter. Disassembly will be difficult. Meets MIL-S-46163A TYPE GRADE K.

PART NO.	DESCRIPTION
40101	Blue 50ml Bottle
40104	Red 50ml Bottle

Permatex® Threadlocker

- Works on all metals
- Permits disassembly with hand tools

PART NO.	DESCRIPTION
59324206	2.5 ml Bottle Blue threadlocker
59327100	6 ml Tube Red threadlocker

MRO Solution 14 – HIGH STRENGTH/VISCOSITY RED THREADLOCKER

HIGH STRENGTH RED THREADLOCKER - Permanent threadlocker for locking and sealing fasteners greater than 1" in diameter. Disassembly will be difficult. Meets MIL-S-46163A, Type I, Grade L.

PART NO.	DESCRIPTION
40113	HS Red 50 ml Bottle Threadlocker

STANLEY_SUPPLY.indd 188-189