
Multi Abutment

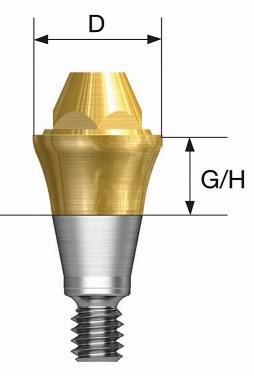

Fixture Level

Features

- Uses specialized outer driver
- Used in screw type prostheses for multiple cases
- Prostheses is fabriacted with aesthetic-low cylinders
- Recommended tightening torque : 30Ncm

Mini Hex Connections					
DIAMETER	4.8	4.8	4.8	4.8	4.8
GH	1.0	2.0	3.0	4.0	5.0
REFERENCE CODE	MTA501M	MTA502M	МТА503М	MTA504M	МТА505М

Regular Hex Connections					
DIAMETER	4.8	4.8	4.8	4.8	4.8
GH	1.0	2.0	3.0	4.0	5.0
REFERENCE CODE	MTA501	MTA502	MTA503	MTA504	MTA505