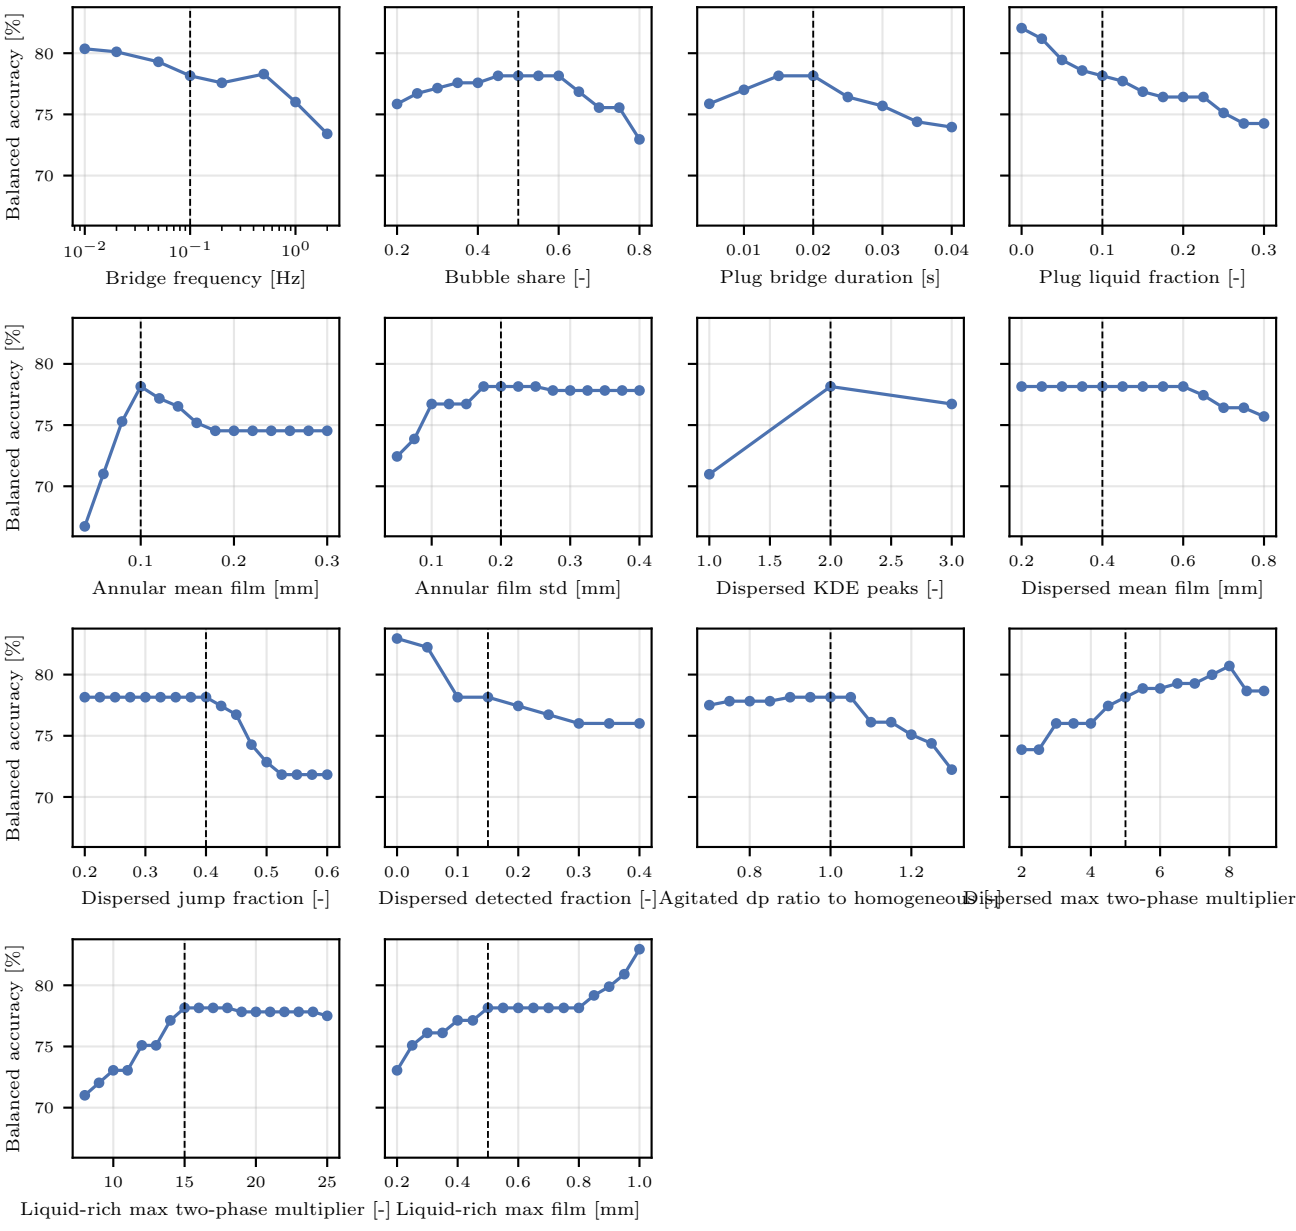

Balanced accuracy [%]
80
75
70
10^{-2}
10^{-1}
10^{0}
Bridge frequency [Hz]
0.2
0.4
0.6
0.8
Bubble share [-]
0.01
0.02
0.03
0.04
Plug bridge duration [s]
0.0
0.1
0.2
0.3
Plug liquid fraction [-]
Annular mean film [mm]
Annular film std [mm]
1.0
1.5
2.0
2.5
3.0
Dispersed KDE peaks [-]
Dispersed mean film [mm]
Dispersed jump fraction [-]
Dispersed detected fraction [-]
Agitated dp ratio to homogeneous [-]
Dispersed max two-phase multiplier
10
15
20
25
Liquid-rich max two-phase multiplier [-]
Liquid-rich max film [mm]