

El títol de la tesi: Obligatori

El subtítol de la tesi: Opcional

Autor: Obligatori

TESI DOCTORAL UPF / ANY L'any de la tesi: Obligatori

DIRECTOR DE LA TESI

Director: Obligatori Departament Departament: Obligatori



Escriviu aquí la vostra dedicatòria

Acknowledgments This work was partially supported by the European Commission through the project Commons for Europe (CIP-ICT-PSP-2011-5-297191)

Abstract

This is the abstract of the thesis in English. Please, use less than 150 words.

Resum

Vet aquí el resum de la tesi en català. Si us plau, utilitzeu menys de 150 paraules.

Prefaci

Contents

List of figures	xiii
List of tables	xv
List of Abbreviations	xvii
1 INTRODUCTION	1
2 STATE OF THE ART	3
2.1 Mesh and MANET networks	3
2.1.1 Definition and properties	3
2.1.2 Operating modes	5
2.1.3 MANET Networks	6
2.2 Open Mobile Ad-Hoc Network (MANET) Networks in Barcelona	7
2.2.1 Funding scheme in Barcelona's MANET networks	7
2.2.2 The Kind of hardware in Barcelona's MANET networks .	8
2.2.3 The Firmware used in Barcelona's MANET networks . . .	8
2.3 Quick Mesh Project (QMP) firmware basics	9
2.3.1 Main Features	9
2.3.2 Quick Deployments	9
2.3.3 Addressing	10
2.3.4 Operating modes	10
2.3.5 Dynamic Routing Protocol (DRP)	11
2.3.6 BatMan-eXperimental version 6 (BMX6)	12
3 CONTRIBUTION	15
3.1 Mobile Node Project	15
3.2 New node in Poblenou Mesh	17
3.2.1 Choice of Hardware	17
3.2.2 Lab Testbed	18
3.2.3 Physical installation of the Rocket M5	21

3.3	Mobile Node Android Application	26
3.3.1	Server side	26
4	RESULTS	31
5	CONCLUSIONS	33
6	FUTURE WORK	35
7	APPENDIXES	39
.1	Appendix 1: Pilot Charter	39
.2	Appendix 2: Documentation	42
.3	Appendix 3: QMP Presentation	64

List of Figures

2.1	Wireless Mesh Network Example	4
2.2	Infrastructure Mode BSS	5
2.3	Ad-Hoc Mode BSS	6
2.4	QMP Addressing	10
2.5	QMP Operating Modes	11
3.1	Rocket M5	18
3.2	Airmax 5G-17-90	18
3.3	First testing mesh	19
3.4	First testing mesh with gateway	20
3.5	First testing mesh with gateway and clients	20
3.6	Rocket M5 installed on the roof of Roc Boronat Building (1)	21
3.7	Rocket M5 installed on the roof of Roc Boronat Building (2)	22
3.8	Rocket M5 connected to the Switch	23
3.9	Poblenou Mesh nodes	24
3.10	Poblenou Mesh nodes distribution	24
3.11	Poblenou Mesh announced links	25
3.12	App Options Screen	29
3.13	App Main layout screen	29
3.14	App Main layout screen with camera on	29

List of Tables

2.1	BMX6 Frames	13
3.1	Server Side Use Case 1	26
3.2	Server Side Use Case 2	27
3.3	Server Side Use Case 3	28

List of Abbreviations

WMN Wireless Mesh Networks

AP Access Point

BSS Basic Service Set

MANET Mobile Ad-Hoc Network

GSF Gracia Sense fils

QMP Quick Mesh Project

NAT Network Address Translation

BMX6 BatMan-eXperimental version 6

OLSR6 Optimized Linked State Routing version 6

DRP Dynamic Routing Protocol

IID Internal IDentifier

WAN Wide Area Network

PoE Power over Ethernet

LAN Local Area Network

Chapter 1

INTRODUCTION

TODO

Chapter 2

STATE OF THE ART

This project consists on studying how are, currently, being build the open mesh networks in cities and what mechanisms we have to contribute or improve them. There are many different ways to improve this networks, namely, we can use different hardware, different software, build applications which run over them, etc.

First of all, we will analyze how these networks are, and how are they operating to have a better idea of what we want to improve.

2.1 Mesh and MANET networks

2.1.1 Definition and properties

When we talk about mesh networks, we refer to networks where all the participant are also routers. If we had to set a single definition the following can be a good one:

”A Mesh network is one where all nodes (participants) are routers, meaning that all the nodes accept and forward packets from other nodes according to the routing rules.” [Escrich, 2012a]

More specifically, we want to talk about Wireless Mesh Networks (WMN) which may refer also to the users of the network, and can be defined as follows:

”Wireless mesh networks often consist of mesh clients, mesh routers and gateways. The mesh clients are often laptops, cell phones and other wireless devices while the mesh routers forward traffic to and from the gateways which may but need not connect to the Internet.” [Huynh,]

To summarize, we have that mesh networks are basically networks which are not defined by the topology (physical layer) or the kind of links between two nodes (link layer). They are defined by the way the nodes operate among them, there are not master/slave or node/supernode distinctions and so, all the nodes have a similar function. In addition, the clients (end users) do not notice any difference (between mesh or other kind of networks) when they connect to the mesh, they are totally transparent for them.

As mentioned above, there are only two different kind of nodes: mesh routers and mesh gateways. They operate in exactly the same way when they have to route packets within the network, the only difference is that the gateways may be connected to a wider network, namely, the Internet and they can route packets to this other network. So, mesh routers just route packets inside the mesh while mesh gateways can also route packets to the outside.

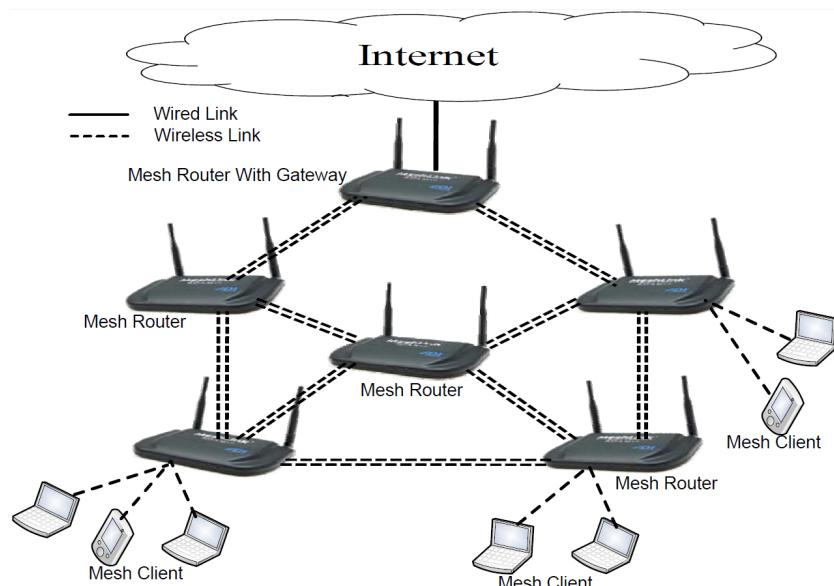


Figure 2.1: Wireless Mesh Network Example

<http://www.intechopen.com/source/html/37888/media/wmn11.jpg>

Then, we can say that WMN are a subtype of mesh networks. They have all the properties of these networks with the only difference that all the nodes are connected wirelessly.

2.1.2 Operating modes

Mesh networks can operate in two different modes: Infrastructure mode and Ad-Hoc mode.

- **Infrastructure Mode:** In this mode we have a central point named Access Point (AP) that creates a Basic Service Set (BSS) zone in which all the packets have to go through the AP. This zone is identified by the MAC address of the AP, which is called BSSID in this context. Furthermore, we can say that a master/slave model is followed in infrastructure mode.

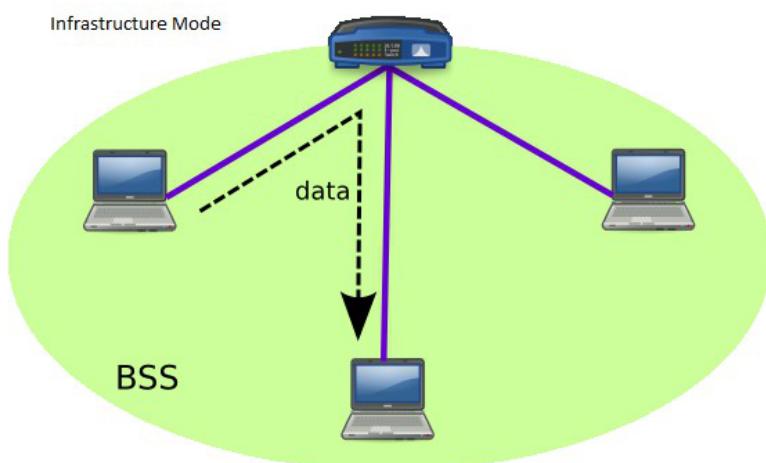


Figure 2.2: Infrastructure Mode BSS

[Escrich, 2012b]

- **Ad-Hoc Mode:** In Ad-Hoc mode, all the participants play the same role. Therefore, every single node connects with all the nodes it can, and so the central point idea disappears. To identify which participants are in the same network we just need to find those who have the same BSSID. At this point, all the machines directly connected can exchange information but, a layer 3 routing protocol is required to allow the communication between nodes which are not connected directly.

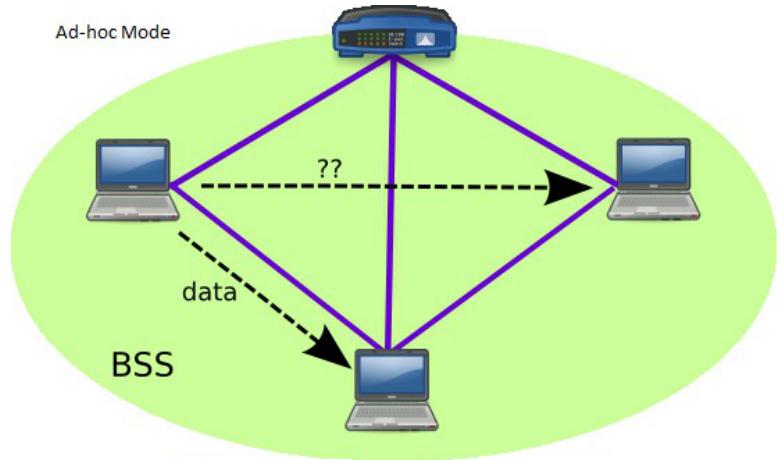


Figure 2.3: Ad-Hoc Mode BSS

[Escrich, 2012b]

2.1.3 MANET Networks

MANET is a subtype of a mesh network. That is to say, when we have a mesh network which uses a wireless system to interconnect the nodes and is built in Ad-hoc mode, we talk about MANET. Another way to define it can be: A MANET network is a WMN which operates in Ad-Hoc mode.

Usually, when we talk about MANET we are also referring to networks which have a self-configuring property. This property relies on the fact that the routers within the network are free-to-move anytime and to anywhere. A good definition could be this:

”A Mobile Ad hoc NETwork (MANET) is a kind of wireless ad-hoc network, and is a self-configuring network of mobile routers (and associated hosts) con-

nected by wireless links - the union of which forms an arbitrary topology.”[Ramesh et al., 2010]

2.2 Open MANET Networks in Barcelona

Nowadays, in Barcelona (and in some other cities) some MANET networks are being deployed. We will study this case in particular because is the one we are more familiar with. In general terms, all the deployments work in the same manner and so, studying one single case can give us a general idea of all of them.

Normally, all these deployments only differ in some points, these are the more relevant ones:

- The funding scheme
- The kind of hardware
- The firmware used

2.2.1 Funding scheme in Barcelona’s MANET networks

There are some examples of MANET networks successfully deployed in Barcelona:

- Gràcia
- Sants
- Poble Nou
- Sant Joan Despí

All these networks have been deployed using the same funding scheme, promoted by the Guifi.net foundation, and is, somehow, based on crowd-funding. Basically, anyone can install a new node and join to the mesh. There is just one restriction: you have to have direct vision with, at least, another node in the network. If you achieve this requirement, you can buy and install the node yourself and you expand the network. So, this is crowd-funding because every person joining the network funds its own equipment, which has the only requirement of being compatible with the firmware used. Since many people has no experience on installing and configuring the nodes, and despite the fact that both the hardware and software are specially designed to allow non-technical people to use it without problems, the foundation provides technical support for those who do not achieve in the installation.

2.2.2 The Kind of hardware in Barcelona's MANET networks

Being that the users are the owners of the network and so, the people who buy the equipment, usually low-cost hardware is used. Low-cost does not mean, low-quality, in fact some of the hardware used have very high features and a very good performance. Normally, the hardware used is from Ubiquity Networks (NanoStation, Rocket, Bullet, etc.), but it is not strictly necessary. Actually, any hardware compatible with the linux distribution openWRT is accepted.

There are more information about some of this devices in Appendix 2.

2.2.3 The Firmware used in Barcelona's MANET networks

This is maybe the most important difference between all the deployments around the world. In most of them, there is a common point: all the firmwares are open-WRT based, but they have some differences. Particularly, in Barcelona the first deployments used the Gracia Sense fils (GSF) firmware, developed since 2003 for the Gracia Sense Fils Wireless Community¹. Some year later, the firmware became outdated since the protocol versions where old and the configuration of the nodes was hard. Then, they decided to create a new firmware with bigger scope, they named it QMP and is the one being used currently (some nodes have to be migrated to QMP yet).

QMP has been chosen in Barcelona because is a firmware that covers perfectly the needs in the deployments carried out there, and has been developed by themselves. Nowadays, in most of the deployments a new firmware is designed specially for them, and despite the fact that many of them could be used in other deployments, it does not normally happen. It is not an efficient way to work, and because of it a new initiative has just started, it is called "libre-mesh"². This initiative tries to build a new firmware based on three existent ones: QMP (Spain), AlterMesh (Argentina) and eigenNet (Italy). It can be a good opportunity to merge all the best points of every firmware a create a new version that fits in many different scenarios.

¹More information at: <http://graciasensefils.net/>

²More information at: <http://libre-mesh.org/>

2.3 QMP firmware basics

2.3.1 Main Features

QMP³ is an Operating System designed for embedded devices, a firmware. The main features of this firmware are:

- OpenWRT based
- 802.11a/b/g/n support
- IPv6 native
- IPv4 tunneled over IPv6
- Auto configuration system
- Web GUI to monitor and configure
- Visualization tools (maps, graphs, etc.)
- Automatic dynamic routing (zero-conf)
- BGP (Border Gateway Protocol) support
- Open Source

2.3.2 Quick Deployments

QMP has been specially designed and developed to achieve quick network deployments. To do so, they have created the auto configuration feature which plays a very important role within the firmware. When we talk about quick deployments, we mean that we have to accomplish these requirements:

- The deployment must be performed as fast as possible.
- It must be able to be done by non-technical people.
- It must be possible in most situations.

³<http://qmp.cat>

2.3.3 Addressing

QMP uses three different kind of IP addresses:

- IPv6 ULA: IPv6 private range to be used internally in the mesh. These IPs are used for the communication among the nodes in the mesh network, and so they are not neither valid nor routable outside.
- IPv6 RIPE: IPv6 public IPs range (6to6 tunneling). These are globally valid and routable.
- IPv4: IPv4 private range to connect with the final user (4to6 tunneling). They are assigned to the final users attached to a node in the mesh, when they transmit any packet that has to travel throughout the mesh it is encapsulated in an IPv6 packet (tunneling).

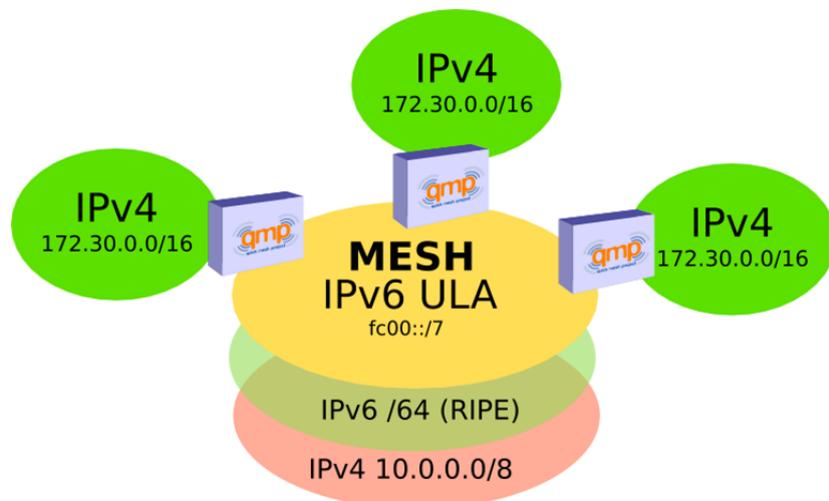


Figure 2.4: QMP Addressing

[Escrich, 2012b]

2.3.4 Operating modes

The firmware has two different operating modes, depending on the scenario we should choose one or the other:

- Roaming for fast deployments: All the access points in this mode will have the same IP and the same ESSID in order to allow users mobility, namely,

they will not lose the connection although they switch from an AP to another. Every AP implements a Network Address Translation (NAT) and so, two users attached to different APs will not have direct vision between them.

- Community: Every node will have a randomly assigned IPs range and will announce this range through the mesh. There is not NAT, every user has direct vision with the others (1 hope away from the IPv4 network layer point of view), but mobility is not allowed (no roaming).

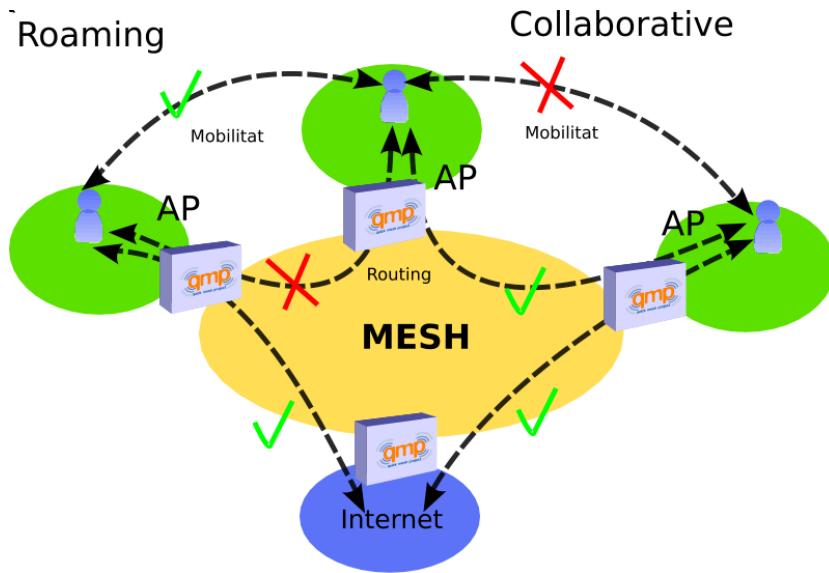


Figure 2.5: QMP Operating Modes

[Escrich, 2012b]

2.3.5 DRP

The firmware uses different protocols:

- BMX6 as the main DRP.
- Optimized Linked State Routing version 6 (OLSR6) as a backup DRP.
- Babel as a backup DRP but optional.

Usually, two networks are built in parallel the main one using BMX6 and the backup on using OLSR6. There are two reasons for that:

1. To prevent that a node gets isolated (no neighbors) due to a single BMX6 failure.
2. To make performance measurements of both protocols in exactly the same environment. This was very useful at the beginning of the project to decide which protocol was better in every scenario.

All these three protocols use IPv6 ULA to talk to other nodes and are isolated at the link layer (MAC) using VLANs. It allows the protocols to work in parallel (if necessary) without interfering with the other protocols.

2.3.6 BMX6

Since BMX6 is the main DRP we are going to analyze it deeply:

BMX6 is a table-driven routing protocol for wireless mesh networks. [...] its goal is to compose a path from source to destination by deciding on each node which will be the next hop. BMX6 is a distance vector protocol, since the information each node manages is [...] destination node, next hop and cost. [Neumann et al., 2012]

In terms of dissemination - how the nodes exchange the information - we can distinguish between two different states: transient and steady.

- Transient phase: the nodes exchange information related to the environment: Internal IDentifier (IID), nodes description, links, etc. Thanks to this information, ever single node builds a dictionary table that translates between IID to the global hashes of the full node description.
- Steady phase: every node has local information state (IID-to-hash dictionary) and global information state as hash-to-description. So, during this phase there is just a small exchange of packets that inform about link metrics and network changes. Thank to the tables set up in transient phase, those packet do not need to use the 128 bit IPv6 address as the identifier, they can use the 16 bit IID which produces a much lower overhead.

To summarize, we can say that BMX6 controls the overhead better than other protocols (some experiments demonstrate that, for example: [Neumann et al., 2012]) there is a big overhead at the very beginning (transient state) and later it becomes very low during the steady state. So the main features of this protocol are:

- Pro-active: Uses UDP flooding to periodically send Originator Messages (OGM) and build a routing table.
- Destination-sequenced, Distance-vector (DSDV): Every node just knows which neighbor is better to reach another, namely, they do not need to know the entire topology, just the best paths.
- Does not use IP as node identifier, it uses global identifiers using SHA2 hashing.

In terms of the kind of frames used by BMX6 we have two different types: periodic messages, periodically generated on every node and occasional messages, exchanged only when necessary. The most used are the periodical which are the following:

Frame name	Description
HELLO_ADV	Hello advertisement. Used for letting neighboring nodes detect the link quality in transmit direction (from sending to receiving node).
RP_ADV	Rx probe advertisement. Used for reporting about reception rate of hello messages from neighboring nodes.
OGM_ADV	OGM advertisement. Used for updating periodically route and metric information over the mesh.
OGM_ACK	OGM acknowledgment. Used for acknowledging the previously reception of a full OGM_ADV frame.

Table 2.1: BMX6 Frames

[Escrich, 2012a]

Chapter 3

CONTRIBUTION

As we mentioned in previous chapters, we wanted to find ways to contribute to current open mesh networks, by providing ideas, introducing new hardware (or new ways to use the existing one) or building applications that run over the network.

We can divide the contribution of this project in three different points:

1. Study and documentation of the Mobile Node project
2. Installation of a node within Poblenou Mesh
3. Development of an audio and/or video streaming Android application

3.1 Mobile Node Project

The mobile node is a portable and auto-configurable transmission unit with wireless technology that offers mobility in the urban space. This node is designed to contribute to the digital mesh through existing networks. Furthermore, it provides connectivity with a wide range of different hardware: fixed nodes, other mobile nodes, smartphones, pc, tablets, etc.

The basic idea that lies behind the concept of the mobile node, is the socialization and modeling of the networks according to the interests and needs of communities and citizens, completely changing the paradigm. At present, networks are designed and deployed based on corporate and/or government interests, this fact does not allow the home user to control its data flows and, much less, get involved

in the process.

In other words, what we are doing with the Mobile Node, is making the most of the hardware and firmware we have, combining them and using the resulting device in a different way. So, a mobile node, in our context, is a device that can be used to expand networks already deployed and give coverage to a zone where there was no coverage at this time. Therefore, we are taking advantage of the "Auto-configuration" feature of QMP to provide Internet Access rapidly.

The main advantage of this device, is the speed and freedom that offers. Given this features, the most common usage will be as a temporary solution to cover a particular zone during a certain period of time. It can be very useful in events, congresses, concerts, parties, etc. Which will take just a few hours or days. Using this device in cities like Barcelona, where fixed mesh networks are quite extended, will allow the organizers of the events to provide Internet Access to the attendants in a very fast, easy and cheap manner.

Although covering events is, perhaps, the main usage we can give to our mobile node it is not the only one. Since we are talking about open networks, with open firmware we have the freedom to use them as we prefer. Normally, the mobile nodes are supplied using batteries which will last just some hours, but it is not strictly necessary to use them that way. We could join a community or create a new one and model our own networks using mobile nodes, there are no restrictions considering that a mobile node is nothing but the same hardware and the same firmware used in a different way.

Given all these facts, that is the reason why we talk about changing the paradigm and start modeling the networks according to the interests of those who are going to use them.

So, the biggest contribution we did in that field, was to write a document talking about the project, its origins, how to build our first mobile node, the hardware we need, how to configure some devices and build a small mesh, the prototypes that are being tested nowadays, etc. Since this is a project which is being carried out by Efraín Foglia with the support of Mobility Lab, we just took all the information and started doing experiments to build the networks and the nodes, but did

not do anything new. So we created a document gathering all the information that will allow beginners to start learning and working in that field. This document can be found at appendix 2.

3.2 New node in Poblenou Mesh

As we already mentioned in previous chapters, nowadays, Barcelona has plenty of open mesh networks working, one of them is the one placed at Poblenou neighborhood. Most of the nodes of the network, are still using the old firmware GSF and some members of guifi.net and some volunteers are trying to update all of them to QMP. Since our campus is placed in Poblenou and the main building in one of the tallest of the neighborhood we decided to contribute to the mesh by placing a node on the roof of that building.

Being that it was the first time we were working with this kind of firmware and hardware we followed a set of steps before deploying the node.

3.2.1 Choice of Hardware

Given the position and height of the building, and the physical situation of the other nodes, we made a first approximation which said that we should cover an angle between 70 and 100 degrees. Thanks to the previous experience of the QMP and guifi.net teams, the decision did not take too much time since they solved many similar situations in the past. Their recommendation was to use a Rocket M5 from Ubiquity Networks together with a 90 degrees sector antenna.

The main features of these hardware are:

- Rocket M5:
 - Description: Outdoor base station which transmits in the 5GHz band
 - Protocols: 802.11a, 802.11n
 - Outside reach: more than 50km (depending on the antenna)
 - Transmission frequency: 4900-5800MHz
 - Max. Transmitted power: 27 dBm



Figure 3.1: Rocket M5

- Airmax 5G-17-90:
 - Description: 90 Degree, 5 Ghz, MIMO, 17 dbi Sector antenna for ROCKET M5



Figure 3.2: Airmax 5G-17-90

3.2.2 Lab Testbed

In order to test the hardware and firmware before deploying the node, we created a testbed in the lab. We took three different nodes, installed QMP and built a small mesh to get familiar with this kind of networks.

The devices we chose were: Nanostation M5, Alix 2D2 and Rocket M5. We flashed¹ them with the most recent version of the firmware and we got an indoor mesh:

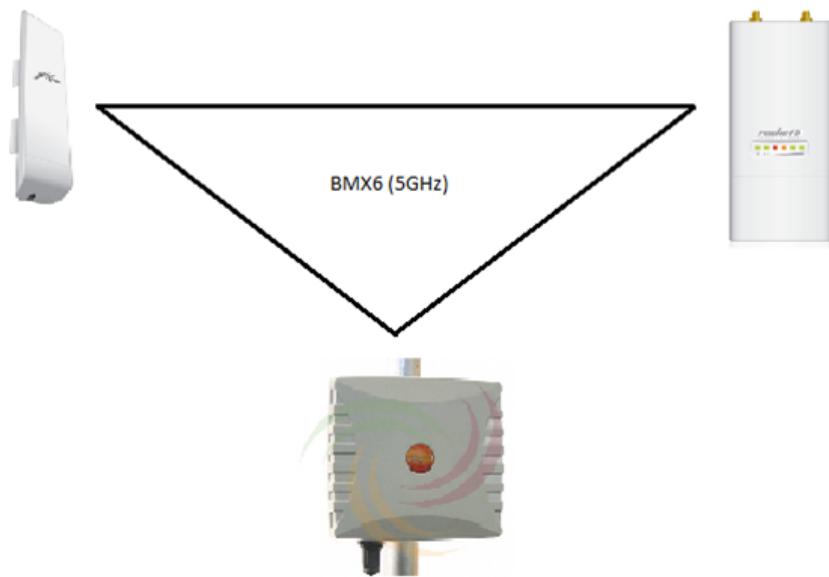


Figure 3.3: First testing mesh

Thanks to the firmware, the nodes recognized each other in a few seconds and the network was deployed automatically. The next step was to set at least one of the nodes as a gateway to a wider network, the Internet in this case. We connected the Wide Area Network (WAN) interface of the Nanostation to a switch with an output to the Internet and waited for a result. In a few seconds, the Nanostation had announced this gateway throughout the mesh and so, all the nodes added a new entry to their tables showing the path to get this network.

¹More details on how to flash the nodes in appendix 2

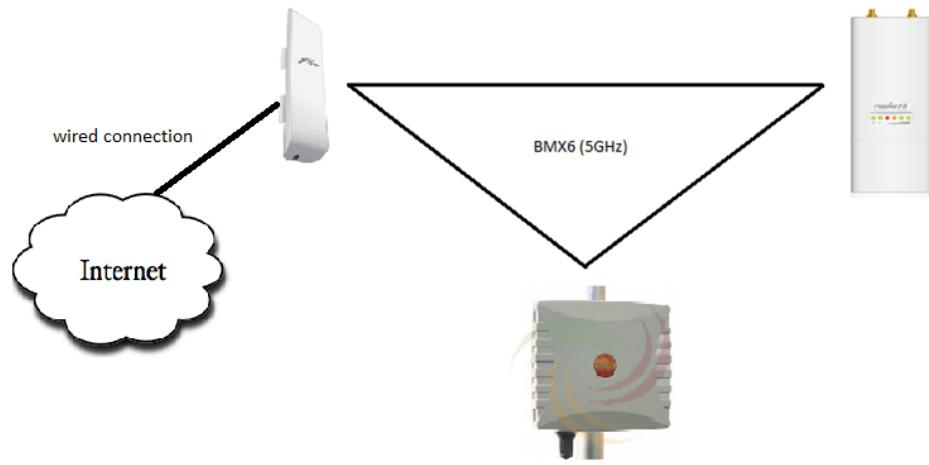


Figure 3.4: First testing mesh with gateway

Afterwards, we wanted to test if this gateway was actually working or not. To do so, we connected some clients via Wi-Fi to the Alix and tried to access to the Internet from them.

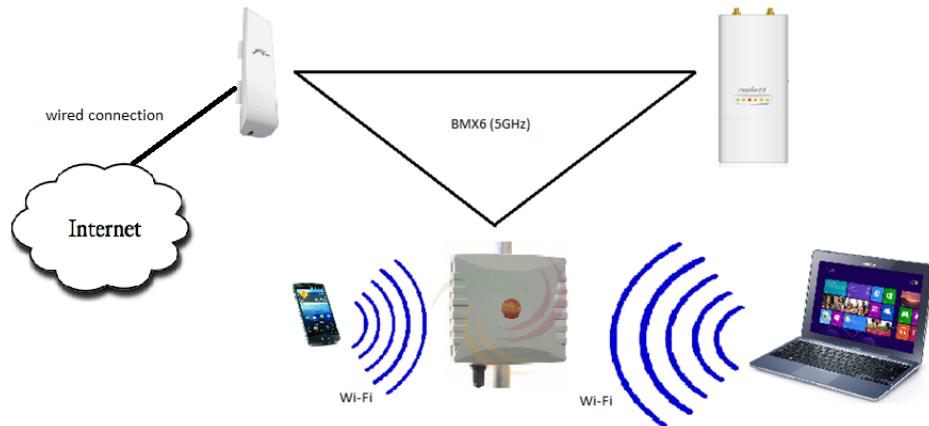


Figure 3.5: First testing mesh with gateway and clients

It worked as expected, and we could access the Internet without problems, fact that proved that we had built the mesh properly and that both hardware and firmware were doing their job perfectly.

3.2.3 Physical installation of the Rocket M5

Once we had tested that the hardware was working well and that we could build a mesh without problems, we proceeded to the installation of the device on the roof of the building. To do so, we just needed to point the antenna to the right direction and set the same transmission channel of the other nodes. Here we have some pictures of the result:



Figure 3.6: Rocket M5 installed on the roof of Roc Boronat Building (1)



Figure 3.7: Rocket M5 installed on the roof of Roc Boronat Building (2)

To be able to supply the node, and access to it to change the configuration or check any feature, we connected both the Power over Ethernet (PoE) and Local Area Network (LAN) interfaces to a switch which allowed us to do both things:

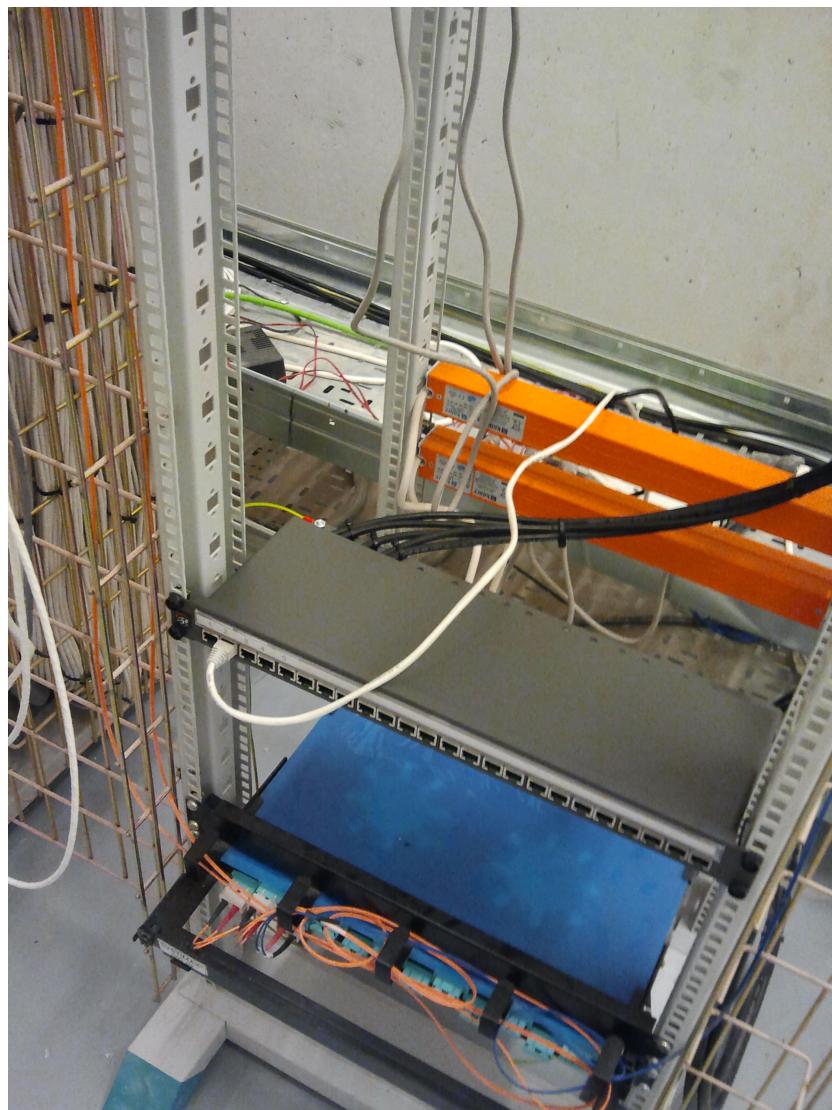


Figure 3.8: Rocket M5 connected to the Switch

At the moment, we have direct vision with one other node. At the same time, this node is connected to another one, so we have a mesh of three nodes deployed.

Hostname	Primary IP	Via Device	Metric	Last Desc	Last Ref	Blocked
p9SFrmbl68-3b	fd66:66:66:f:215:6dff:fe7:163b	wlan0.12	26375K	20792	1	0
p9SFrmbl82-29	fd66:66:66:19:de9f:dbff:fe27:6b29	wlan0.12	31808K	19738	1	0
qMp3e	fd66:66:66:8:de9f:dbff:fe35:1a3e	...	128G	18898	0	0

Figure 3.9: Poblenou Mesh nodes

We can also see the graph that displays how are the nodes connected among them:

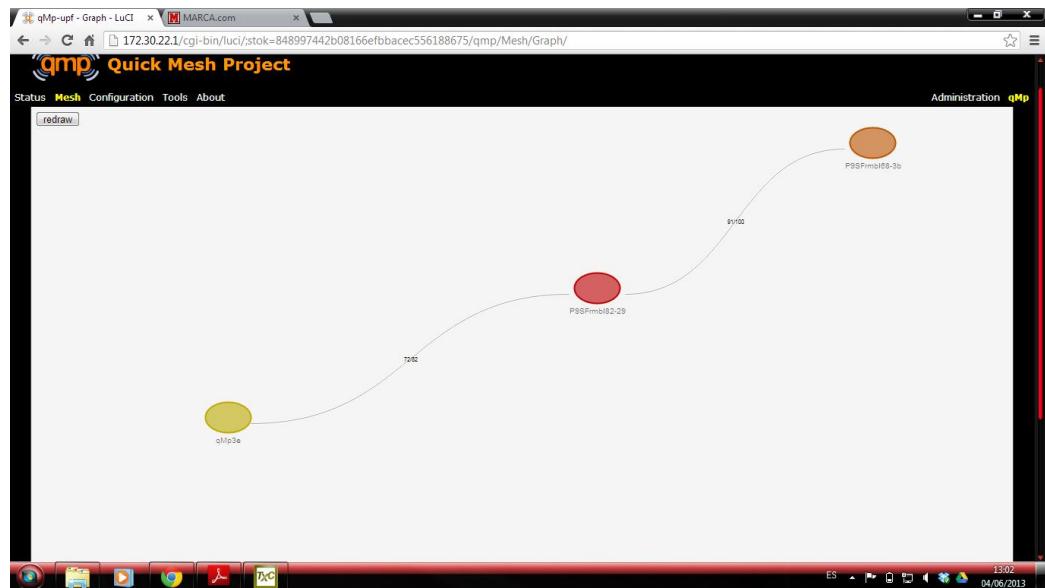


Figure 3.10: Poblenou Mesh nodes distribution

The main purpose of these networks is to provide Internet Access, and in this particular network one of the nodes is acting as a gateway to the Internet and we can access to it from any of the nodes in the Mesh.

Gateways tunnel announcements											
Mesh gateways											
Tunnel	Node	Network	Bandwidth	SearchNet	Type	Path Metric	IP metric	Tun metric	Bonus	search id	
qmp_2	10.0.0.0/8	---	---	1024	---	0	-	
qmp_3	P9SFrmb162-29	10.139.173.26/32	128G	10.0.0.0/8	bmx6	38554K	1024	45298K	0	-	
qmp_0	P9SFrmb162-29	2012:0:0:1:29::/64	128G	::/0	bmx6	38554K	1024	45298K	0	-	
qmp_3	P9SFrmb168-3b	10.139.173.34/32	128G	10.0.0.0/8	bmx6	30348K	1024	35861K	0	-	
qmp_1	P9SFrmb168-3b	Internet	983K	0.0.0.0/0	bmx6	30348K	1024	35861K	0	-	
qmp_0	P9SFrmb168-3b	2012:0:0:3b::/64	128G	::/0	bmx6	30348K	1024	35861K	0	-	

Figure 3.11: Poblenou Mesh announced links

3.3 Mobile Node Android Application

This application, is specially designed to work in a scenario together with the mobile node but it may work in any LAN. The application basically streams the video and audio captured by the smartphone camera throughout the LAN and any client within the network can receive it. So, we have two separated entities acting in this scenario: the app which is the server and a computer which is the client.

3.3.1 Server side

The server side, will run the app in a smartphone and it will be usually done by the final user. The user, will just need to choose the options (frame rate, bit rate, height, etc) or leave the default ones and accept them. At this moment, the app is ready to receive incoming connections from any client. When a connection is received, the server will start the streaming session.

Generic Use cases

Case	Open the app and choose the options
Context	The users wants to choose a particular configuration before starting the stream
Primary Actors	User
Preconditions	The user has the app installed in the Smartphone and has launched it.
Post-conditions success	The user chooses and accepts the settings and the app is ready to start the stream
Post-conditions failure	The settings cannot be accepted due to an internal error or a user's mistake. The streaming session cannot start.
Main stage for Success	<ol style="list-style-type: none">1. The user launches the app.2. All the options (resolution, bitrate, framerate, etc) are chosen or left by default.3. The settings are accepted.4. The app is ready to start streaming sessions.
Extensions	-

Table 3.1: Server Side Use Case 1

Case	Share the URL on Twitter before accepting the settings
Context	The users wants to share its URL on twitter
Primary Actors	User
Preconditions	The User presses the "Share Url" button
Post-conditions success	The twitter app (if installed) or the browser launch with a tweet ready to be posted.
Post-conditions failure	Neither the twitter app nor the browser launch, or they do it wrong.
Main stage for Success	<ol style="list-style-type: none"> 1. The user launches the app. 2. The user presses "Share Url" button. 3. Twitter app or browser launch. 4. The user presses the "send tweet" button. 5. The tweet is posted correctly.
Extensions	3.a Neither twitter app nor browser launch 3.a.1 Return to Step 2 5.a The tweet is not posted 5.a.1 Return to Step 4

Table 3.2: Server Side Use Case 2

Case	Stop a streaming session once started
Context	The user wants to close a session
Primary Actors	User
Preconditions	A streaming session is running
Post-conditions success	The streaming session is closed correctly
Post-conditions failure	The session keeps alive
Main stage for Success	<ol style="list-style-type: none"> 1. The user launches the app. 2. The user accepts the options. 3. An clients connects. 4. The streaming session begins. 5. The user presses the "stop" button. 6. The session closes.
Extensions	<p>6.a The session does not close</p> <p>6.a.1 Return to Step 5 if it is a button problem</p> <p>6.a.2 Close the app, and return to step 1 if it is a client problem or a generic app problem</p>

Table 3.3: Server Side Use Case 3

Layout

The

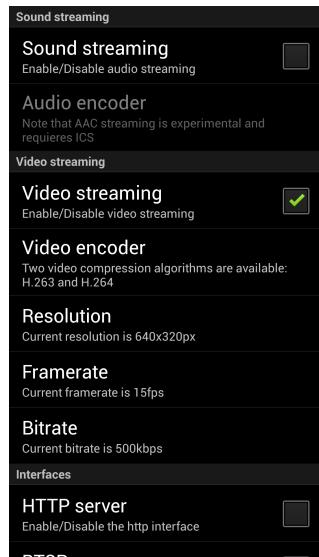


Figure 3.12: App Options Screen

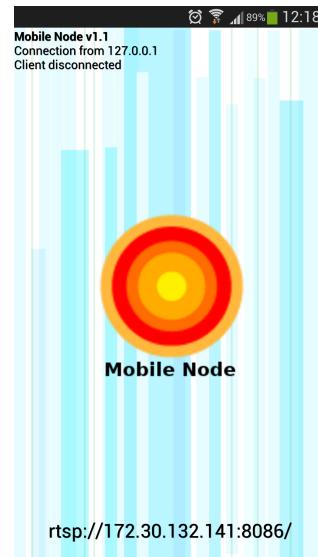


Figure 3.13: App Main layout screen



Figure 3.14: App Main layout screen with camera on

Chapter 4

RESULTS

TODO

Chapter 5

CONCLUSIONS

TODO

Chapter 6

FUTURE WORK

TODO

Bibliography

- [Escrich, 2012a] Escrich, P. (2012a). Quick deployment network using MANET. Degree thesis.
- [Escrich, 2012b] Escrich, P. (2012b). Xarxes mesh. curs guifi.net 2012. Presentation.
- [Foglia, 2010] Foglia, E. (2010). Mobile Node: Open Portable Infrastructure, Overlapping Digital Paths. *MediaCity: Interaction of Architecture, Media and Social Phenomena.*, pages 557–570.
- [Huynh,] Huynh, P. Simulation and analysis of wireless mesh network in advanced metering infrastructure.
- [Mogaibel et al., 8 14] Mogaibel, H. A., Othman, M., Subramaniam, S., and Hamid, N. A. W. A. (2012-08-14). Wireless mesh networks - efficient link scheduling, channel assignment and network planning strategies.
- [Neumann et al., 2012] Neumann, A., Lopez, E., and Navarro, L. (2012). An evaluation of bmx6 for community wireless networks. *International Workshop on Community Networks and Bottom-up-Broadband (CNBuB 2012)*.
- [Ramesh et al., 2010] Ramesh, V., Subbaiah, D. P., Rao, N. K., and Raju, M. J. (2010). Performance comparison and analysis of dsdv and aodv for manet. *International Journal on Computer Science and Engineering*, 2(02):183–188.

Chapter 7

APPENDIXES

.1 Appendix 1: Pilot Charter

Pilot Charter - Mobile Node

Fernando Gros González

6 de diciembre de 2012

1. Opportunity/Idea

The opportunity of carrying out this project resides in the BuB branch of the Commons for Europe initiative. This project was initially impelled by Guifi.net and exo.cat among others and now has been introduced in this BuB4EU in order to receive this «last push». The main idea is to create a free transmission workstation that can be used in the urban space and contributes to the digital mesh through other networks.

2. Description/Purpose

The project will consist on creating a mobile wireless workstation that creates or fits in an existent telecommunications infrastructure. It will have to be an auto-configurable device and will have the capability to interconnect with a wide range of different hardware. Furthermore, it will be able to work in many different spaces and without the need of an ISP.

3. Goal

Improve the actual design of the mobile node, test it, create some documentation and find a way to make it easy-to-replicate.

4. Objectives/Results

- Improve or create a new design of the mobile node.
- Allow citizens to be able to access low-cost technology with a big social return.
- Create documentation of the whole process.

5. Scope

Deploy and test this technology in Barcelona (Raval) and in London (Decision pending) and observe the results to replicate it in other cities.

6. Stakeholders

- guifi.net
- exo.cat
- qmp.cat
- ESADE
- UPF
- mobilitylab.net
- commons for europe
- Locality UK
- Creativecoop UK

7. Risks

- Prototype failures or firmware bugs that can delay the whole project.
- People unacceptance of the system or its social returns.

It is important to mention that this project is in an advanced stage and so, many of the risks that could have affected it are already mitigated.

.2 Appendix 2: Documentation

Universitat Pompeu Fabra

Mobile Node. Detailed documentation

Fernando Gros González
3/27/2013

Table of Contents

Table of Contents	1
What is the Mobile Node?.....	2
How was it born?.....	2
What for?.....	2
Related texts	3
Component Description	4
Hardware.....	4
Software	7
Types of Mobile Nodes	7
Assembly	9
Box drilling and pigtail installation	9
Installation of the board.....	9
Installation of the radios	10
Connection of the pigtails to the radios	10
Installation of the flash card and switching-on	11
Implementation	12
Configuration of the nodes.....	14
Nanostation M5	14
Rocket M5	15
Alix 2D2.....	15
Basic features of the QMP interface	16
Status tab	17
Mesh tab	18
Configuration tab.....	19
Tools tab	20

What is the Mobile Node?

The mobile node is a portable and auto-configurable transmission unit with wireless technology that offers mobility in the urban space. This node is designed to contribute to the digital mesh through existing networks. Furthermore, it provides connectivity with a wide range of different hardware: fix nodes, other mobile nodes, smartphones, pc, tablets, etc.

How was it born?

The basic idea that lies behind the concept of the mobile node, is the socialization and modeling of the networks according to the interests and needs of communities and citizens, completely changing the paradigm. At present, networks are designed and deployed based on corporate and/or government interests, this fact does not allow the home user to control its data flows and, much less, get involved in the process.

Thanks to the low costs of the equipments and to the fact that they are completely self-configuring, it is now possible to model the urban space based on people or communities who are the ones that will be using these infrastructures. It allows users to take part in the process from beginning to end, from bottom to top. Thus, the city and the data flows that govern it will be totally adapted to people, breaking the barriers that are currently imposed by the well established designs we have to deal with.

What for?

The access to independent and self-managed transmission channels in the public space has very high associated costs. Most communities are unable to meet these expenses and therefore, they cannot increase their representativeness within the society controlling their traffic. At this point, is where the project is intended to emphasize. Using bottom-up models we try to respond to this necessity by creating a new concept of “social routing” agreed on consensus, with open protocols that provide access to the physical and digital public space. This configuration, offers a model with low costs, high social representativeness and ease of reproduction.

Related texts

Foglia, E. (2011). Colisiones en la MediaCity, Prácticas sociales y artísticas sobre el trazado digital. En: Impresión Expandida / Expanded Print. (ed.) Eloi Puig, Alicia Vela y Antonia Vilà. ED: Barcelona, Universidad de Barcelona.

Foglia, E. (2010). Mobile Node: Open Portable Infrastructure, Overlapping Digital Paths. MediaCity: Interaction of Architecture, Media and Social Phenomena. ED: Weimar, Bauhaus-Universität.

Component Description

Hardware

Below there is a list of the components that form the mobile node and the other nodes that make possible to create mesh networks and its main features:

- Ubiquiti Airmax Bullet M5:
 - Description: Wireless outdoors device that transmits in the 5GHz band.
 - Details:
 - Protocols: 802.11a, 802.11n
 - Outdoor range (depending on the antenna): more than 50km
 - Transmission Frequency: 5470MHz-5825MHz
 - Maximum transmitted power: 27 dBm
 - Bandwidth: Until 100Mbps
- Ubiquiti Nanostation M5:
 - Description: Outdoors CPE (*Customer Premises Equipment*) device that transmits in the 5GHz band.
 - Details:
 - Protocols: 802.11a, 802.11n
 - Outdoor range: more than 15km
 - Transmission Frequency: 4900-5800MHz
 - Maximum transmitted power: 27 dBm
 - Bandwidth: Until 150Mbps
- Ubiquiti Aircam dome:
 - Description: IP cammera Ethernet cable supplied.
 - Details:
 - Supported protocols: IPv4/v6, HTTP, UPnP, DNS, NTP, RTSP, DHCP, TCP, UDP, IGMP, RTCP, ICMP, ARP
 - Image quality: 30 FPS, HDTV 720p
 - Video compression: H.264/MPEG-4/MJPEG
- Ubiquity Aircam mini:
 - Description: IP cammera Ethernet cable supplied.
 - Details:

- Supported protocols: IPv4/v6, HTTP, UPnP, DNS, NTP, RTSP, DHCP, TCP, UDP, IGMP, RTCP, ICMP, ARP
 - Image quality: 30 FPS, 1MP/HDTV 720p
 - Video compression: H.264/MPEG-4/MJPEG

- Arduino DUE:
 - Description: Electronic board based on a core ARM 32-bit processor that enhances the standard Arduino functionalities.
 - Details:
 - Microcontroller: AT91SAM3X8E
 - Digital I/O pins: 54 (12 have PVM output)
 - Analog input pins: 12
 - Analog output pins: 2

- Arduino WiFi Shield:
 - Description: Board that connects an Arduino to the Internet wirelessly.
 - Protocols: 802.11b, 802.11g
 - Encryption types: WEP y WPA2

- 2 batteries: Rechargeable Li-ion Emergency Power Battery:
 - Description: Battery for video camera, walkie talkie, camera, etc.
 - Capacity: 9000mAh
 - Input voltage: 12.6V
 - Output voltage: 12V

- 2 black passive screwable POE modules:
 - Description: It supplies electrical power to the device through an Ethernet port that supports PoE.
 - Connector: Ethernet RJ-45
 - Bandwidth: 10/100 Mbps

- Network cable and Ethernet RJ-45 connectors:
 - Description: Wire and connectors to assemble direct and crossover Ethernet cables.

- Female faston connectors:
 - Description: Connectors to be added to an electrical wire.

- Box with IP65 antenna:
 - Description: Outdoor compact case with an integrated antenna that operates across the 5GHz band.
 - Details:
 - Transmission frequency: 4900MHz-5900MHz
 - Maximum Gain: 20 dBi
- PC Engines ALIX 2D2:
 - Description: Low power computer board:
 - Details
 - Memory: 256 MB DDR DRAM
 - Processor: 500 MHz AMD Geode LX800
- Compex radio:
 - Description: Compact radio with a high performance and a low power consumption.
 - Transmission frequency: 2,4GHz y 5GHz
 - Protocols: 802.11 a/b/g/n
 - Chipset: Atheros AR5414
- Pigtail 15cm. UFL/N-H (female) Bulkhead:
 - Description: Connector good for most of Mini-PCI radios.
 - Details:
 - Connector type: UFL (IPEX, Hi-Rose) to N Female Bulkhead.
- Pigtail 5 GHz. UFL-SMA plug right angle 30 cm:
 - Description: Connector for box-integrated antennas and most of Mini-PCI radios.
 - Details:
 - Connector type: UFL (IPEX, Hi-Rose) to SMA right angle.
- Power supply 18v. 0,8 A (15 W) Alix 2C/3C):
 - Description: Switching power supply unit for Ubiquiti devices, Alix boards, etc.
- DMD: Dot Matrix Display
 - Description: LED panel that easily displays clocks, status screens, graphs, etc. Compatible with Arduino.

Software


The software used by the mobile node is a firmware called Quick Mesh Project (QMP). It is a GNU/Linux operating system based on OpenWRT for embedded devices. The main features of this firmware are:

- OpenWRT based
- 802.11a/b/g/n support
- IPv6 native
- IPv4 tunneled over IPv6
- Auto configuration system
- Web GUI to monitor and configure
- Visualization tools (maps, graphs, etc.)
- Automatic dynamic routing (zero-conf)
- BGP (Border Gateway Protocol) support (half implemented)
- Open Source


Types of Mobile Nodes

Due to the different needs identified during the development process of the prototypes, it was decided to create four different design options. Each with its own characteristics:


- 1) **Panzer.** Robust with a large electronic box which can hold more batteries. It has greater stability. 4 wheels.
- 2) **Tarantula.** Lighter than Panzer. It has extendable legs for stability. 4 wheels.
- 3) **Trip.** Special for trips. Based on existing plastic boxes. Tracker wheels very robust and computer equipment container.
- 4) **Cam.** Wireless high definition video camera which interconnects with mobile nodes. Lightweight and with the possibility of streaming video.

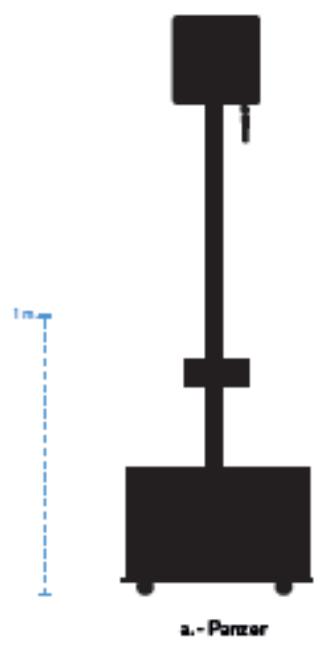

a.- Panzer

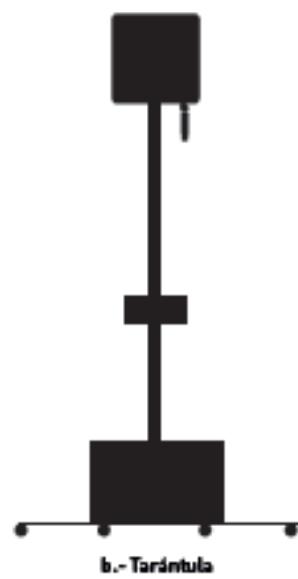

b.- Tardintula

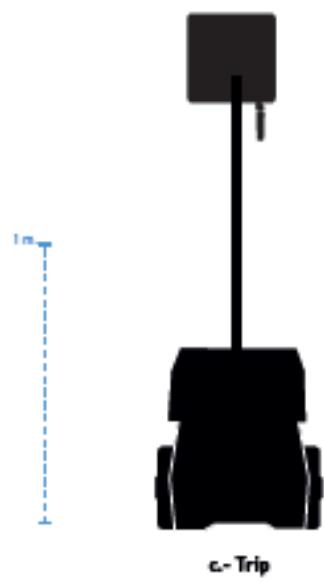

c.- Trip



d.- Cam

Assembly

We will divide the process in several steps

Box drilling and pigtail installation

The following pictures show the process:



Undrilled box



Drilled box



Box with pigtail installed

For this process, it is necessary a drill (or similar) to perforate the box and a cutter (or similar) to scratch and remove the remaining burr.

Installation of the board


It basically consists on adhere and affix the board to the box.



Affix the brackets to the board



Orientation and location of the board in the box

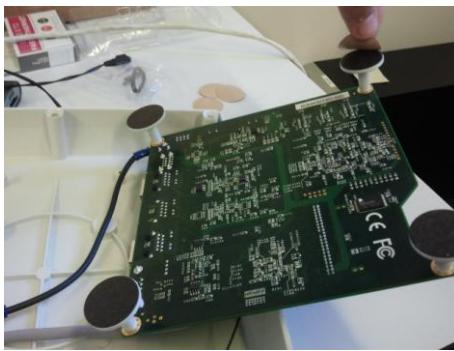

Remove the protectors of the brackets




Board affixed and wires orientation

For this process it is simply necessary a screwdriver.

Installation of the radios

Fit the radios into the appropriate slots of the motherboard:

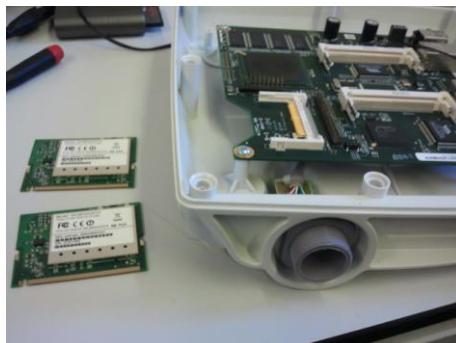

Compex radios



Radios installed on the board

Connection of the pigtails to the radios



Pigtails connected to the radios



Pigtail connected to the upper cover of the box (antenna)

Installation of the flash card and switching-on



Card inserted into the slot



Power supply connected




Box closing

¹ For more information see the video tutorial: <http://vimeo.com/58127395>


Implementation

The following illustration shows a basic implementation of the Mobile Node with Alix antenna:

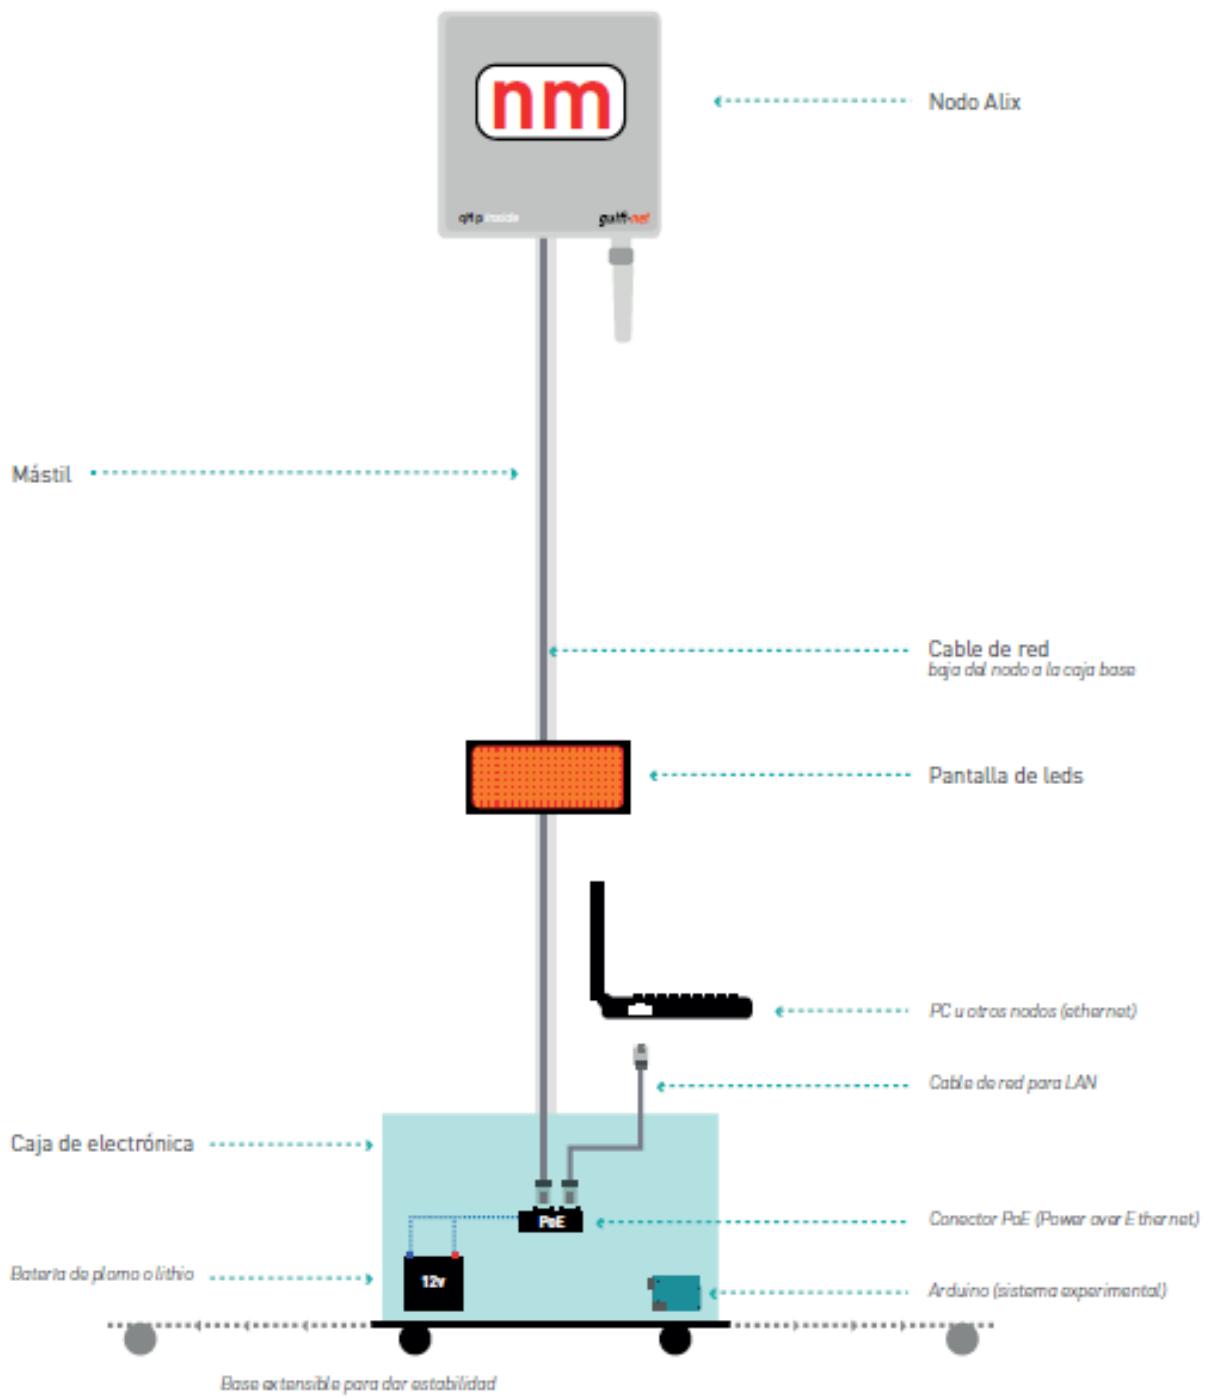

It is noted that we, basically, have the alix box fixed to a mast and connected to a battery. On the other hand, we have the LED screen that displays node status information and other relevant information using arduino and a PC that lets you quickly set the node.

With this implementation we will be able to offer coverage to a particular area by expanding an existing fixed network. A basic example of mesh network could be the following:

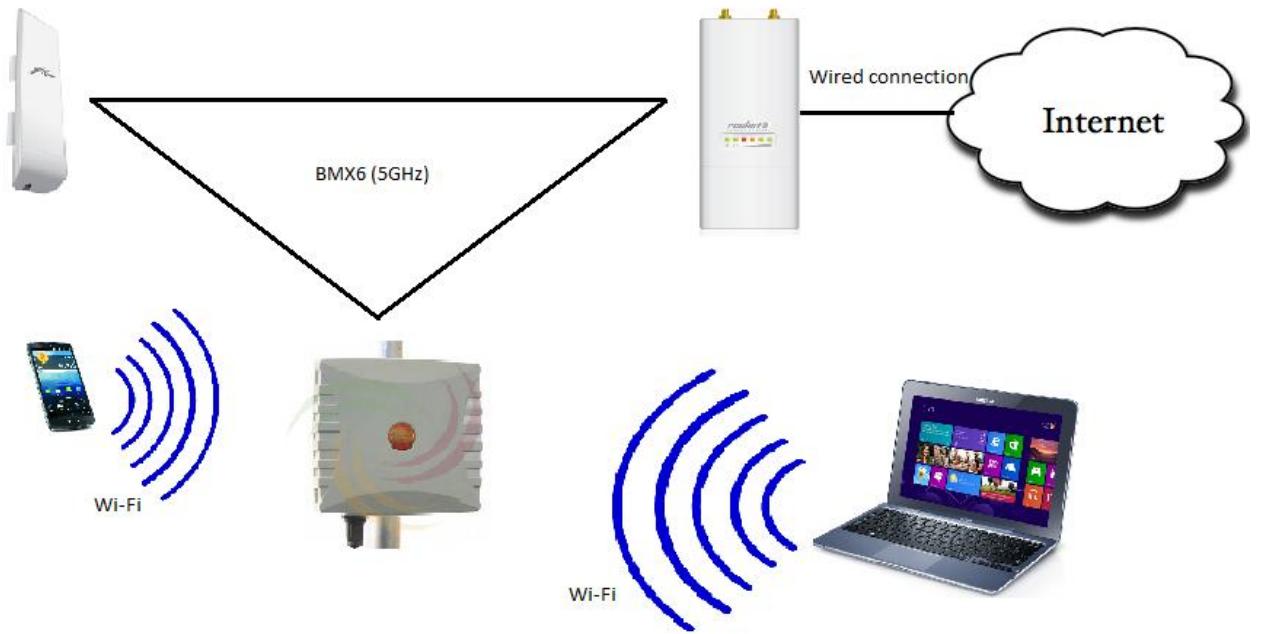

There is a fixed network composed for two antennas, thanks to our mobile node we can expand it and provide Wi-Fi connection to the final users.

Configuration of the nodes

To download and compile the source code of QMP we have to follow these steps:

- 1) Download the source code from the repository:
 - a. (Recommended) `git clone git://qmp.cat/qmpfw.git qmpfw`
 - b. `wget -c -q -O - "http://qmp.cat/gitrevision_download?project_id=7&rev=anonymous" | tar zxvf -`
- 2) Go to the source folder:
 - a. `cd qmpfw`
- 3) (Recommended) Make a “checkout” of the “testing” branch:
 - a. `make .checkout_qmp QMP_GIT_BRANCH=testing`
- 4) Compile specifying the target node type:
 - a. `make build T=alix`
 - b. To see the available targets: `make list_targets`
 - c. If you have more than one core in your processor you can execute: `make build T=alix J=N`, where N is the number of cores that you want to use.
- 5) Finally, you will be able to find the compiled image in the images/ folder.

Nanostation M5

The steps to flash and configure the Nanostation M5 are the following:

- 1) Reset the device by pressing “reset” button during 10 second, until the lights start to flicker alternatively.
- 2) Install a tftp client, such as tftp-hpa.
- 3) We assign an Ip address to the wired connection of our PC within the 192.168.1.x/24 range.
- 4) From a terminal:
 - a. `tftp 192.168.1.20` (Default IP of the Nanostation)
 - b. `mode octet`
 - c. `trace`
 - d. `put *.bin` (Image compiled previously)
 - e. `quit` (Exit the tftp client)

- 5) Change the IP address to one belonging to the 172.30.x.x/16 range
- 6) We open a browser and go to <http://172.30.22.1> or <http://admin.qmp>
- 7) We use user: root and password: 13f
- 8) We can now utilize the GUI of QMP.

Rocket M5

We need to follow exactly the same steps that we followed with Nanostation M5.

Alix 2D2

Once assembled and mounted into its box, we need to install the firmware in the flash card:


- 1) Connect the flash card to a PC with a card reader (internal or external).
- 2) We execute the command `df -lh` to see the drives list connected to the machine.
- 3) We identify the name associated to our flash card, for example `/dev/sda`
- 4) From the terminal we go to the folder where we have QMP firmware
- 5) We execute the command: `if=firmware.bin of=/dev/sda`, to dump the firmware to the flash card.
- 6) We execute the command: `sync`, to empty the buffers and make sure that there are not more pending operations.
- 7) We extract the flash card and insert it into the Alix board.
- 8) We switch it on and wait a reasonable time until the firmware is loaded.
- 9) Later, we should be able to access the GUI connecting an Ethernet wire and going to the following URL: <http://172.30.22.1> (We do not need to configure any IP since it is assigned with dhcp)

If it does not work, we will need to repeat the dump process since it is possible that an error occurred during the copy process.

Basic features of the QMP interface

Below is a brief introduction to the main aspects of the interface qmp.

First, we have the welcome screen, where we will be asked for the username and password (U: root and P: 13f by default).

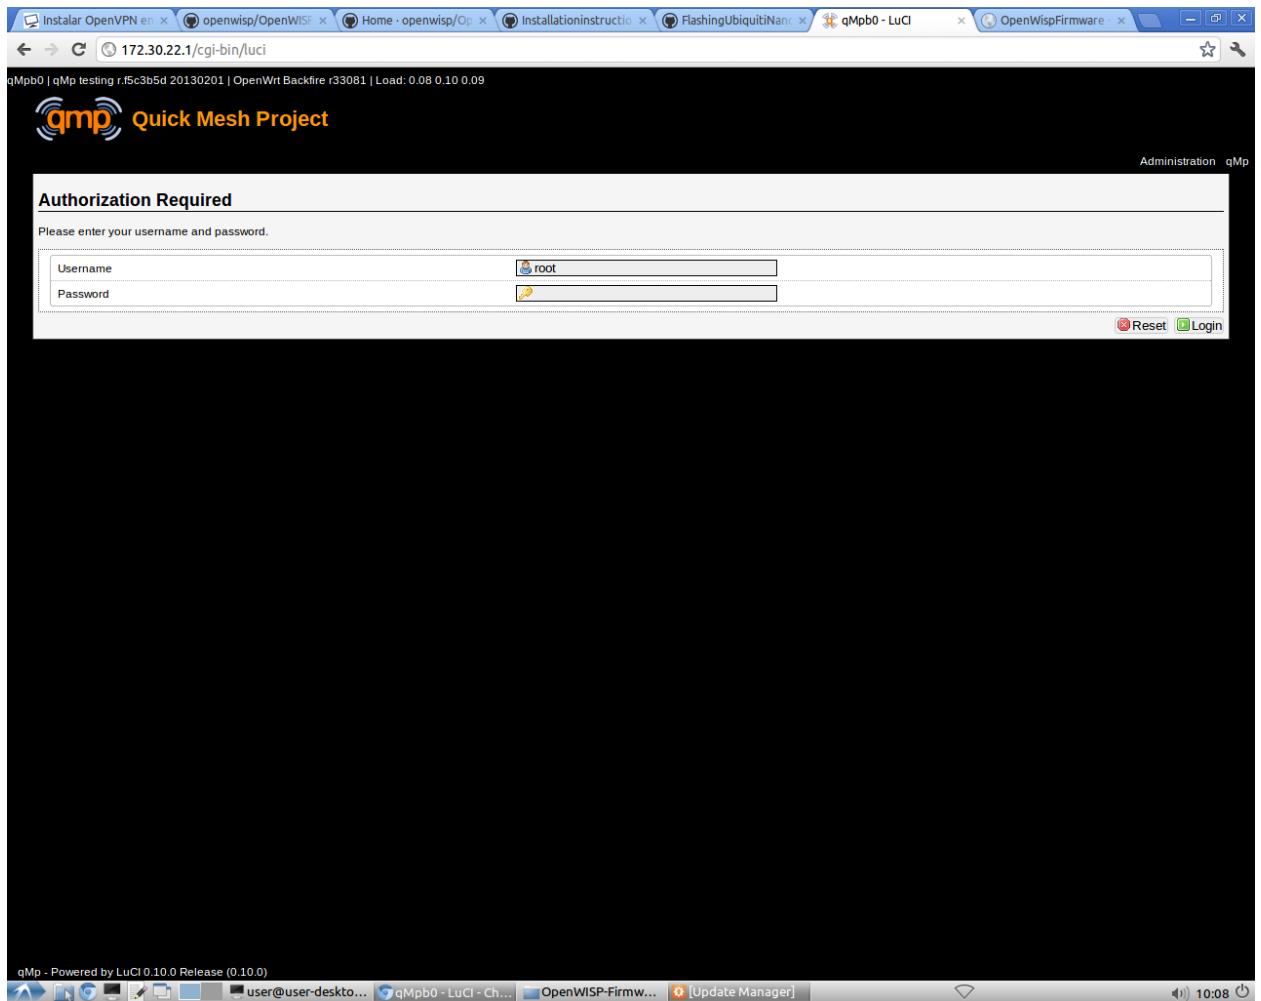

Once you have logged in, we can see the tabs: "Status", "Mesh", "Configuration", "Tools" and "About". We also have the option to access in "QMP" or "Administrator" mode, in the first we have only some basic options that we can control, but are sufficient for many cases. In the second, we have many more options than we can manage, and customize in a more detailed way.

Status tab

It displays general system status: name, hardware model, firmware and kernel versions, memory status, etc. It is a purely informational tab, but it is very useful to get a general idea.

The screenshot shows the 'Status' tab of the qMp web interface. The page title is 'qMp - Quick Mesh Project'. The main content area is divided into several sections:

- System:** Router Name: qMp0, Router Model: Ubiquiti Nanostation M, Firmware Version: OpenWrt Backfire r33081 / LuCI 0.10.0 Release (0.10.0), Kernel Version: 2.6.32.27, Local Time: Fri Sep 9 12:44:55 2011, Uptime: 20148m 6s, Load Average: 0.09, 0.09, 0.09.
- Memory:** Total Available: 15720 kB / 29516 kB (53%), Free: 2428 kB / 29516 kB (8%), Cached: 10168 kB / 29516 kB (34%), Buffered: 3124 kB / 29516 kB (10%).
- Network:** IPv4 WAN Status: Not connected, IPv6 WAN Status: Not connected, Active Connections: 238 / 16384 (1%).
- DHCP Leases:** Hostname, IPv4-Address, MAC-Address, LeaseTime remaining. Subtext: There are no active leases.
- Wireless:** Generic 802.11an Wireless Controller (wlan0). Subtext: SSID: wlan0, Mode: Ad-Hoc, Channel: 140 (5.70 GHz), Bitrate: 7 Mbps, BSSID: 02:CA:PF:EE:BA:BE, Encryption: -.
- Associated Stations:** MAC-Address, Network, Signal, Noise. Subtext: No information available.
- Mesh nodes:** Hostname, Primary IP, Via Device, Metric, Last Desc, Last Ref, Blocked. Subtext: qMp0, 192.168.6.6, ..., 128G, 5649, 0, 0.

The browser address bar shows the URL as 172.30.22.1/cgi-bin/luci. The bottom of the screen shows the desktop taskbar with icons for user@user-deskt..., qMp0 - qMp - LuCI, OpenWISP-Firmware..., Update Manager, and user.


Mesh tab

This tab displays the status of the mesh network. We can observe its current status, check what nodes belong to it, see the links established among them, see a visual graph of nodes and topology, etc.

The screenshot shows a web-based management interface for a mesh network. The URL in the browser is `172.30.22.1/cgi-bin/luci/stok=d62d5253d28e7721c14d47bfa3aba086/qmp/Mesh`. The page title is "qMpb0 | qMp testing r.f5c3b5d 20130201 | OpenWrt Backfire r33081 | Load: 1.21 0.71 0.31 | Auto Refresh: on". The main content area is titled "bmx6" and describes it as "a mesh routing protocol for Linux devices. Visit bmx6.net for more info.". On the left, there is a sidebar with links: Status, Mesh (which is selected), Configuration, Tools, and About. The main panel has two tables. The first table, titled "Network devices", has columns: Name, State, Type, Rate, Local IP, Global IP, Multicast IP, and Is Primary. It currently shows one entry: "BMX6-0.1-alpha" with "Collecting data...". The second table has columns: Version, Compat, Code Version, Global ID, Primary IP, Tun6Address, Tun4Address, Local ID, Uptime, Cpu load, and Nodes seen. It shows one entry: "BMX6-0.1-alpha" with version 16, compatibility 9, global ID `qMpb0:881147D5363DFAB4BB1C`, and primary IP `:`.


Configuration tab

This tab allows to configure the network interfaces, the Wi-Fi, the node itself and to assign the appropriate parameter in every case.

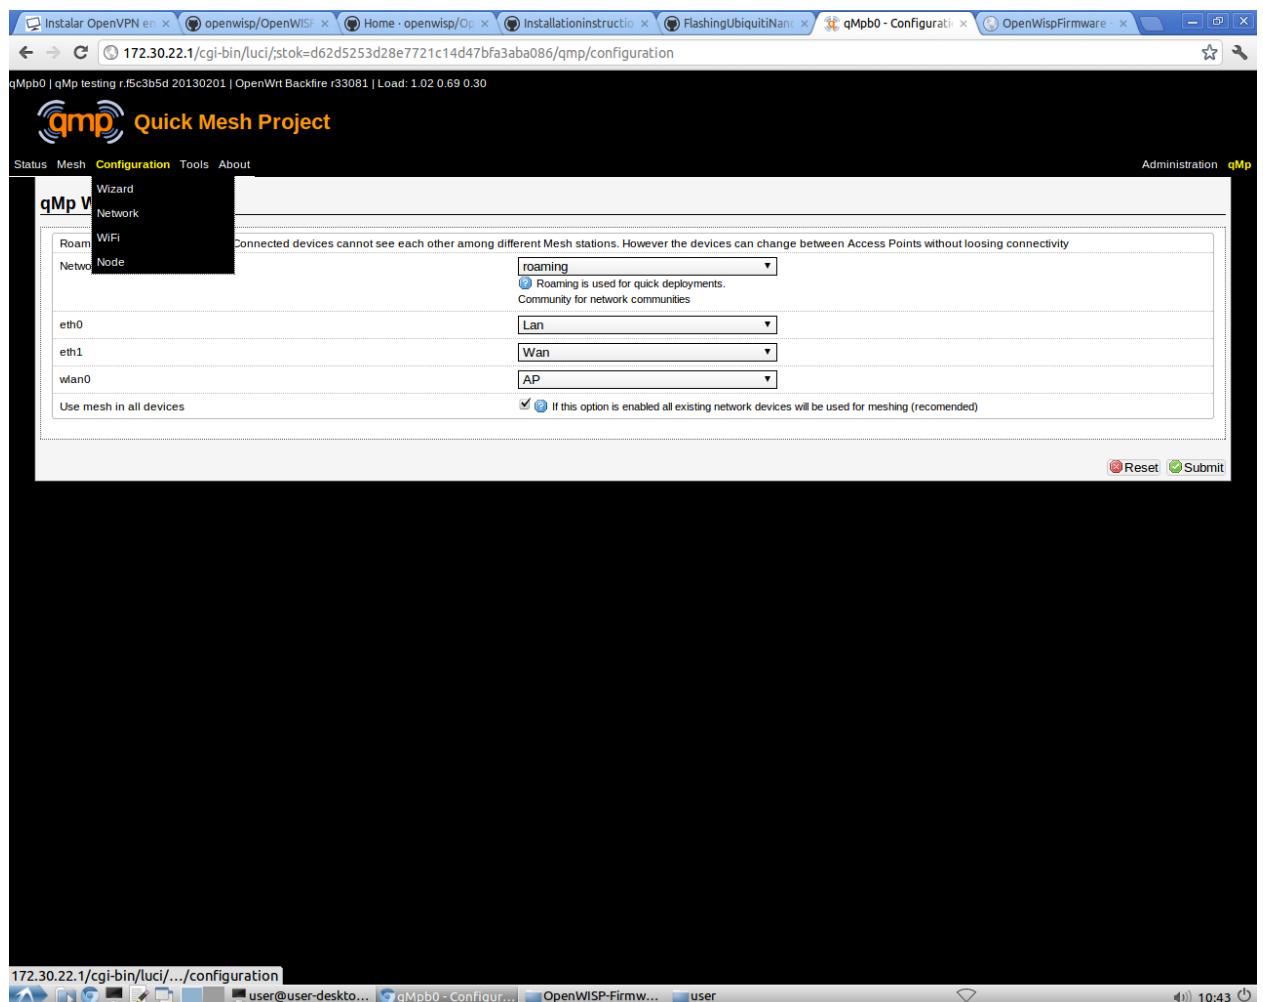

Tools tab

It allows to configure the options, the splash screen, etc.

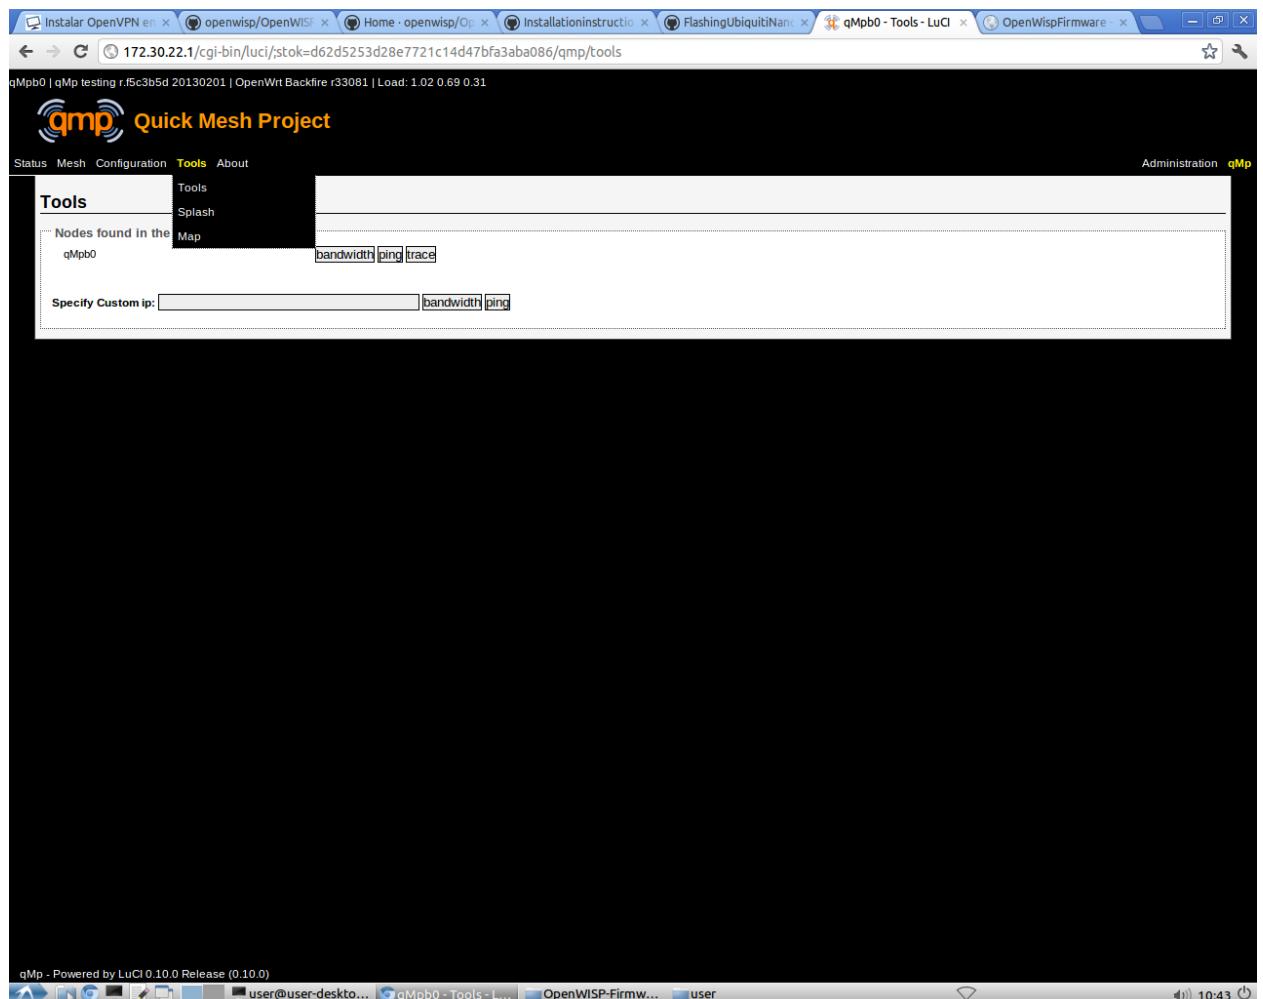

.3 Appendix 3: QMP Presentation

Mobile Node Pilot

Fernando Gros González

04-03-2013

Mobile Node - Qmp Presentation is licensed under a
[Creative Commons Attribution-ShareAlike 3.0 Unported License](#)




Outline

- Introduction
- Mesh and Manet Networks
- QMP
 - Main features
 - Quick deployments
 - Addressing
 - Modes
 - Dynamic Routing Protocol
 - BMX6
- Mobile Node
- Information sources

Introduction


- The main idea within the Mobile Node Pilot is to create a free transmission workstation that can be used in the urban space and contributes to the digital mesh through other networks.

Mobile Node Prototype V_0.01

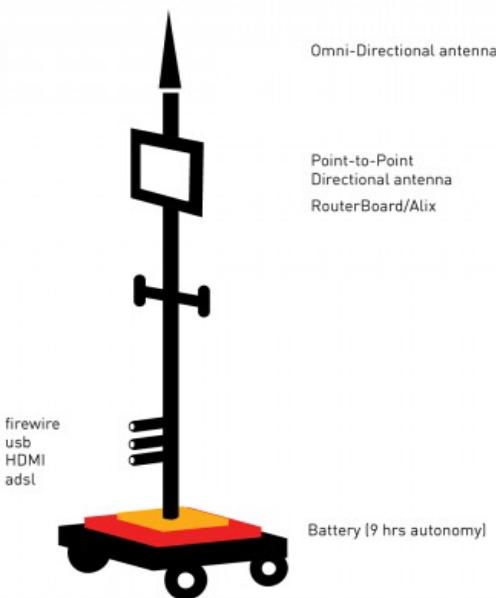


Mesh and Manet Networks (I)

- A mesh network is a network where all the participants are also routers. They are, normally, level 3 networks (Network layer) although they can also be link layer networks.
- Every node has to be connected, at least, to another node in the network, independently of the method (Cable, Wi-Fi, OF, etc.)
- It is not strictly necessary that this kind of networks use the Ad-hoc mode, they can use infrastructure mode too, although it is useless in many cases.

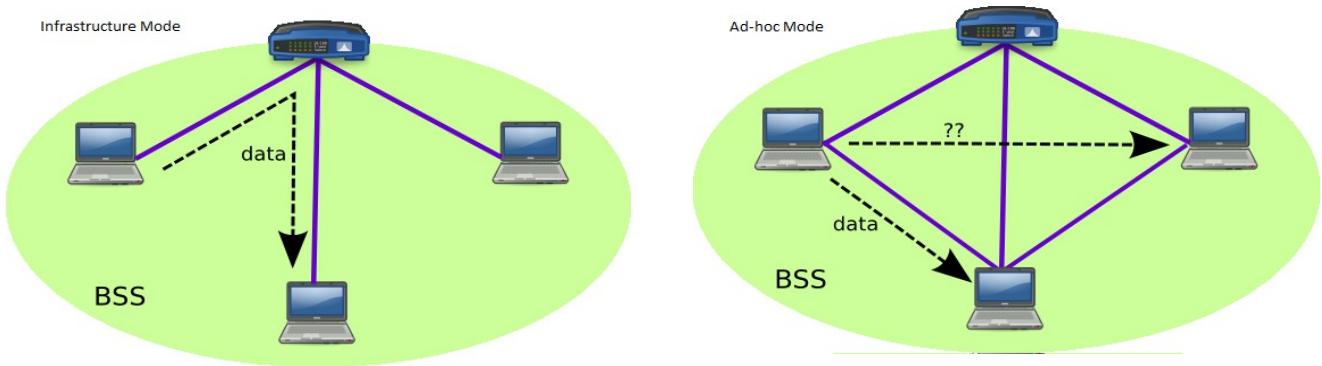

Mesh and Manet Networks (II)

- When we have a mesh network which uses a wireless system to interconnect the nodes and is built in Ad-hoc mode, we talk about MANET (Mobile Ad-hoc Network).
- So a MANET network:
 - “*is a self-configuring infrastructureless network of mobile devices connected by wireless.*” (Wikipedia)
- In order to allow this self-configuring feature, we use Dynamic Routing protocols (DRP) which are specially optimized for MANET deployments.

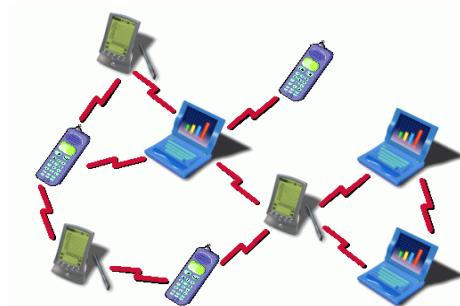

QMP

Main Features


- OpenWRT based
- 802.11a/b/g/n support
- IPv6 native
- IPv4 tunneled over IPv6
- Auto configuration system
- Web GUI to monitor and configure
- Visualization tools (maps, graphs, etc.)
- Automatic dynamic routing (zero-conf)
- BGP (Border Gateway Protocol) support (half implemented)
- Open Source



QMP

Quick Deployments

- One of the scenarios QMP has been developed for is: Quick deployments.
- Achieve the following requirements:
 - The deployment must be performed as fast as possible.
 - It must be able to be done by non-technical people.
 - It must be possible in most situations.

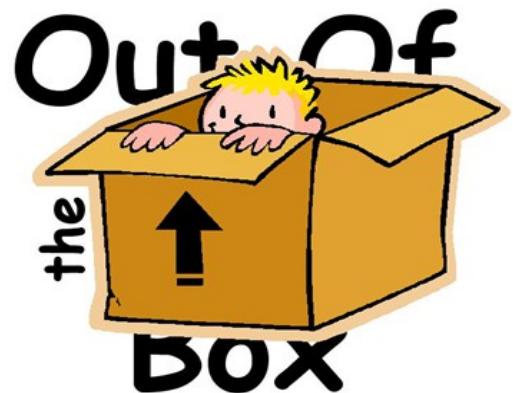


QMP

Addressing

- Qmp uses three different kind of IP addresses:
 - IPv6 ULA: IPv6 private range to be used internally in the mesh. These IPs are used for the communication among the nodes in the mesh network, and so they are not neither valid nor routable outside.
 - IPv6 RIPE: IPv6 public IPs range (6to6 tunneling). These are globally valid and routable.
 - IPv4: IPv4 private range to connect with the final user (4to6 tunneling). They are assigned to the final users attached to a node in the mesh, when they transmit any packet that has to travel throughout the mesh it is encapsulated in an IPv6 packet (tunneling).

QMP

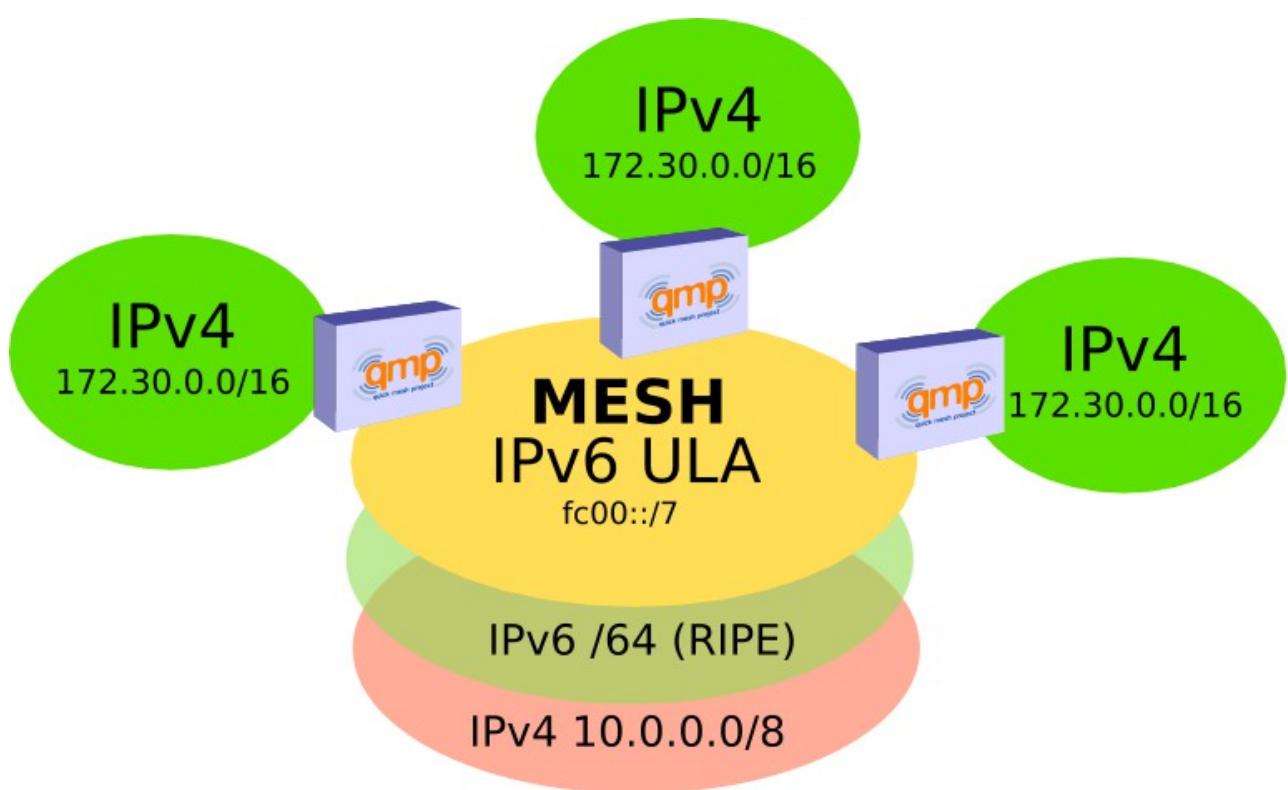

QMP


Modes

- *Roaming* for fast deployments:
 - All the access points in this mode will have the same IP and the same ESSID in order to allow users mobility, namely, they won't lose the connection although they switch from an AP to another.
 - Every AP implements a NAT and so, two users attached to different APs won't have direct vision between them.
- *Community*:
 - Every node will have a randomly assigned IPs range and will announce this range through the mesh.
 - There is not NAT, every user has direct vision with the others (1 hop away from the IPv4 network layer point of view), but mobility is not allowed (no roaming).

QMP

Roaming

Collaborative

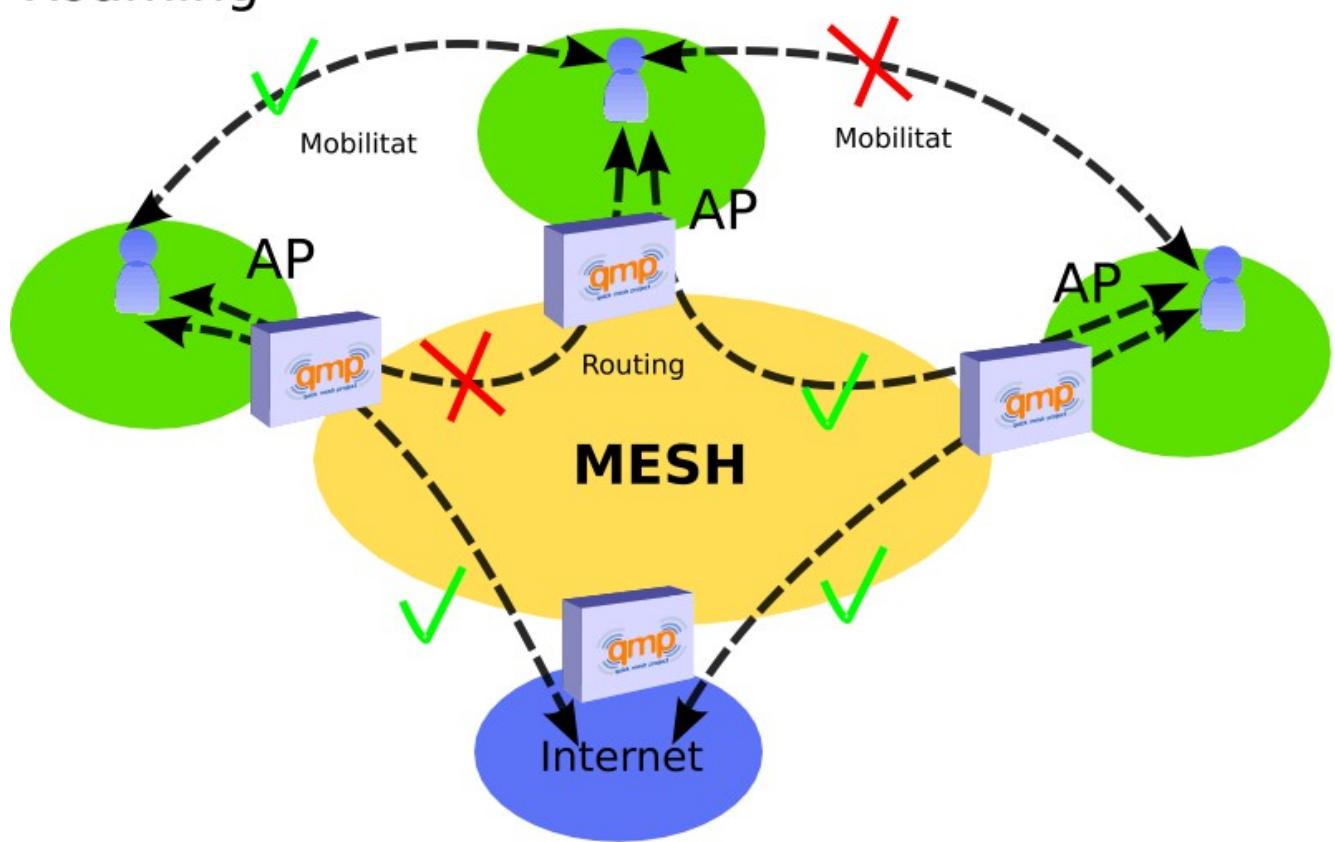

QMP

Dynamic Routing Protocol

- The QMP firmware, uses the following protocols:
 - BMX6 as the main DRP.
 - OLSR6 as a backup DRP.
 - Babel as a backup DRP but optional.
-
- All three use IPv6 ULA to talk to other nodes and are isolated at the link layer (MAC) using VLANs.




OLSR Optimized Link State Routing

QMP

BMX6

- Pro-active: Uses UDP flooding to periodically send Originator Messages (OGM) and build a routing table.
- Destination-sequenced, Distance-vector (DSDV): Every node just knows which neighbor is better to reach another, namely, they do not need to know the entire topology, just the best paths.
- Does not use IP as node identifier, it uses global identifiers using SHA2 hashing.

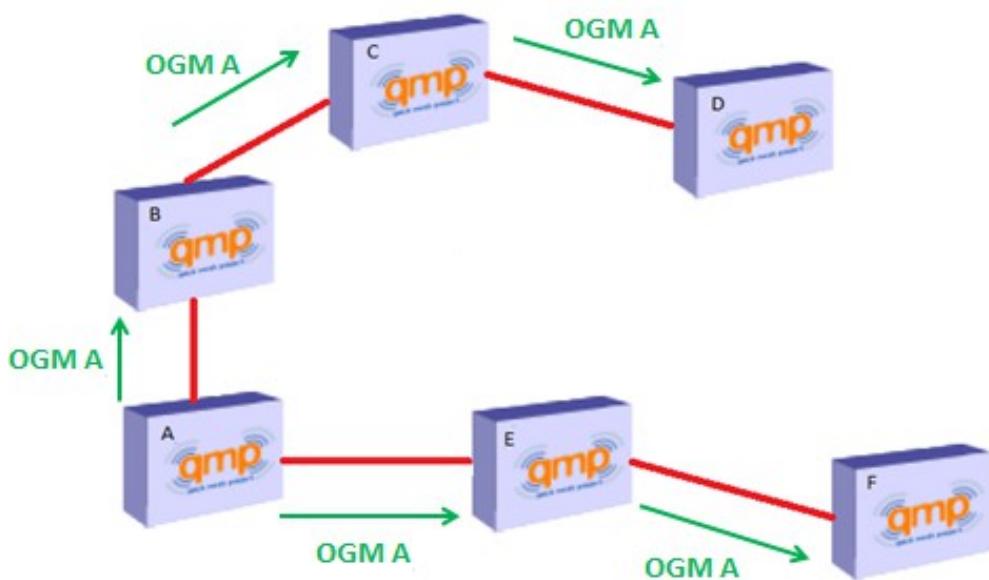

Best Path to A						
Step	B	C	E	D	F	
1	A	-	A	-	-	
2	A	B	A	-	E	
3	A	B	A	C	E	


QMP

Frame name	Description
HELLO ADV	Hello advertisement. Used for letting neighboring nodes detect the link quality in transmit direction (from sending to receiving node).
RP ADV	Rx probe advertisement. Used for reporting about reception rate of hello messages from neighboring nodes.
OGM ADV	OGM advertisement. Used for updating periodically route and metric information over the mesh.
OGM ACK	OGM acknowledgement. Used for acknowledging the previously reception of a full OGM ADV frame.

Mobile Node

- The main goal of creating a node which has mobility is giving coverage to zones or event that are not covered with the existing fixed infrastructure. And so it has a lot of social implications, for citizens and cities:
 - Giving Wi-Fi access to people in a concert or any other event (indoor or outdoors).
 - Allow people broadcast something taking place with their Smartphone (apps like bambuser) or using IP cameras.
 - Giving coverage in a protest, moving the node along with the people.
 - Etc!!
- We always need a fixed infrastructure to be able to expand the mesh by adding this node. Cities like Barcelona are creating this kind of infrastructures.

Mobile Node

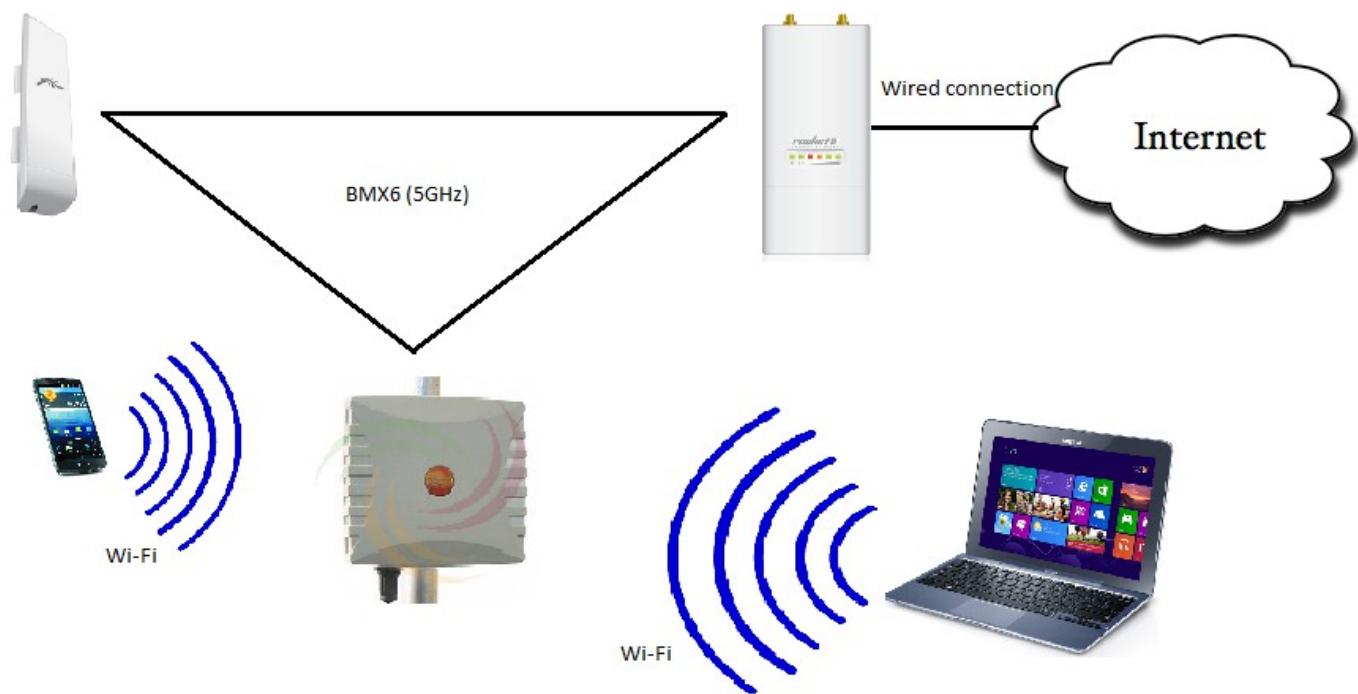

Information Sources

- Escrich, P. (2012, January). Quick deployment network using MANET. Retrieved March 4, 2013
- Escrich, P. (2012, November 17). Xarxes Mesh. Curs Guifi.net 2012. Retrieved March 5, 2013
- Mobile ad hoc network. (n.d.). In *Wikipedia*. Retrieved March 4, 2013, from http://en.wikipedia.org/wiki/Mobile_ad_hoc_network
- Starting a Community. (2013, January 11). In *Quick Mesh Project*. Retrieved March 5, 2013, from <http://qmp.cat/projects/qmp/wiki/Starting>
- Roaming-Community/Collaborative. (2012, June 26). In *Quick Mesh Project*. Retrieved March 5, 2013, from <http://qmp.cat/projects/qmp/wiki/Roaming-Collaborative>
- QMP users mailing list

