ÇINAR İTFAİYE

CNR- 2.000 LT FIRE FIGHTING VEHICLE



Type	Fire Fighting Vehicle
Bodywork	Modular
Water Tank	2000 liters AISI 304
Foam Tank	200 liters AISI 316L
Pump	NH25/
Capacity (Lt / min)	10 bar/2500lpm - 40bar/400lpm
Drive	PTO
Lighting Warning	American Lightbar with Siren System Interior Lighting 2 Fixed Projectors
First Respond Hose	1 unit
Reel Operation	Manual Unwinding – Electrical Rewinding 1" x 30m
Hose	
Nozzle	Jet / Fog Pistol

Büyükkayacık Mah. 5. Organize Sanayi Bölgesi 513.Sk. NO:19/1 Selçuklu/Konya / TÜRKİYE
Tel: 0332 3461286 /251 1973 Faks: 0332 2511974 E-mail: export@cinaritfaiye.com
www.cinaritfaiye.com

ÇINAR İTFAİYE

1-WATER TANK

- Capacity 2000LT
- AISI 304L with a minimum thickness of 4mm
- 2.5 inch ball valve for purging and draining.
- There is a sufficient number of breakwaters.
- There is a 500 mm diameter aluminum manhole cover for human entry.
- Transport pipe is available.

2- BODY

- consists of aluminum body
- Pump compartment is at the back
- Aluminum ladder for climbing on top of equipment

3- FIRE PUMP

- Pump configuration / normal pressure– and high pressure pump on one shafthaft
- Normal pressure / 1-stage centrifugal pump
- Performance NP / up to 2,500 lpm (660 USgpm) at 10 bar (150 psi)
- High pressure / 4-stage centrifugal pump
- Connection to high pressure / easy to switch on or off by connecting or disconnecting the water supply to the high pressure side
- Performance HP / up to 400 lpm (105 USgpm) at 40 bar (600 psi) (w/ 2 HP discharges)
- Material / corrosion resistant light alloy - anodized (Option: Gunmetal), pump shaft made out of stainless steel
- Sealing / maintenance-free mechanical sealing
- Priming pump / double acting piston pump - driven via a belt from the pump shaft (disengagable)
- Performance priming pump / 30% vacuum in 4 seconds (for 100 liters - 26.4 USgal) * ; 70% vacuum in 17 seconds (for 100 liters) *maximum vacuum: 90%

4-FIRE HOSE REEL

- Hose reel 25/60
- 30m long
- Working pressure 10 bar
- Maximum pressure 17 bar

5-ALARMS, SIGNALS and LIGHTING DEVICE:

- LED red and blue long row alarm light mounted on the top of the cabin.
- LED warning lights installed in series at the front, rear and top of the vehicle.
- A red circular warning light and a 100 watt column work light are installed in series behind the roof.
- LED lighting is available in the pump room.
- Signal lamps, front and rear parking lights and reflective signs on both sides of the truck rear as standard equipment
- Lighting on top of cabinets

6-PAINT

Equipment Ral-3000

Büyükkayacık Mah. 5. Organize Sanayi Bölgesi 513.Sk. NO:19/1 Selçuklu/Konya / TÜRKİYE
Tel: 0332 3461286 /251 1973 Faks: 0332 2511974 E-mail: export@cinaritfaiye.com
www.cinaritfaiye.com

7-CABIN

- There is a separate cabin for personnel.
- It is easily removable from the lower chassis.
- The floor covering is made of corrosion-resistant, non-slip material.
- Crew dimensions will be the most suitable type for the vehicle.
- There will be 3 seats with soft cushions.
- The seat depth will be at least 400mm and the seat height will be at least 400mm.
- The crew cabin will have 2 doors.
- There will be steps for access to the crew cabin.

8-PUMP SECTION


- It will be of dimensions suitable for the vehicle.
- The pump compartment will be made of aluminum.
- The roof will be made of non-slip sheet metal.
- An aluminum ladder will be provided for access to the roof.
- It will be equipped with water- and dust-proof lockable shutters.
- Space will be provided on the roof for suction hoses.
- The roof will be surrounded by a guardrail.

9-LIST OF EQUIPMENT TO BE PROVIDED WITH FIREFIGHTING EQUIPMENT

No. p.p.	Name	Quantity	Units of measurement
1	Hook for opening hydrant covers	1	pcs.
2	KP hook (fire hook)	1	pcs.
3	Universal wrench (K50-80, K100-150)	2	computer
4	Column KP	1	pcs.
5	Columnist's tool kit	1	computer
6	Suction nozzle for suction hose with check valve 5"	1	computer
7	GPS-600 generator	2	pcs.
8	Hydraulic elevator G-600 (with 3" half-nut)	1	pcs.
9	Sleeve water collector BC (2x3" 1x5")	1	pcs.
10	Transition pressure head 66x51 (GP65x50)	2	pcs.
11	Transition pressure head 77x66 (GP80x65)	2	pcs.

12	Transition pressure head 77x51 (GP80x50)	2	pcs.
13	Transition pressure head from 3" (77mm) to 5" (125mm)	1	pcs.
14	Multi-purpose hand-held pistol-type fire nozzle for generating streams and fog. 2 1/2" tip.	4	pcs.
15	Multifunctional hand-held fire nozzle with a GOST 70 head	2	pcs.
16	Portable fire monitor nozzle, water flow rate not less than 40 l/s.	1	pcs.
17	Three-way sleeve branch RT-70 (inlet 1x3", outlets (side 2x2", central -1x3"))	1	pcs.
18	Sleeve clamp ZPR-80	4	pcs.
19	Sleeve delay	4	pcs.
20	Fire hose pressure RPM(P)-80-1.6-U1, L=20 m with hose pressure heads GRN-80	8	pcs.
21	Fire hose pressure RPM(P)-65-1.6-U1, L=20 m with hose pressure heads GRN-65	4	pcs.
22	Fire hose pressure RPM(P)-50-1.6-U1, L=20 m with hose pressure heads GRN-50	6	pcs.
23	Fire hose suction B-2-125-10-HL, L=3 m	3	pcs.
24	Fire hose, suction and delivery, B-2-75-10-HL, L=3 m	2	pcs.
25	Hose KSh-2-32-3-HL for filling foam concentrate, L=4 m, with connecting fittings made of aluminum alloy	1	pcs.
26	Sleeve transition bridge MPR80	2	pcs.
27	Heat-reflective suit TOK-200, (ALPHA- Maritex fabric)	3	computer
28	High pressure nozzle with pistol grip 200 l/min at 40 bar	1	pcs.
29	Grounding device ZPPM-50 L-20	1	pcs.
30	Loudspeaker signaling system	1	computer
31	High pressure hose reel (40 bar) hose length 40 m, with tip (barrel)	1	pcs.
32	Electric flashlight with charger	4	pcs.
33	Voltage converter 24V – 12V	1	pcs.
34	First aid reel hose 40m	1	pcs.

10- TECHNICAL DRAWING

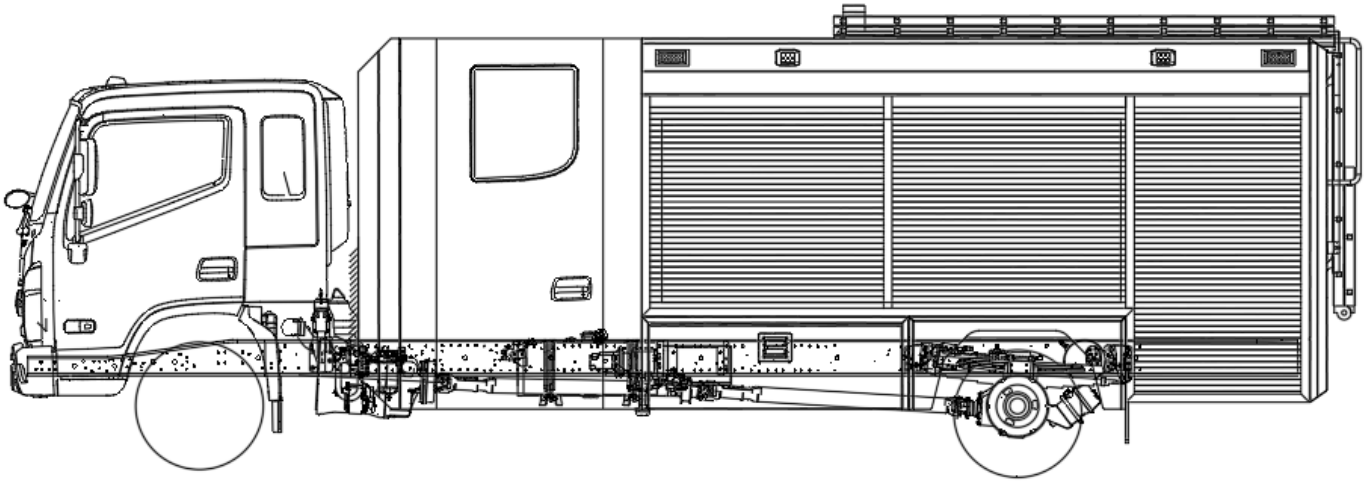


For visual reference purposes only.

11-PRODUCTION





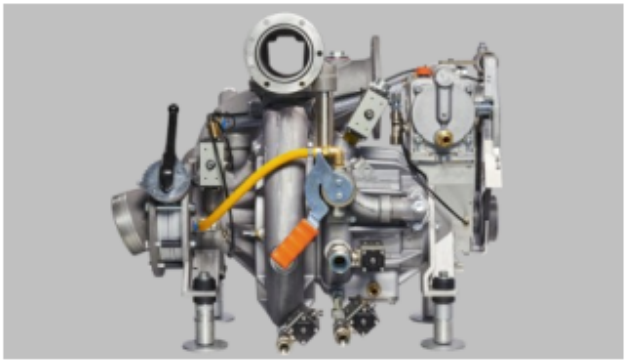

Normal– and High Pressure Stage on one common shaft, activation of high pressure by opening the water supply from the NP side



Double acting Piston Priming Pump KAP driven via belt from the main pump drive shaft, optional with automatic priming







Büyükkayacık Mah. 5. Organize Sanayi Bölgesi 513.Sk. NO:19/1 Selçuklu/Konya / TÜRKİYE
Tel: 0332 3461286 /251 1973 Faks: 0332 2511974 E-mail: export@cinaritfaiye.com
www.cinaritfaiye.com