CCI CORPORATE GUIDELINE

2025

Visual Applications for Plants


CCI

Basic Rules

- Out of Use Logos



Out of use.

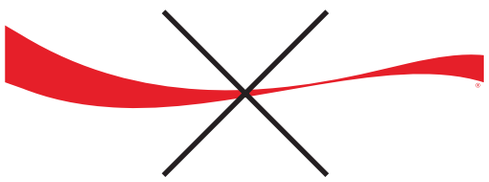

Out of use.



Out of use.

All images and logos within the scope of the AMBASSADOR program are also out of use.



Out of use.



Out of use.

CCI Logo with Anadolu Group
- Office Reception / Mandatory

The reception area, being the center of the office and plant, is where the CCI guests and business partners get their first impressions about our corporate identity and our vision.

The design of the reception area should be open and welcoming, and it should reflect the spirit of the present times.

The use of our corporate colors in light tones creates a relaxed atmosphere. Current applications are presented to the guests in this area.



10 ribbon red CCI logo
with Anadolu Group logo
on white background



Metallic silver 10 ribbon red CCI logo
with Anadolu Group logo
on steel background


CCI Logo with Anadolu Group

- Flag Usage in Türkiye / Mandatory

Only use 10 ribbon multicolor logo

For plant entrances

1- Türkiye Flag
2- Anadolu Group Flag
3- CCI Flag

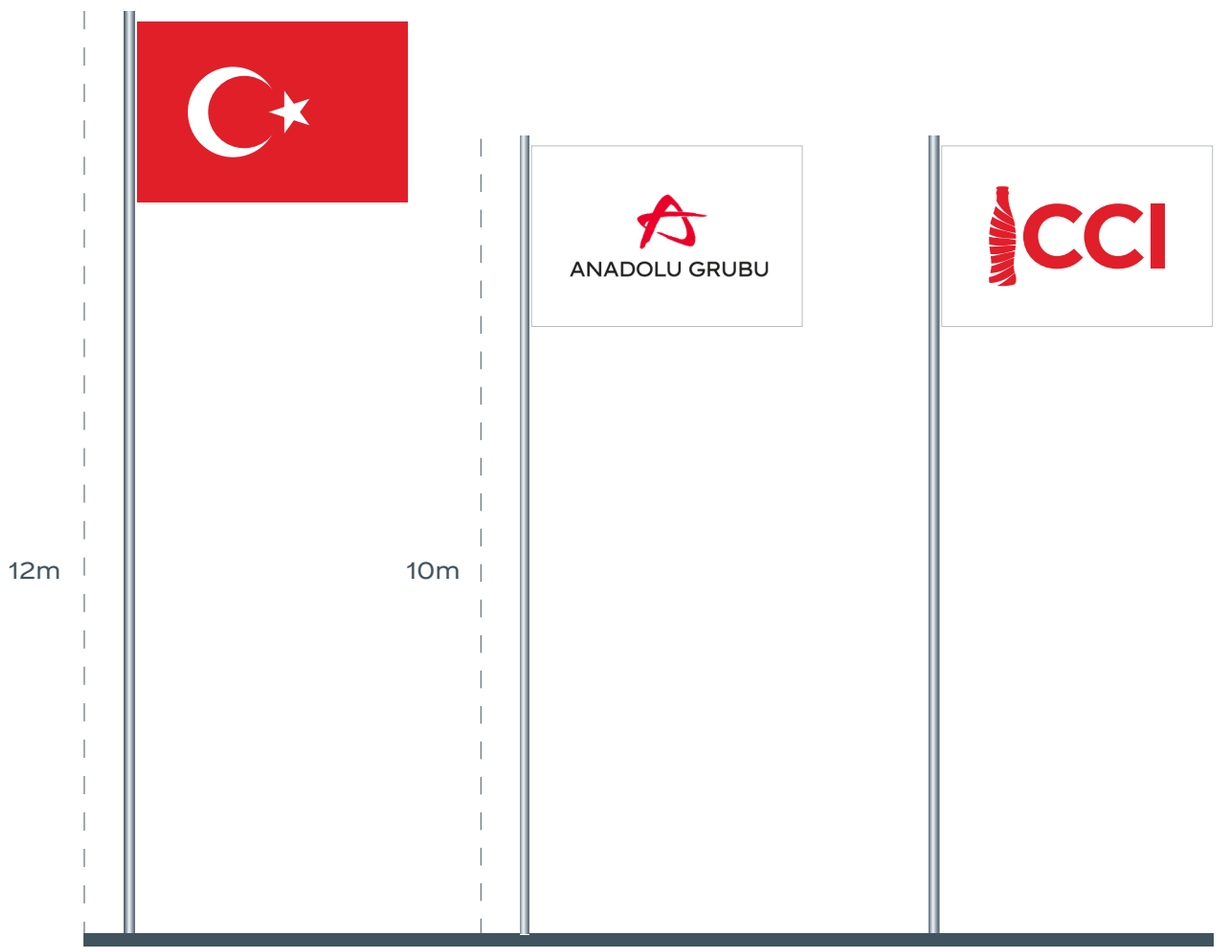

The height of the Türkiye flag will be 12 meters.

The height of the Anadolu Group, CCI flags will be 10 meters.

CCI Logo with Anadolu Group


- Flag Usage in Countries / Mandatory

Only use 10 ribbon multicolor logo

Following flags should be used for plant entrances.

1- Country Flag
2- Türkiye Flag
3- Anadolu Group Flag
4- CCI Flag

If flag poles are not even, and one is higher, this one can be reserved for the country flag.

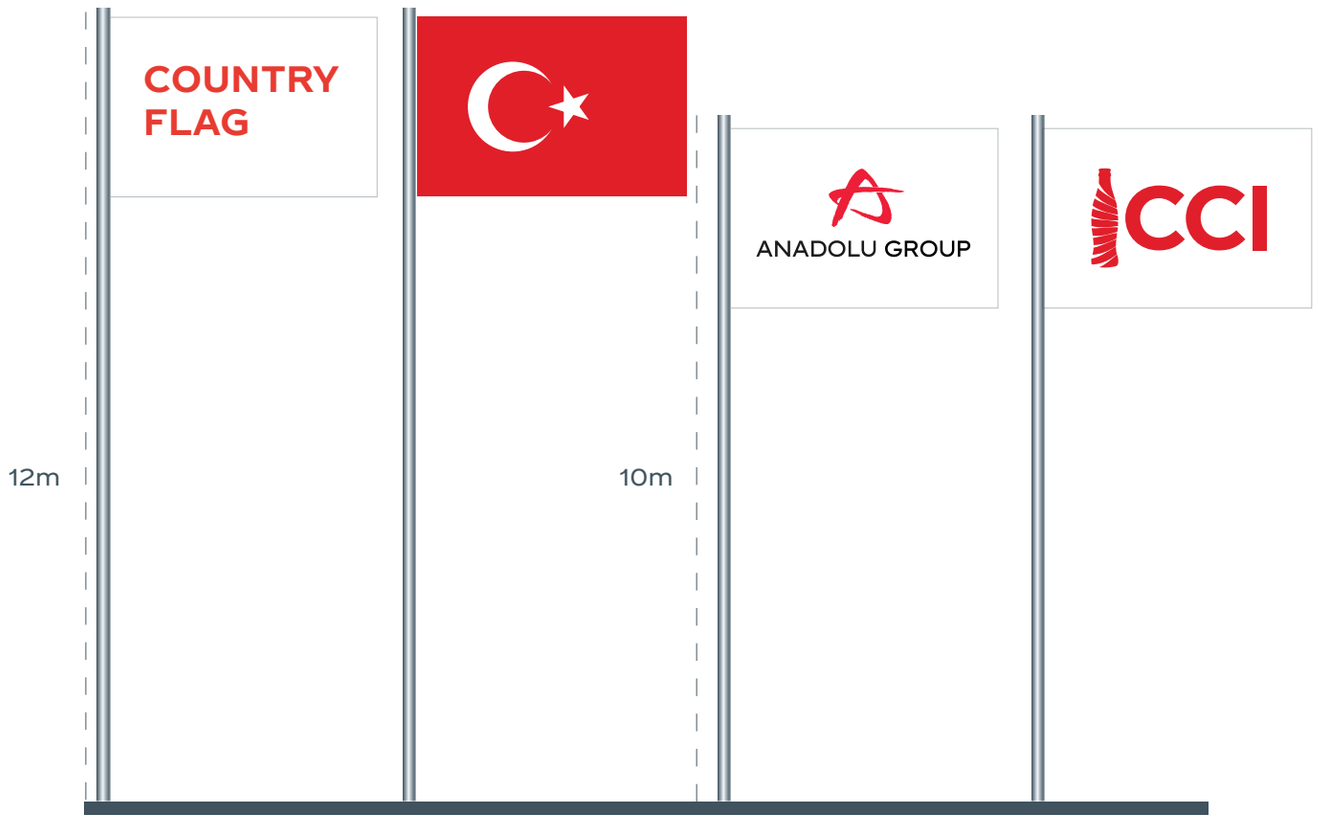

The height of the Country and Türkiye flags will be 12 meters.

The height of the Anadolu Group, CCI, and other corporate flags will be 10 meters.

Flag Adaptation


- Country (Example 2)

Following flags should be used for plant entrances.

1- Country Flag
2- Türkiye Flag
3- Anadolu Group Flag
4- CCI Flag
5- Coca-Cola Flag

Any other current Coca-Cola product flags may also be added if neccessary.

If flag poles are not even, and one is higher, this one can be reserved for the country flag.

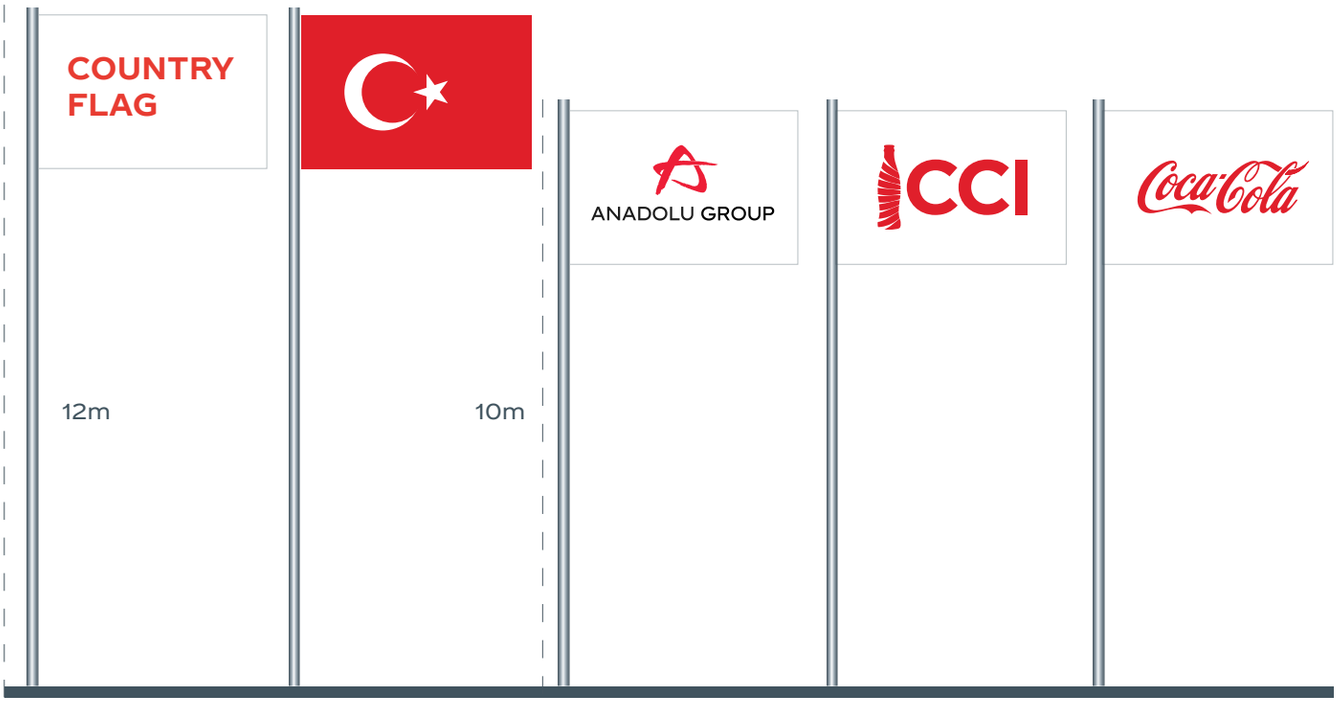


The height of the Country and Türkiye flags will be 12 meters.

The height of the Anadolu Group, CCI, and Coca-Cola flags will be 10 meters.

CCI Logo usage in Flags
- Swallowtail Flag


Only use 10 ribbon bottle logo

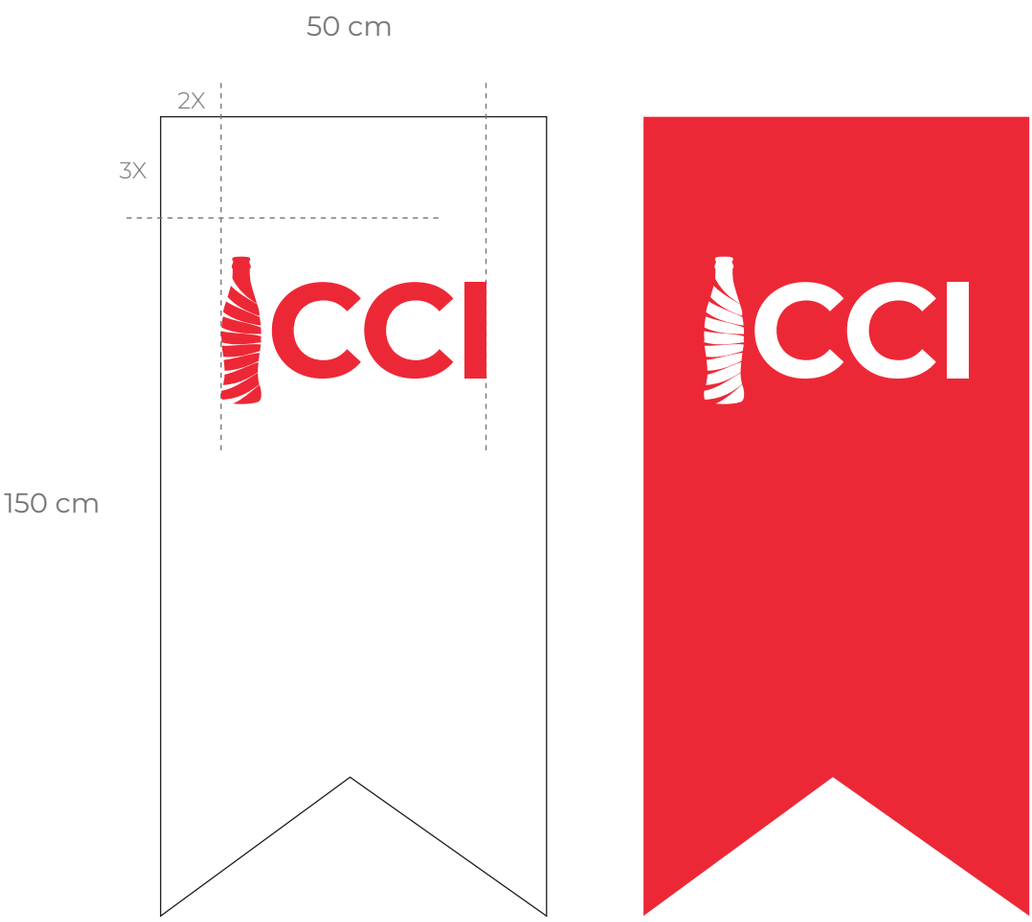

The same measurements apply to the country versions of the logo as well.

CCI Logo usage in Flags
- Pennant

Only use 10 ribbon bottle logo

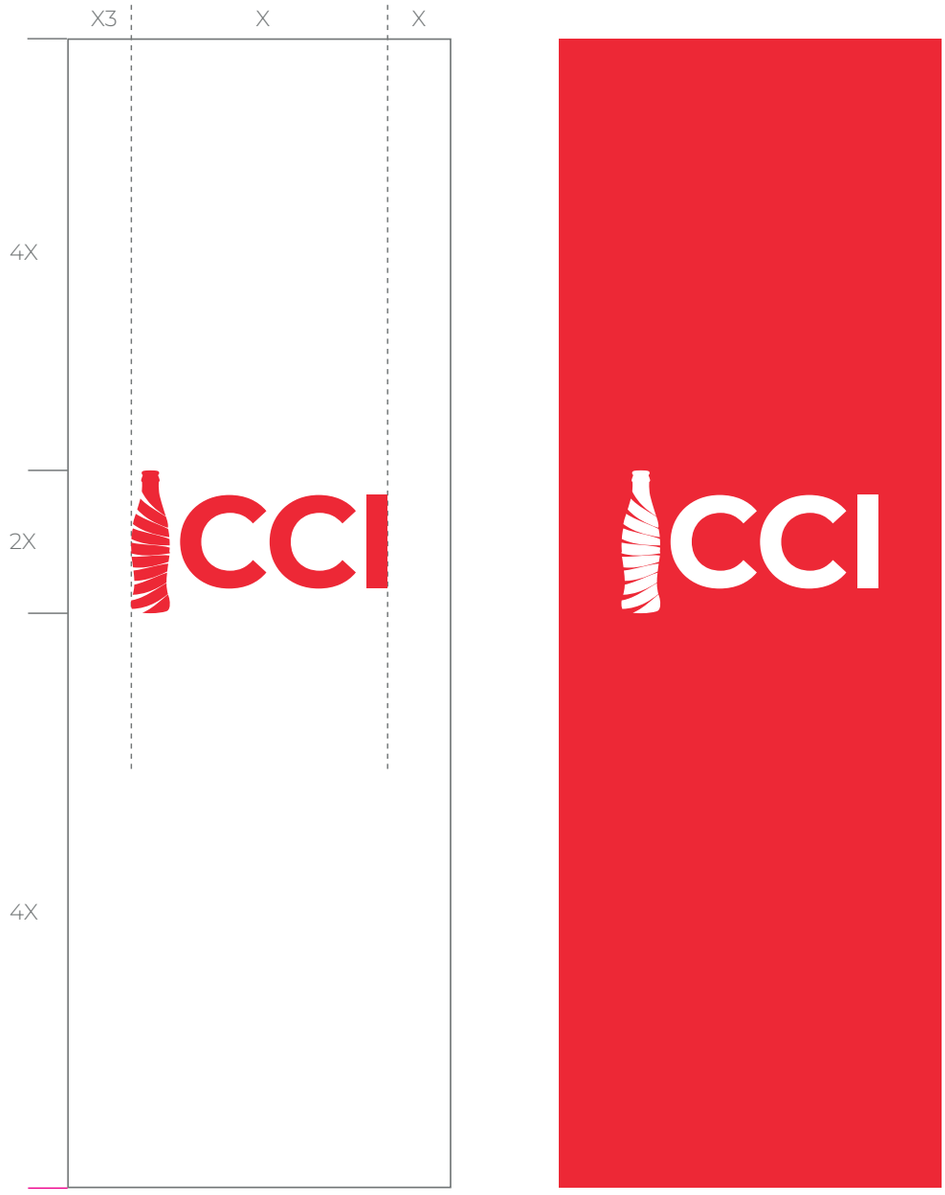


The same measurements apply to the country versions of the logo as well.

CCI Logo usage in Flags
- Feather Flag

Only use 10 ribbon bottle logo

Size: Widht 75cm
Height 300cm

Example 1

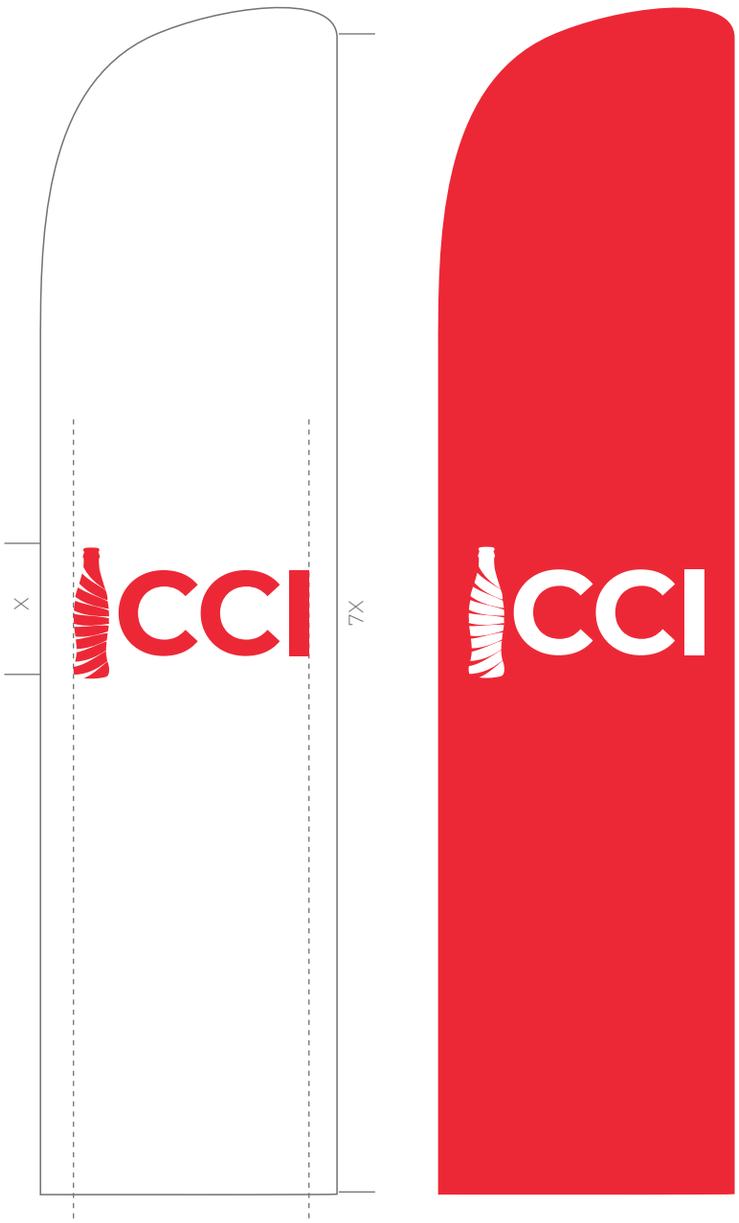


The same measurements apply to the country versions of the logo as well.

CCI Logo usage in Flags
- Feather Flag (Optional)

Only use 10 ribbon bottle logo


Size: Widht 75cm
Height 300cm

Example 2

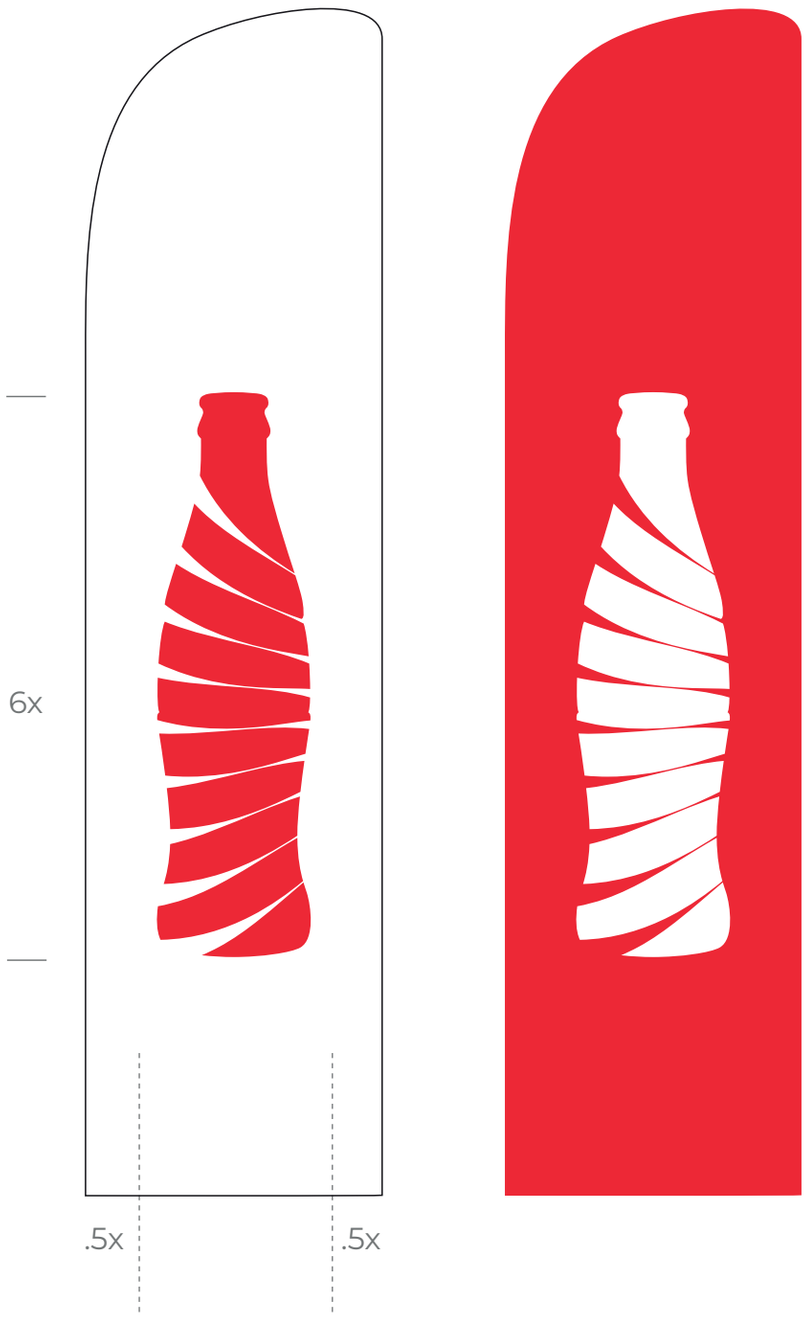

CCI Logo usage in Flags
- Triangular Flag

Only use 10 ribbon bottle logo

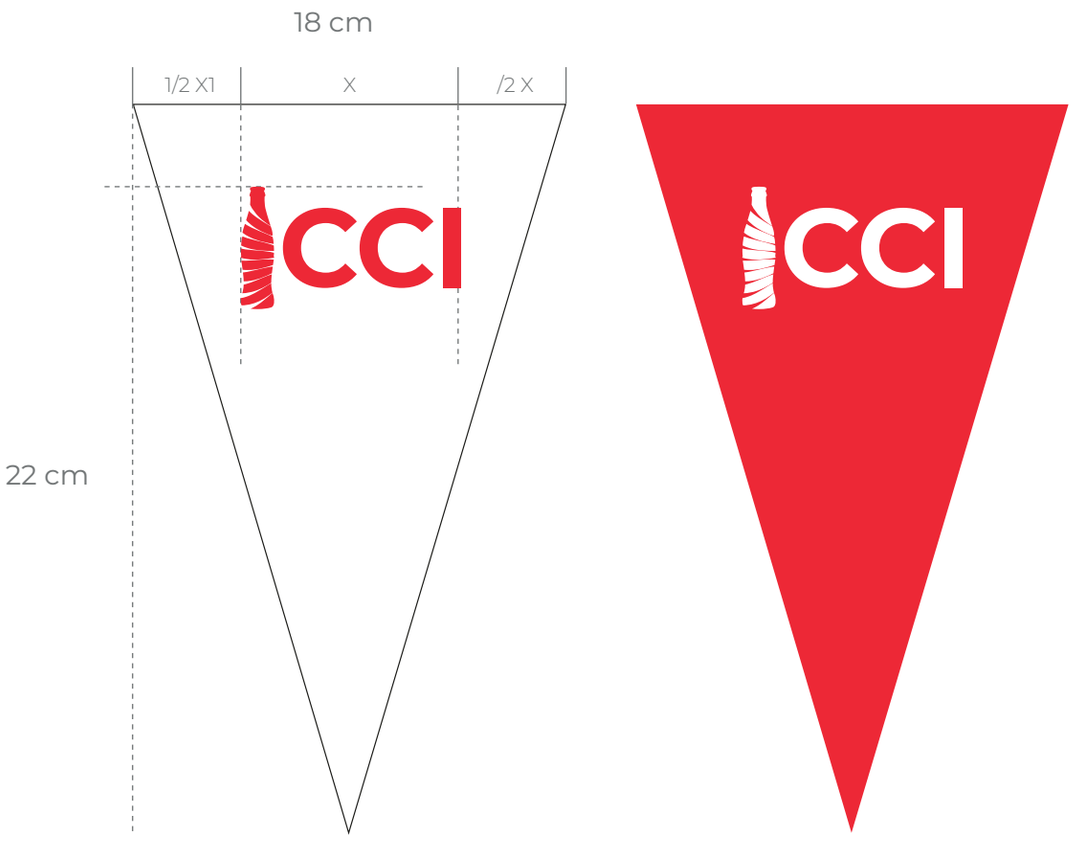

The same measurements apply to the country versions of the logo as well.

CCI Logo usage in Flags
- Roll-up

Size: Widht 85cm
Height 200cm



The same measurements apply to the country versions of the logo as well.

CCI Logo with Anadolu Group

- Reception Desk

Only use 10 ribbon red bottle logo with

For the event organized by CCI, the logo placement is shown in Example 1.

For the event organized by Anadolu Group, the logo placement is shown in Example 2.

The placement of the logos may vary depending on the key visual of the event.




Basic Rules

- Coca-Cola Logotype

Corporate Signs

Standards for the application of the Coca-Cola logotype on plant gate, facade and open areas are stated below. No background color is allowed except white and red.

Logotype Mode of Use
The minimum space between the Coca-Cola logotype and the texts or other graphics that surround the logotype are stated below.

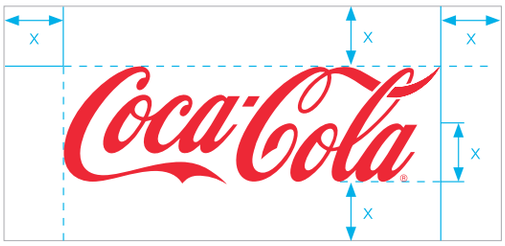



Primary Mode of Use



Secondary Mode of Use



Mode of Application
Only embossed Plexiglas should be used for the Coca-Cola logotype placed on the plant's main gate and building facades. There is no requirement for having lighting from behind in the main gate of plant buildings.

Basic Rules

- Coca-Cola Logotype

Core Brand Elements: Red Disk

Clear Space


Surround the Red Disk with clear space that is, at a minimum, the distance from the bottom of the “o” to the top of the “C” in “Coca.” This clear-space area is shown at ‘x’.

Cropping

• Make every attempt to use the Red Disk in full.
• When it is necessary to crop the Red Disk, crop only to the extent that:
- The integrity of the Red Disk and its three-dimensional aspects are retained.
- The Spencerian Script always remains intact.
Photography is allowed to overlap the Disk but should not touch more than two letters of the Spencerian Script.

Lock-ups

Do not use the Red Disk in lock-ups. The Red Disk is for standalone use only. It must never be combined with other brands or properties.

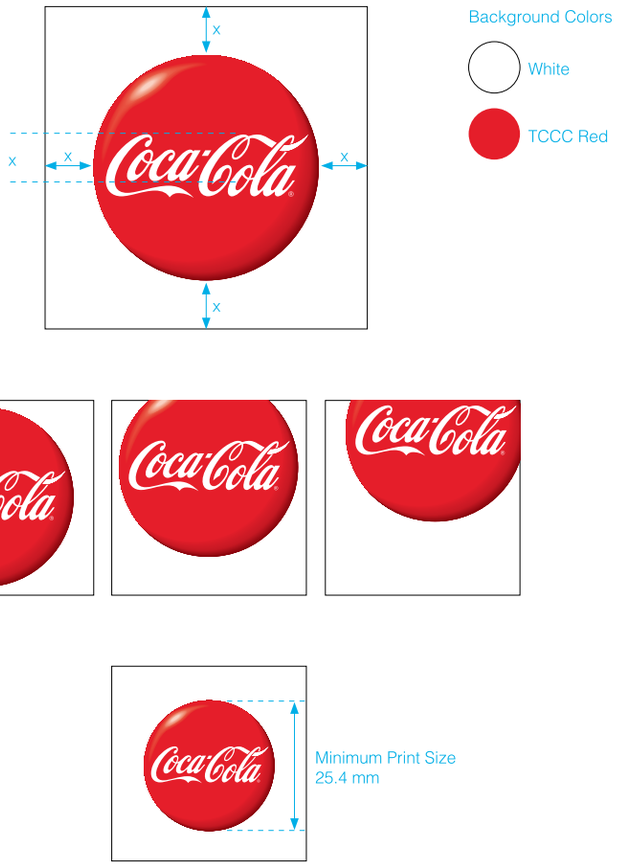

Basic Rules
- Lock-up Specifications

The lock-up of the Dynamic Ribbon and Spencerian Script creates a perfectly balanced tension between Brand icons that represent modernity and heritage.

Space Ratio Between the Script and Ribbon
When using the Spencerian Script with the Dynamic Ribbon, the space between the two must be “hyphen height” - i.e., equal to the height of the hyphen connecting “Coca” and “Cola”.
• The Script is always centered over the middle of the Dynamic Ribbon.
• The Dynamic Ribbon and the Script never overlap.





Basic Rules

- Color Palette

Departmental and Safety Palette

The visualization of the locations utilizes the corporate design palette. The secondary palette color standards are defined only to be used in graphics and coloring aimed at giving information.

Icons and symbol must be used with the TCCC Red and Global White colors defined in the primary palette with the exception of special cases.

Primary Palette Usage

Use the TCCC Red in its equivalents for all signatures, symbols, and tags. When placed over solid strong colors, white versions of signatures, symbols, and tags may be used. TCCC Platinum should be used for typography and information strokes.

Secondary Palette Usage

Use only the secondary colors shown. Only use in instances such as information graphics, charts, graphs. Do not use green for primary communications. Red is our green.

Primary Palette - CCI

TCCC Red

C 04	R 255	Pantone
M 100	G 255	Special Match
Y 95	B 255	RAL
B 00		3020

Global White

C 00	R 004	Pantone
M 00	G 100	White
Y 00	B 095	RAL
B 00		White

TCCC Platinum

C 23	R 069	Pantone
M 02	G 085	432 C
Y 00	B 096	RAL
B 77		7015

Secondary Palette - CCI Multicolor Bottle

Orange

C 00	R 246	RAL
M 56	G 138	1037
Y 90	B 051	
B 00		

Dark Orange

C 00	R 219	RAL
M 100	G 009	2009
Y 34	B 098	
B 08		

Pomegranate Red

C 04	R 219	RAL
M 100	G 009	4010
Y 34	B 098	
B 08		

Violet Purple

C 00	R 180	RAL
M 30	G 030	4006
Y 55	B 142	
B 00		

Purple

C 00	R 125	RAL
M 00	G 065	4008
Y 051	B 153	
B 153		

Basic Rules

- Color Palette

Tertiary Pallet

The tertiary color palette should only be used in informational graphics and tables. Green color should not be used for primary communications, only TCCC Red is applicable.

Tertiary Pallet

Orange

C 00 M 56 Y 90 B 00 — Pantone 1585 C

Yellow

C 00 M 06 Y 95 B 00 — Pantone 108 C

Green

C 50 M 00 Y 100 B 00 — Pantone 376 C

Light Orange

C 00 M 30 Y 55 B 00 — Pantone 7410 C

Light Yellow

C 00 M 00 Y 51 B 00 — Pantone 100 C

Light Green

C 16 M 0 Y 46 B 0 — Pantone 373 C

Blue

C 89 M 43 Y 00 B 00 — Pantone 285 C

Purple

C 61 M 89 Y 0 B 0 — Pantone 2593 C

Pink

C 00 M 100 Y 34 B 80 — Pantone 234 C

Light Blue

C 35 M 09 Y 00 B 00 — Pantone 283 C / RAL 7015

Light purple

C 22 M 33 Y 00 B 00 — Pantone 2563 C

Light Pink

C 00 M 28 Y 00 B 00 — Pantone 217 C

Brown

C 30 M 56 Y 100 B 37 — Pantone 463 C

Black

C 00 M 00 Y 00 B 99 — Pantone 426 C

Light Brown

C 00 M 04 Y 50 B 11 — Pantone 4535 C

Gray

C 00 M 00 Y 00 B 31 — Pantone Cool Gray 6 C

Basic Rules

- Color Palette

Departmental and Safety Palette

Purple and orange have been added as secondary corporate colors and assigned to main departments at each location. They help with navigation and are used in departmental wall designs and information panels.

Safety and quality signs follow legally required safety colors, not corporate design colors. This includes all icons and the red warning symbol on important notices. Fluorescent green is only used for the safety vest icon.

Office walls should be painted off-white RAL 9016 Traffic White.

Departmental Palette

Management

C 00 M 100 Y 34 B 80 — Pantone 234 C

Production

C 50 M 00 Y 100 B 00 — Pantone 376 C

Store/Logistics

C 00 M 56 Y 90 B 00 — Pantone 1585 C

Technical Service

C 89 M 43 Y 00 B 00 — Pantone 285 C

Maintenance & Repair

C 00 M 06 Y 95 B 00 — Pantone 108 C

Quality Assurance

C 61 M 89 Y 00 B 00 — Pantone 2593 C

Office Walls

RAL 9016

Safety Palette

RAL Signal Black

C 100 M 90 Y 100 B 80 — RAL 9004

RAL Signal White

C 00 M 00 Y 00 B 00 — RAL 9003

RAL Signal Red

C 20 M 100 Y 90 B 10 — RAL 3001

RAL Traffic Red

C 00 M 100 Y 100 B 10 — RAL 3020

RAL Signal Blue

C 100 M 40 Y 00 B 40 — RAL 5005

RAL Signal Yellow

C 05 M 20 Y 90 B 00 — RAL 1003

RAL Signal Green

C 90 M 10 Y 80 B 00 — Pantone 6032

RAL Sulfur Yellow

C 10 M 00 Y 90 B 00 — RAL 1016

Basic Rules

- Information Hierarchies

Classifications

Signs are messages to the observer. They indicate the direction, describe content, or warn about hazards.

To ensure that the message and importance of a sign are immediately apparent, the information to be transmitted is organized in hierarchies and visualized accordingly. The first step before producing a new sign is to clarify the nature of the information to be transmitted.

Information is classified according to the list as follows.

Category 1
Information

General signs and instructions that do not require increased attention.

Examples: Designations of buildings, tools, materials, etc., and general instructions.



Category 2
Attention! Important information

Take note! This is information that must be understood. Signs with this content must not be overlooked. Following the instructions they convey is crucial to maintaining quality and safety.

Examples: Hygiene zones, critical control points, hygiene areas, restricted areas, etc.



Category 3
Attention, danger! Safety warnings

Attention! This type of information pertains to the reader's safety. It must be noticed as otherwise the reader's life and health would be at risk.

Examples: Caution, acid, markings identifying hazardous areas.



Category 4
Policies

They will be used as permanent announcements in convenient locations to communicate policies, directives and instructions of CCI to employees.



Basic Rules

- Information Hierarchies

Visualization

Information

Simple information is shown in TCCC Platinum text on signs or directly on respective surface.

Attention! Important Information

Important information is emphasized by signal red and signal white border slanted. Lettering is in TCCC Platinum.

Attention, Danger! Safety Warning

Information important for the safety of the target group is displayed in a black and yellow color combination. Signs are given a safety identifier slanted to the right along the upper edge. Hazards on the floor, wall, or in the room are also identified with this marking.

Category	Text Color	Stroke or Line and Background Color	Example
Information	**Text** **TCCC Platinum** **Pantone** 432 C **C**23 **M**2 **Y**0 **B**77	**Stroke** **TCCC Platinum** **Pantone** 432 C **C**23 **M**2 **Y**0 **B**77 **Background** **Global White** **Pantone** White **C**0 **M**0 **Y**0 **B**0	INFORMATION
Attention! Important Information	**Text** **TCCC PLATINUM** **Pantone** 432 C **C**23 **M**2 **Y**0 **B**77	**Border Slanted** **Signal Red** **RAL** 3001 **C**20 **M**100 **Y**90 **B**10 **Background** **Signal White** **RAL** 9003 **C**0 **M**0 **Y**0 **B**0	HYGIENEZONE
Attention, Danger! Safety Information	**Text** **BLACK** **Pantone** 426 C **C**0 **M**0 **Y**0 **B**99	**Border Slanted** **Signal Black** **RAL** 9004 **C**100 **M**90 **Y**100 **B**80 **Background** **Signal Yellow** **RAL** 1003 **C**5 **M**20 **Y**90 **B**0	ATTENTION
Policies	**Text 1** **TCCC Platinum** **Pantone** 432 C **C**23 **M**2 **Y**0 **B**77 **Text 2** **TCCC Red** **Pantone** Special Match **C**4 **M**100 **Y**95 **B**0	**Stroke** **TCCC Red** **Pantone** Special Match **C**4 **M**100 **Y**95 **B**0 **Background** **Global White** **Pantone** White **C**0 **M**0 **Y**0 **B**0	POLICIES

Basic Rules
- Format and Grids

Once the information hierarchy has been established, the size is determined according to the space available and the appropriate format category is selected.

The format categories are based on different modules. These modules determine the respective design grid. The grid in turn determines the respective corner radius, the height of the attention of safety identifier, and the font sizes.

Modules

The minimum number of modules should be 4 in case of a single line. The width should be adjusted according to the text length and space.


Attention Identifier

The attention identifier always has a height of 1 module.


Corner Radius

The corner radius is 1/2 module in every format.

Modules

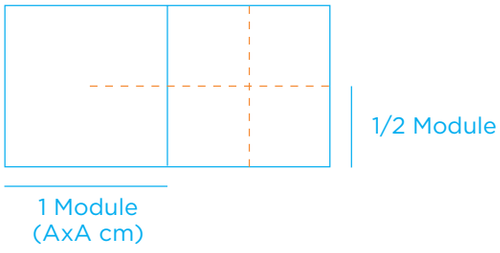


Attention Identifier



Corner Radius

Example

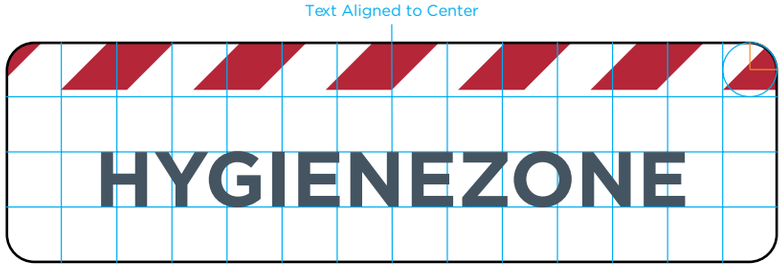

Basic Rules
- Format and Grids

The standards regarding the use of modules and warning lines are stated below.

The minimum height of a safety sign should be 4 modules.The width of a warning sign should be consistent with the warning text. Warning lines cannot be cut in half while adjusting width. Width should be adjusted so that a space of 1 module is left both before and after the text and that the warning line is fully visible.

Modules should never be used in half or without scale while determining the size of the signboard.


Basic Rules

1- Minimum height should be 4 modules.
2- Modules should be used as whole.
3- Number of module should be determined so as to allow full visibility of the warning lines.
4- Width should be determined to include an entire module and an entire warning line starting from the end of the text in front.
5- This application can be proportionally scaled for all sizes.

Information



Attention! Important Information

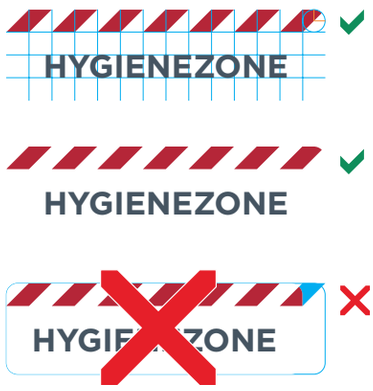

Attention, Danger! Safety Warning



Basic Rules
- Instructions and Forms

Policy, directive and instruction applications will be done according to the following standards.

Measures

2 sizes will be used for policy, directive and instruction applications.

1) A4 size (210x297 mm)

2) A3 size (297x420 mm)

Both sizes can be used as landscape or portrait as necessary.

Frame and Margins

External frame of 15mm in TCCC Red color should be applied for both sizes.

The margin between the frame and the text should be 10mm on all four sides.


Font size should be determined according to the text length and importance, and should allow easy reading.


Font Colors and Type

2 font colors can be used as follows:
1) TCCC Red, should be used for the main heading and sub-headings.


2) TCCC Platinum, should be used for the main text.

Gotham family should be used as the font type.

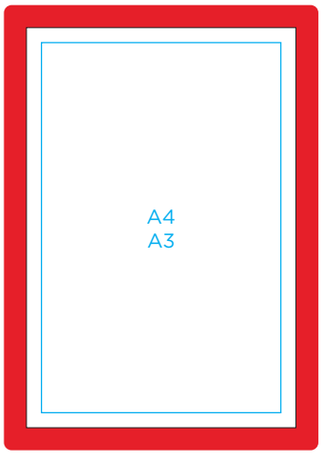

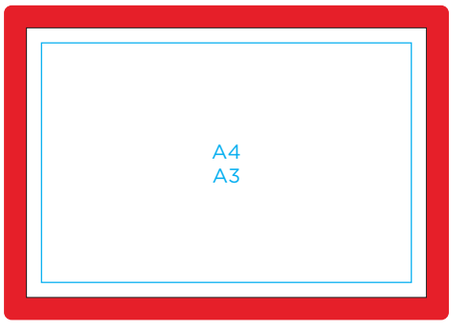



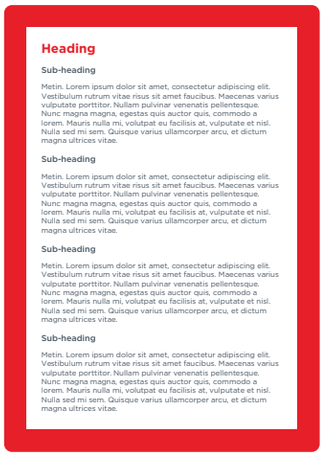



Basic Rules
- Arrows

The arrows are available to identify the direction.

Standard Arrow

The standard arrow is generally used as a direction indicator. It may be used alone or in combination with text.

Individual Signs

On individual signs it is used in the directions right, left, and straight ahead. Depending on the positioning of the sign, a left-aligned or right-aligned arrow is used.


Guides

On signs or steles indicating direction, the arrow is twice as high as the text. It does not appear directly adjacent to the text but is positioned at a defi ned distance above and to the left of it.

Standart Arrow





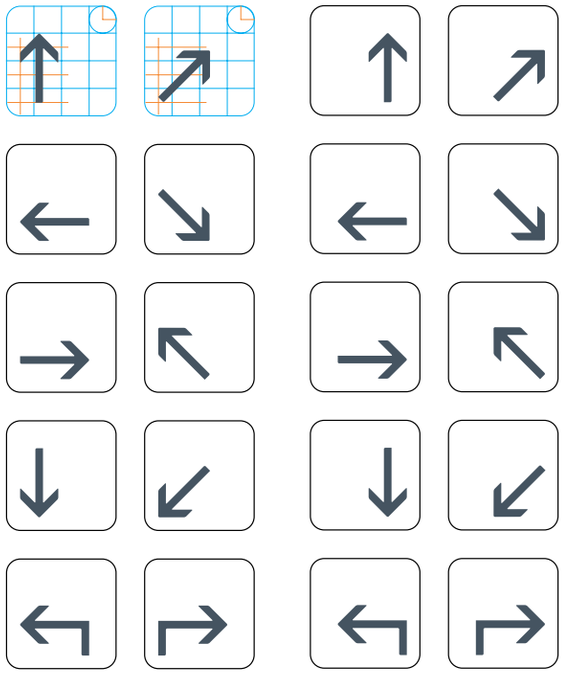

Basic Rules

- Safety Signs

Prohibitory Signs

As per the Health and Safety Signs Regulation No.28762 dated 11 September 2013; the minimum requirements regarding signboards are described in this guide as “Compulsory Signs”. Signs that are not classified as “Compulsory Signs” are added to the sign system as required by the needs of the company and are classifi ed as “Additional Signs”.

Round shape. Black pictogram on white background, red edging and diagonal line (the red part to take up at least 35% of the area of the sign).

Prohibitory Signs have been prepared according to the laws and regulations of the Republic of Türkiye. These signs need to be revised and adapted to the laws and regulations of the specific country where they will be used.

Compulsory Prohibitory Signs


No smoking


Smoking and naked flames forbidden


No access for pedestrians


Do not extinguish with water



Not drinkable


No access for unauthorized persons


No access for industrial vehicles


Do not touch


Do not touch moving parts


Do not remove protectors

Additional Prohibitory Signs


Do not Wear Jewelry


No Eating or Drinking


Forbidden to Take Photography

Basic Rules

- Safety Signs

Warning Signs

As per the Health and Safety Signs Regulation No.28762 dated 11 September 2013; the minimum requirements regarding signboards are described in this guide as “Compulsory Signs”. Signs that are not classified as “Compulsory Signs” are added to the sign system as required by the needs of the company and are classifi ed as “Additional Signs”.

Triangular shape. Black pictogram on a yellow background with black edging (the yellow part to take up at least 50% of the area of the sign).

Warning Signs have been prepared according to the laws and regulations of the Republic of Türkiye. These signs need to be revised and adapted to the laws and regulations of the specific country where they will be used.

Compulsory Warning Signs



Flammable material or high temperature | Explosive material | Toxic material | Corrosive material | Radioactive material | Overhead load



Industrial vehicles | Danger: Electricity | General danger | Laser beam | Oxidant material | Non-ionizing radiation



Strong magnetic field | Obstacles | Drop | Biological risk | Low temperature | Harmful or irritant material

Additional Warning Signs



High temperature | Hot Metal | Gas Tubes | High Voltage | Slippery surface | Automatic gate

Basic Rules

- Safety Signs

Mandatory Signs

As per the Health and Safety Signs Regulation No.28762 dated 11 September 2013; the minimum requirements regarding signboards are described in this guide as “Compulsory Signs”. Signs that are not classified as “Compulsory Signs” are added to the sign system as required by the needs of the company and are classifi ed as “Additional Signs”.

Round shape; white pictogram on a blue background (the blue part to take up at least 50% of the area of the sign).

Mandatory Signs have been prepared according to the laws and regulations of the Republic of Türkiye. These signs need to be revised and adapted to the laws and regulations of the specific country where they will be used.

Compulsory Mandatory Signs


Eye protection must be worn


Safety helmet must be worn


Safety gloves must be worn


Respiratory equipment must be worn


Safety boots must be worn


Pedestrians must use this route


Safety overalls must be worn


Face protection must be worn


Safety harness must be worn


General mandatory sign (to be accompanied where necessary by another sign)

Additional Mandatory Signs


Face mask must be worn


Dust mask must be worn


Hair protection must be worn


Ear protection must be worn


Ear plugs must be worn


Wash handsH


and Disinfectant


Hygienic Doormat


Overshoe must be worn


Safety jacket must be worn

Basic Rules

- Safety Signs

Emergency Escape and First-Aid Signs

As per the Health and Safety Signs Regulation No.28762 dated 11 September 2013; the minimum requirements regarding signboards are described in this guide as “Compulsory Signs”. Signs that are not classified as “Compulsory Signs” are added to the sign system as required by the needs of the company and are classifi ed as “Additional Signs”.

Rectangular or square shape. White pictogram on a green background (the green part to take up at least 50% of the area of the sign). The signs above emergency exits must be lighted.

In the areas where the natural light is low, emergency exit signs must be used with reflector material or be lighted.

In the case of a power outage or the need to cut power, lighted signs must be kept on using backup energy sources. Lighted signs should be reusable.

Emergency escape and First-Aid Signs have been prepared according to the laws and regulations of the Republic of Türkiye. These signs need to be revised and adapted to the laws and regulations of the specific country where they will be used.

Emergency Escape and First-aid Signs









Emergency exit/escape route signs



Supplementary ‘This way’ signs for emergency exits/escape routes



Stretcher



Safety shower



Eyewash



Emergency telephone for first-aid or escape



First-aid



Additional Emergency Escape and First-aid Signs







Basic Rules

- Safety Signs

Firefighting Signs

As per the Health and Safety Signs Regulation No.28762 dated 11 September 2013; the minimum requirements regarding signboards are described in this guide as “Compulsory Signs”. Signs that are not classified as “Compulsory Signs” are added to the sign system as required by the needs of the company and are classifi ed as “Additional Signs”.

Rectangular or square shape. White pictogram on a red background (the red part to take up at least 50% of the area of the sign).

In the areas where the natural light is low, firefighting signs must be used with reflector material or be lighted.

Firefighting Signs have been prepared according to the laws and regulations of the Republic of Türkiye. These signs need to be revised and adapted to the laws and regulations of the specific country where they will be used.

Compulsory Firefighting Signs



Fire Hose | Ladder | Fire extinguisher | Fire Hydrant | Emergency Fire Telephone



Supplementary ‘This way’ signs for firefighting equipment

Additional Firefighting Signs



Fire Alarm Button | Fire Closet Number | Fire Extinguisher Number | Fire Hydrant Number

Basic Rules

- Safety Signs

Standards on the Use of Signs with Supplementary Information

As per the Health and Safety Signs Regulation No.28762 dated 11 September 2013, the standards on the use of signs with supplementary information are defined below.


Where the warning signs are already comprehensible, supplementary information text is not required.

Supplementary safety information, as text and/or in the form of a graphical symbol may be used to describe, supplement or clarify the meaning of a safety sign.


The supplementary safety information shall be placed in a separate supplementary sign or included as part of a combination sign or a multiple sign.

Warning Signs have been prepared according to the laws and regulations of the Republic of Türkiye. These signs need to be revised and adapted to the laws and regulations of the specific country where they will be used.


Single Use

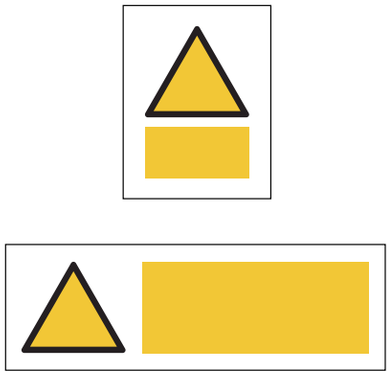

Positions of Use

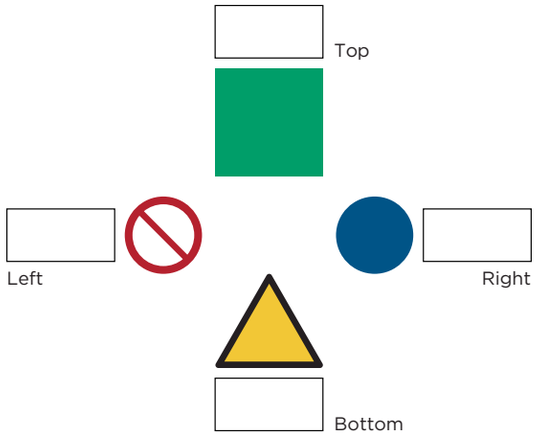

Group Use

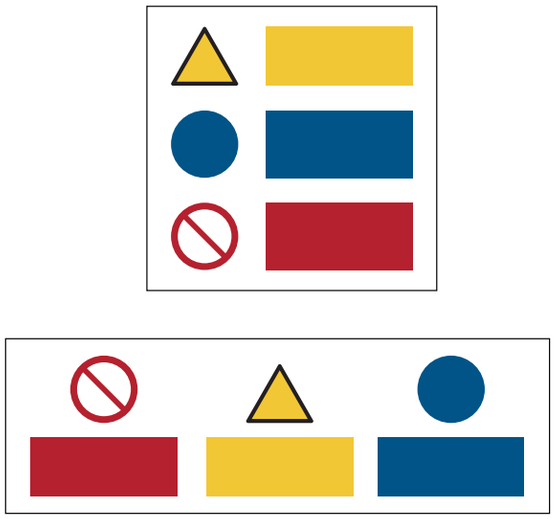

Basic Rules


- Safety Signs

Examples of Supplementary Information Usage


Examples related to the usage of compulsory signs with supplementary information are given below.

* Preferential usage structure.

Single Use

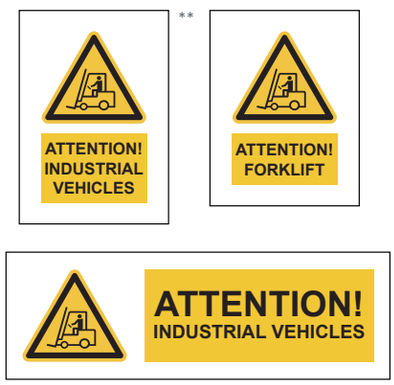

Positions of Use

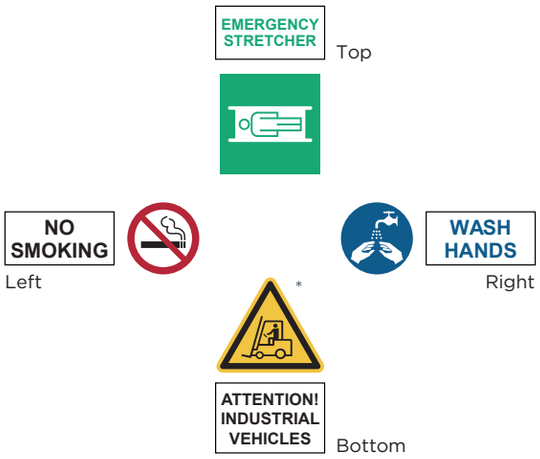

Group Use



Basic Rules

- Safety Signs

Traffic Signs

Traffic signs can be used to regulate the traffic and eliminate possible risks in the plant area in addition to lanes.

The maximum speed in the plant area is 20 km/h. Additions can be made to these signs according to the standards if necessary.

The signs that are used within the factory site can be used in the following three dimensions as needed:

Small : 40 cm
Medium : 60 cm
Large : 90 cm

Traffic Signs have been prepared according to the laws and regulations of the Republic of Türkiye. These signs need to be revised and adapted to the laws and regulations of the specific country where they will be used.

Traffic Signs



Basic Rules

- Safety Signs

Additional Informative Signs

Some examples of warning, prohibitive and guiding signs specific to the organization to be used in the plant area are given below.

If necessary, other signs specific to the organization can be employed based on these examples.

Other Signs









Basic Rules
- Additional Informative Signs

This group includes general information that is important for the user.


Shape: Square

Color: TCCC Platinum

Categorizing Icons According to Target Group

An icon's category also depends on the specific message to the respective target group.

Information

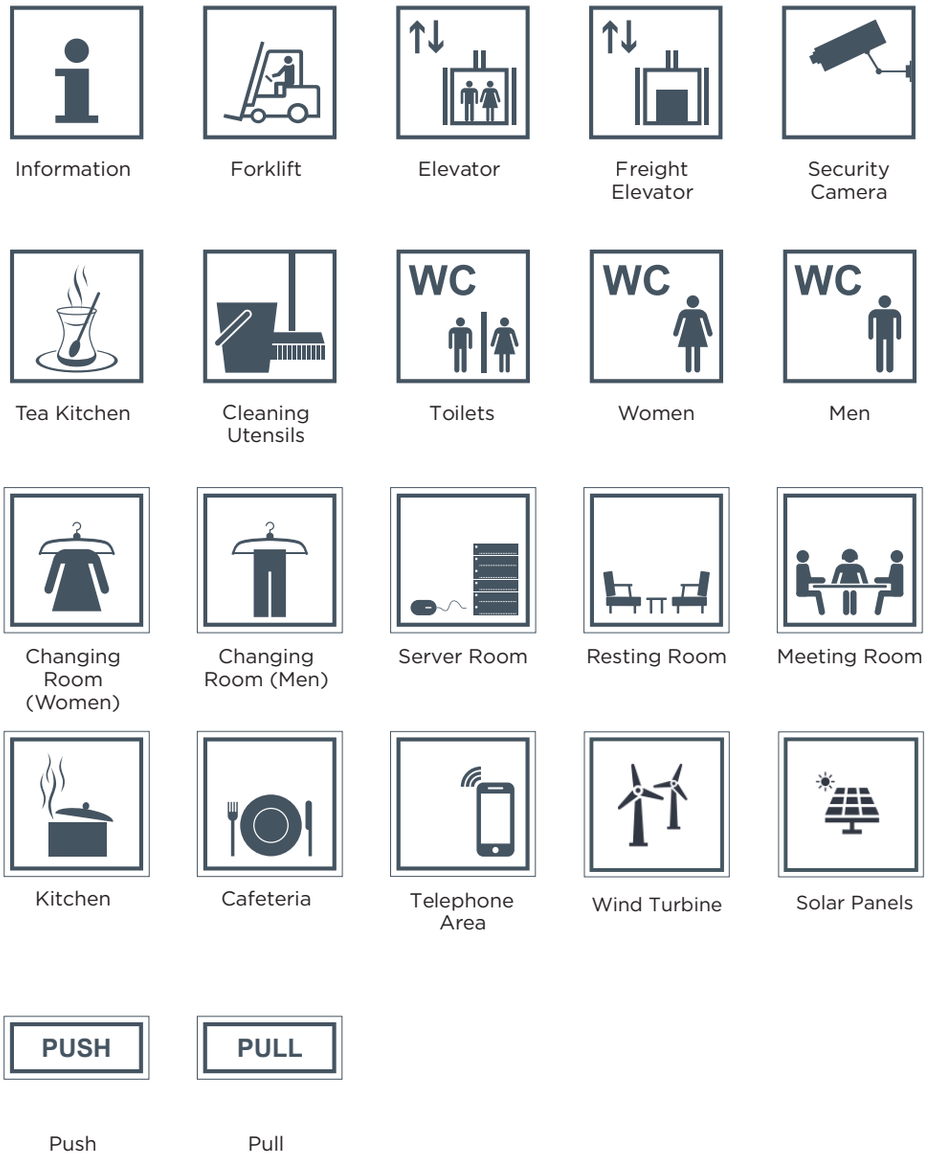

Information | Forklift | Elevator | Freight Elevator | Security Camera

Tea Kitchen | Cleaning Utensils | Toilets | Women | Men

Changing Room (Women) | Changing Room (Men) | Server Room | Resting Room | Meeting Room

Kitchen | Cafeteria | Telephone Area | Wind Turbine | Solar Panels

Push | Pull

Basic Rules
- CCI Life Saving Rules Icons

Each icon below represents one of CCI's Life Saving Rules and is used in the communication of the rules.

CCI Health & Safety Sign

Life Saving Rules

Zero is possible

CCI, Life Saving Rules Signs



Think Smart Before You Start



See, Say, Do Something



Right Skills for the Task



Contractor and Visitor Safety



Work Permit (Authorization)



Work at Height



Safe Equipment



Safe Work Energized Systems



Confined Spaces



Hot Work



Hazardous Chemicals



Safe Zones



Forklifts / Lift Trucks



Safe Driving

Basic Rules
- CCI Green Rules Icons

Each icon below represents one of CCI's Hand in Hand Environment Management Program Green Rules and is used in the communication of the rules.

ATTENTION

Use the larger sign wherever possible. Optimal positioning is at eye level.

CCI | HAND IN HAND ENVIRONMENT



Basic Rules
- Types of Materials for Signs

Please select appropriate one

Printing on Alucobond:

Convenient for all indoor and outdoor use. It is resistant to water and damp. As the material is 4-6 mm thick, it may stand upright or be suspended.

Printing on Plexiglas:

Convenient for all indoor and outdoor use. Mounting on a wall is recommended in order to avoid scratches on the shiny print.

Printing on Folio Sticker:

Convenient for all indoor and outdoor use. It is self-adhesive and may be fi xed on a wall or on the flat surfaces of a machine.

Printing on PVC:

Convenient for all indoor and outdoor use. May be fi xed on a wall or on the fl at surfaces of a machine using a double-sided adhesive band. More resistant and thick than folio sticker printing.

FOREX Panel:

Convenient only for indoor use. Not resistant to water and damp FOREX Panels are eligible office use. May be fixed on a wall using a double-sided adhesive band.

Vinyl Poster:

Is in large dimensions. Convenient for indoor and outdoor use. May be used by suspending on a wall.

Folio Coating on Plexiglas:

Convenient for all indoor and outdoor use. Mounting it on a wall is recommended in order to make it more resistant.

Occupational Safety and Quality

Critical Control Point (CCP) Identification

All critical control points are conspicuously marked to ensure the highest degree of visibility.

ATTENTION

Use the larger sign wherever possible. Optimal positioning is at eye level.

Constant Elements

The red and white attention identifier as well as the terms “CCP” and “Critical Control Point” are constant elements on every such sign.

Variable Elements

The respective machine section is variable and can be overwritten.



8 Modules x 18 Modules



Sizes

S	16x36 cm.
M	24x54 cm.
L	32x72 cm.
XL 4	8x108 cm.

Occupational Safety and Quality Notices
- Icons and Collective Signs

Several occupational safety and hygiene notices may be displayed together in the form of icons on collective signs. To enhance the flexibility of this solution carrier signs have been developed onto which the icons can be pasted. Carrier signs for icons always have a red and white attention identifier. They are available for different numbers of icons.

Formats


Stickers and carrier signs are available in the formats S, M, L, and XL. The formats S, M and L are for applications at eye level. Icons on XL signs are rhe same size as traffic signs. They are usually placed a lot higher and inform drivers about regulations to observe.

The formats for this type sign are determined by the diameter of the icons. These may be scaled to the following sizes:

Format Icon diameter
S - 8 cm
M - 16 cm
L - 32 cm
XL - 45 cm

The modules of the appropriate format category are used. This means that the attention identifier and corner radius of the carrier signs correspond to the general specifications of the format categories M, L, and XL (See chapter Basics, section Formats and Grids).


Icon Sticker Size




Carrier Signs




6 Stickers

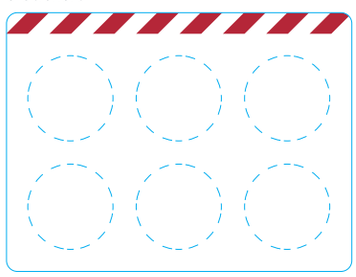

9 Stickers

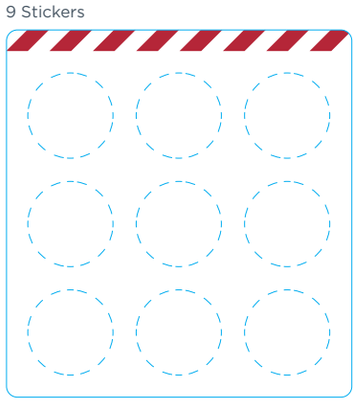

Modules

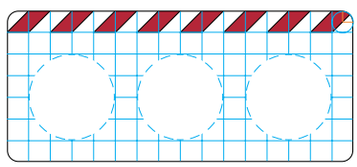

Occupational Safety and Quality Notices
- Warning Materials

Warning or hazardous material signs are used to identify hazardous materials (health hazard or risk of serious injury or death) or situations. Signs on which these icons are displayed are always marked with the yellow and black safety identifier.


Warning Signs

Warning signs consists of a yellow triangle with a black symbol. They warn of an imminent danger and can beused on doors behind which are containers with hazardous contents.


Collective Signs for Safety Icons

Several safety icons such as warning symbols or hazardous material symbols are displayed together on white collective signs with a black and yellow safety identifier. A number of collective signs are available for this purpose in sizes S, M, and L.


Icon Sticker Size

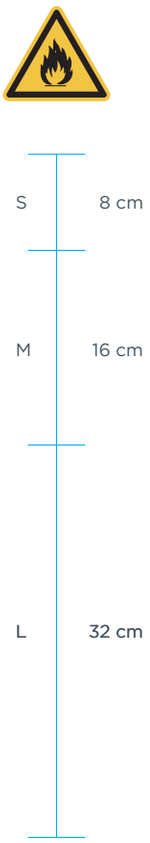

Collective Signs

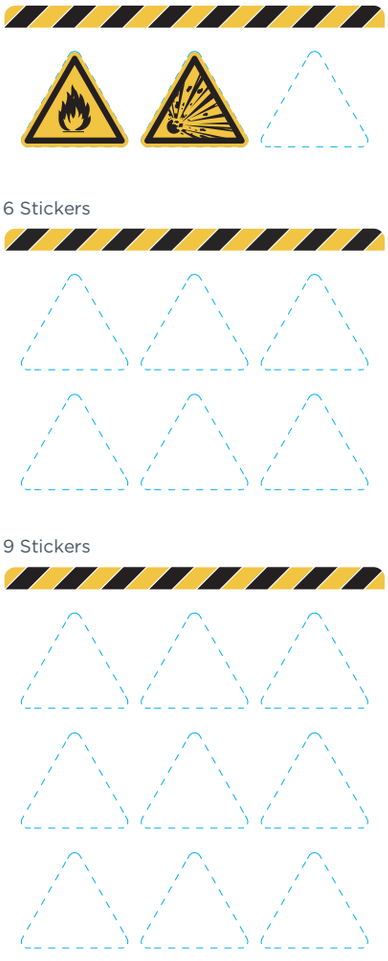

Modules

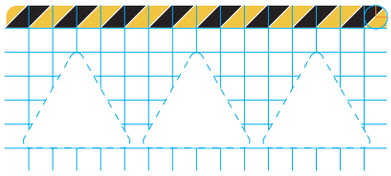

Occupational Safety and Quality Notices
- Text Notices

In addition to beingcrepresented as icons, work instructions can alsocbe formulated as texts. Depending on the spacecavailable, they can be implemented as a sign orcsticker.

Occupational Safety and Hygiene Notices

Occupational safety and hygiene notices are printed in mixed upper and lower case letters. You may choose between upper and lower case letters only in the case of very short texts of two words or less.

Safety and Quality Notices

Occupational Safety Notices

It applies to the use of a single text phrase, regardless of it being written on a single line or more lines.
This standard is not applicable to cases where there are other texts or visuals under or below the text phrase.

Align Center



Align Center



It applies to the use of multiple phrases that support or relate to each other in multiple lines.
In case there are other texts or visuals under or below the text phrase, all texts should be aligned to the left.

Align Left



Align Left



Occupational Safety and Quality Notices
- Collective Signs

Warning signs are collectively used in two ways. It is recommended to adhere to these ways unless there's an urgency to do otherwise. In such applications, the width of all signboards and informative messages used on top of each other must be the same. In this application, all signboards have to be aligned left.

Joint Usage Of Signs And Explanatory Information


If the board with prohibitory and mandatory signs needs to be used with informative text, the text should always be placed above the signs.

This rule is also valid for warning signs. The boards should be placed leaving a space of 1 module between them.

Joint Use of Different Signs

In cases where only the useof signs is sufficient, prohibitory and mandatory sign boards and warning sign boards (if any) should be placed one below the other leaving a space of 1 module between them.

Text and Signs

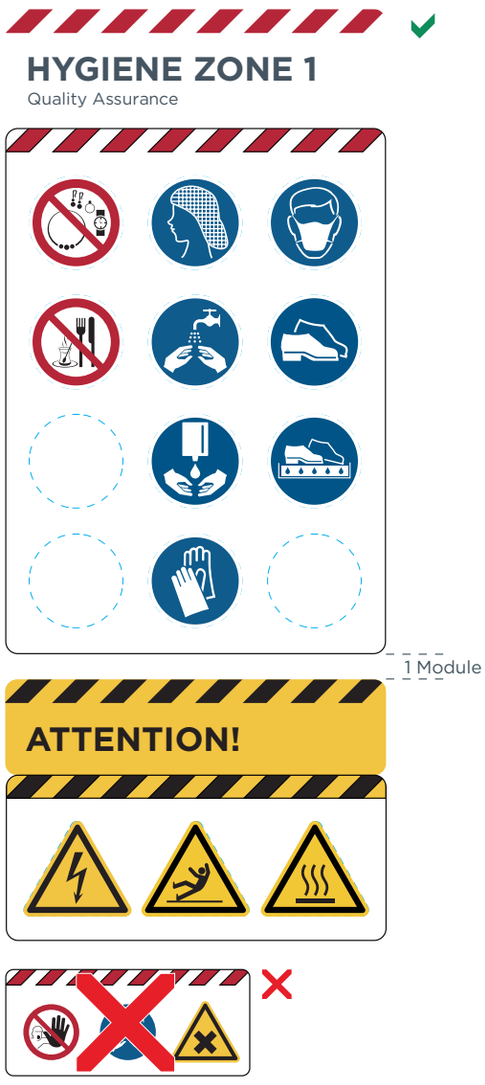

Signs



Statutory Safety Signs


Commercially available standard signs are used for statutory applications such as signs identifying fire doors or emergency exists.

Rectangular or square shape. White pictogram on a green background.

Lighting is compulsory for the signs on emergency exit doors.

In the case of a power outage or the need to cut power, lighted signs must be kept on using backup energy sources. Lighted signs should be reusable.

Icons

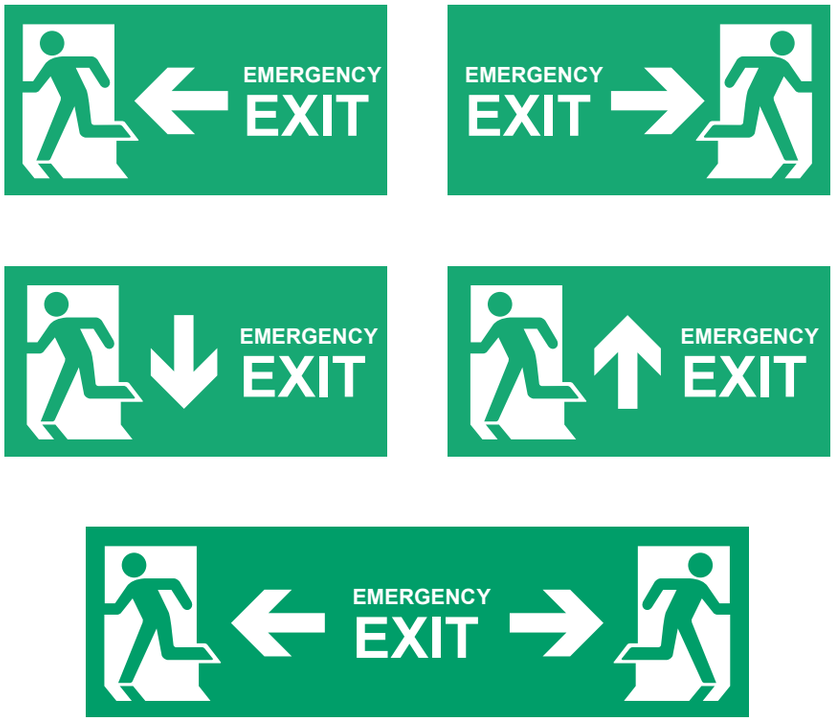

Hygiene Zones

Plants are divided into hygiene zones for occupational safety and health reasons. Zones 1, 2, and 3 are identifi ed. Hygiene Zone 1 has the strictest requirements. Hygiene zones 2 and 3 follow. Please refer to Annex 9.1 on p.99 to see a full list of the hygiene zones cleaning color codes and the relevant warning signs. The zones are idetified by two signs places one above the other.

Sign: Hygiene Zone Identifier

The upper sign specifi es the type of hygiene zone. The name of the department is also written underneath.

Sign: Occupational Safety and Hygiene Notices

The lower sign contains all the occupational safety, hygiene, and prohibition symbols that apply to the respective zone. It is a carrier sign with space for 12 stickers that can be applied as required.

Icon Sticker



Icon Sticker



Hygiene Zones

Positioning of Signs

The distance between the signs should be same as the height of the attention identifier.

Requirements for Occupational Safety and Quality Notices

The three hygiene zones different minimum requirements with respect to occupational safety and quality.

This minimum of notices must be displayed on each sign for the respective zone. Additional icons may be added as required to apply the regulations to the specific situation.

Arrangement on the Carrier Sign

The stickers are arranged on the collective sign in groups, always starting at the upper left. The rows of stickers are always left aligned. Requirements and prohibitions each form a unit and are positioned together so that all requirements or prohibitions are applied one beneath the other. Safety warnings are placed as shown in the illustration.

Requirements



Hygiene Area
- Hand Hygiene

A Hand Hygiene Notices

The hand hygiene sign with detailed instructions on cleaning hands is displayed at all washing facilities.

Hand Hygiene Notices



Markings and Identifiers
- Safety

Areas and behavior rules are identified by markings in specific colors and shapes. Walkways, parking spaces, and restricted zones can be clearly and directly identified in this manner to ensure safety and quality.

Roadway and Walkway

Markings on the floor or ground identify streets on the grounds and mark pedestrian walkways.

Motor Vehicles

Ground Markings
Color: RAL 1023 traffic yellow

Roadway

Lines, 12 cm wide

Stop Lines

Unbroken, line 25-50 cm wide

Restricted Zones

Outer border: Lines, 12 cm wide
Crosshatch: Lines 25 or 50 cm wide depending on total area

Parking Spaces

Dimension: 5 m long, minimum 2.30 m wide (from middle of line to middle of line)
Line: 12 cm wide


Directional Arrows


Length: 1 - 2 m
Line: 30 cm wide


Orientation Signs


Roadway Text: cap line 30-50 cm

Safety


Roadway


Roadway - Overtaking Prohibited


Roadway - Broken Line


Stop Line


Restricted Zone


Parking Spaces


Directional Arrows



Roadway Text

Markings and Identifiers
- Safety

Pedestrians
Ground/floor marking
Color: RAL 1023 traffic yellow

Walkways
Two parallel lines, 12 cm wide It is advisable to coat the walkway in gray to prevent slipping and for optical reasons. For indoor walkways, the minimum width must be 80 cm.

Walkway Restricted on One Side
One line 12 cm wide. If the walkway leads along a wall, a fence or guardrail, this will provide the second optical limit, allowing one line to be sufficient.

Walkways over Iron Parts
Where iron parts are on the ground/floor, e.g. a gully, the line does not continue over the metal.

Cross Walks
Where pedestrian walkways cross vehicle roads, crosswalks should be prepared with the below measures and standards. Crosswalk line widths may vary between 25 and 50 cm depending on the location of the crosswalk. The space between the lines must be standard. The minimum length of crosswalk lines must be 150 cm.

Pedestrian icons
Pedestrian icons must be used in all the walkways. Minimum height of pedestrian icon must be 80 cm.


Paving Stones
Continuous sidewalk edges should be painted in yellow and black with lines of any equal length between 70 and 100 cm. In case of sidewalk edges with paving stones, the stones should be painted in the order of 2 yellow ones followed by 2 black ones.

Safety


Walkway



Walkway Restricted on One Side


Walkway Over Iron Parts



Cross Walk


Pedestrian Icon


Paving Stones

Markings and Identifiers
- Safety

Hazardous Zones

All areas where there is an injury or accident hazard must be identifi ed by black and yellow crosshatch. Such hazards include raised thresholds, corners, and columns, steps, the first and last treads of a stairway, and guardrails.

Marking

Color: RAL 1023 Traffic Yellow and RAL 9005 Jet Black Oblique crosshatch: 45°angle black and yellow lines are always of equal width. The width of the lines depends on the object to be identifi ed. Markings on the floor or ground identify streets on the grounds and mark pedestrian walkways.

Raised Thresholds

Line thickness: 15 cm

Posts

Identified by two horizontal black lines on a yellow post. Line thickness: 5 cm Distance from top: 7 cm Distance between the lines: 5 cm


Columns, Steps, and Stairway Treads

Columns are identifi ed directly or on their ramming protection. In case of steps or treads, the first and last tread must be marked. Line thickness: 10 cm

Restricted Zones


Restricted zones are identified by a red and white crosshatch pattern on the wall or a cordon.
Color: RAL 3001 Signal Red and RAL 9003 Signal White Oblique crosshatch: 45°angle

Hazardous Zones



Identification of Hazardous Zones








Raised Thresholds


Posts


Columns, steps, and stairway treads



Restricted Zones


Identification of Restricted Zones


Movable posts with cordon tape

Markings and Identifiers
- Quality

These markings identify and label specific storage spaces and restricted zones to ensure good quality is maintained

Furnishings and Equipment in Production and Logistics

The positioning of mobile furnishing and equipment such as raw material containers, machines, or devices is marked as follows:


Ground/floor marking
Color: RAL 1023 Traffic Yellow

Storage Space: Square, line width 12 cm


Lettering: Yellow text

Restricted zone: Cross lines, line width 12 cm

Quality



Storage Space



Restricted Zone


Color Coding of Cleaning Utensils


To ensure a high standard of quality, certain zones and areas have special cleaning utensils.


These color coded to identify them clearly and conspicuously..

Red brooms and dustpans are subject to the strictest cleanliness requirements (hygiene zone 1). They may only be used to clean fillers and specially marked areas. Blue brooms sweep in hygiene zone 2 (except for the vicinity of fi llers); green brooms are used in hygiene zone 3, and yellow ones for glasses.

The adjacent icons were developed to identify the various cleaning utensils. They explain the color coding and are positioned next to the respective brooms and dustpans.

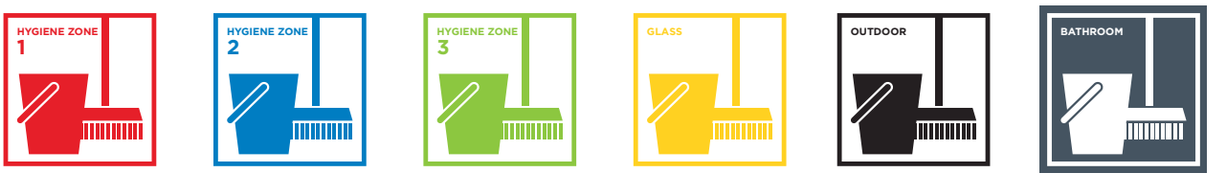

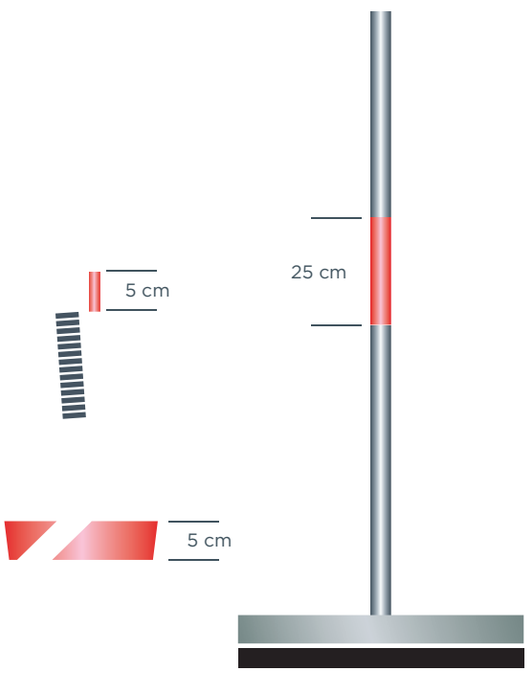

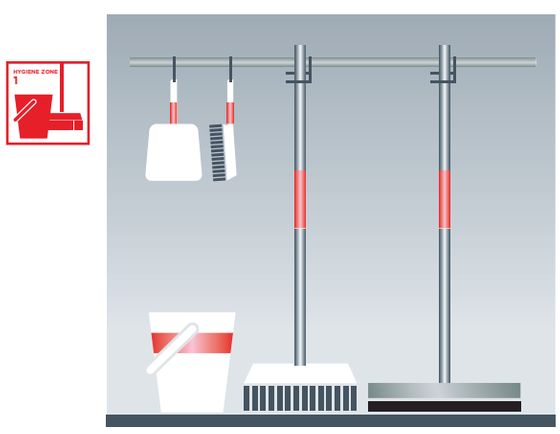

Identification of Residual Materials

All residual materials are separated in an environment-friendly manner and disposed of in the appropriate containers.

Color-Coding Residual Materials

The color-coding scheme shown here was developed in order to quickly identify the respective secondary raw materials. This colorcoding scheme has been consistently applied to all labeling and waste containers for residual material disposal. Other residual materials not included in this color code are identifi ed neutrally in yellow. There will be no more color codes.

Color-Coding Residual Materials

If the color of garbage cans and containers does not correspond to the color code of the residual garbage, a sign or sticker in the respective color is attached to the container. In the example shown, aorange sticker on a neutral background identifies it for the disposal of cardboard or paper.

Color-Coding Residual Materials

If the color of the container already corresponds to the residual material it is marked neutrally. A white sign with original color lettering may be selected (version 1). In the second version, only the lettering is set on the colored background. This effect can be achieved using stickers or signs on a transparent background or direct lettering on the surface, e.g. of the can.

RAL 1003
C5 M20 Y90 K0
PLASTIC
EWC KOD: 20 01 39

RAL 6017
C80 M20 Y100 K10
GLASS
EWC KOD: 20 01 02

RAL 9007
C0 M0 Y0 K60
METAL
EWC KOD: 20 01 40

RAL 5015
C100 M30 Y0 K10
PAPER
EWC KOD: 20 01 01

RAL 1001
C0 M20 Y50 K20
ORGANIC WASTE
EWC KOD: 20 01 08

RAL 8001
C40 M60 Y90 K10
WOOD
EWC KOD: 20 01 38

RAL 9005
C100 M100 Y100 K95
HOUSEHOLD WASTE
EWC KOD: 02 03 04

RAL 3000
C0 M100 Y100 K20
DANGEROUS WASTE







Identification of Residual Materials
- Colors and Standarts

Sizes


There are three dimensions available for marking various sizes of garbage cans and identifying their location. These sizes have been adapted to the standard terms.

Size Dimensions
1 - 15x15 cm
2 - 25x25 cm
3 - 45x45 cm

Mounting Signs

If there is no possibility to attach the sign to an object, e.g. a wall, please find a solution.

Example “A” illustrates how a sign can be attached to a pole and placed behind the waste container.

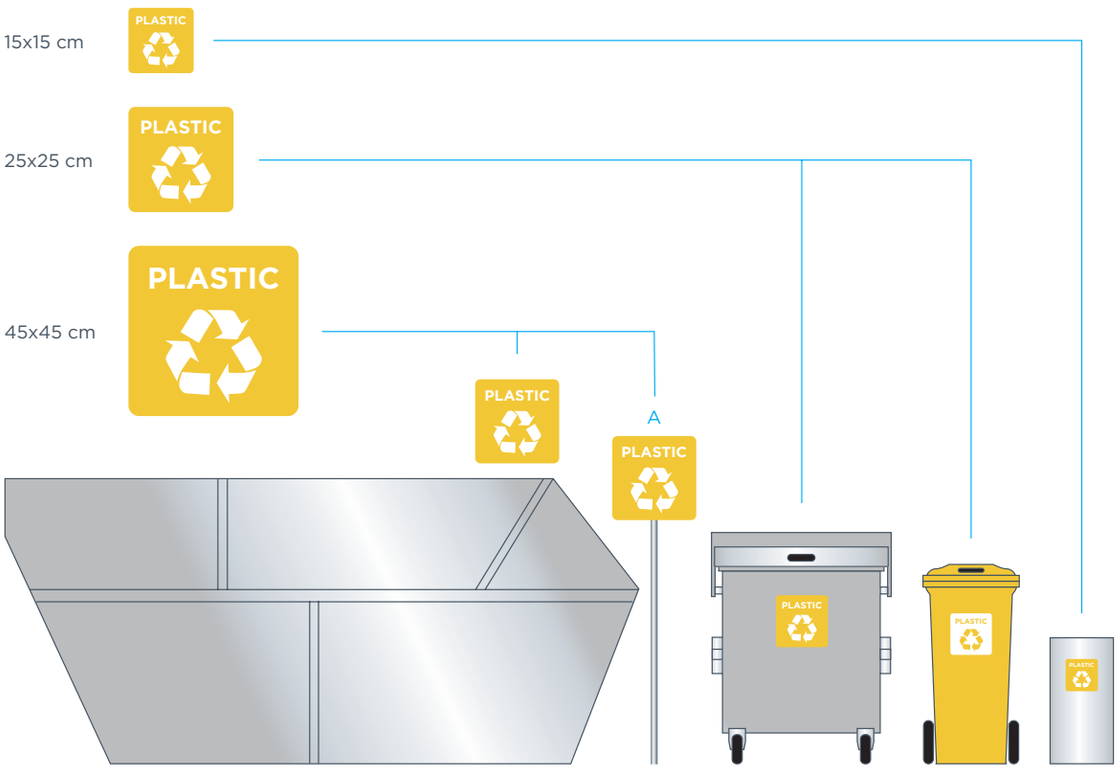



Colors

Identification

Identification of Buildings
- Entrances into the Main Departments

Sizes

Visual designs for plant building exterior pedestrian and vehicle entry doors for all departments are specified below. These designs should be applied in accordance with the conditions of the building.


Department Descriptions - Automatic Doors


In building entrances, different applications should be used depending on the characteristics and measures of the entrance.

Applications and their sizes are described below. The colors for each department are defined in section 2.0.

Height from the ground is important in determining the measurement system used for the placement of the department name in automatic door applications at store entrances. The height where the application is placed must be exactly 2m and the department name must be written from down to up.

If there is no restriction of available space, using the left side must always be preferred.

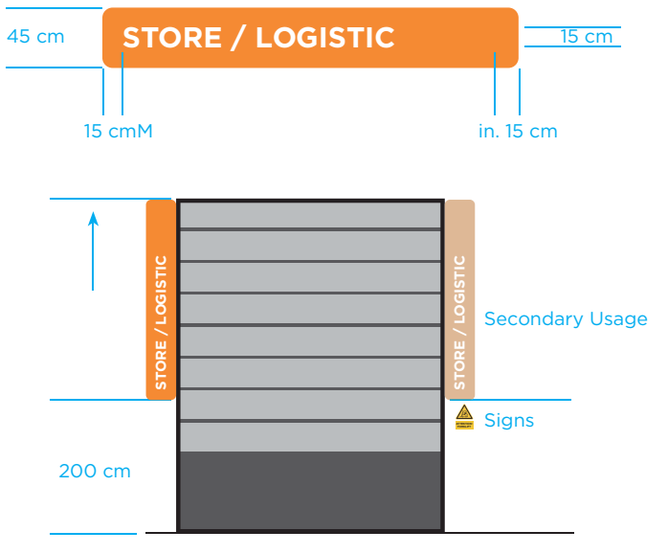

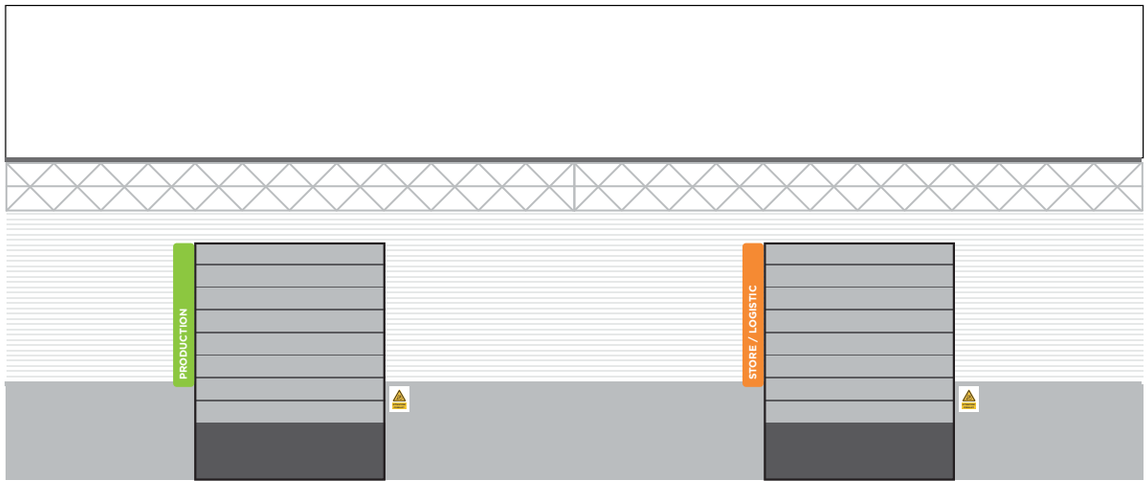

Identification of Buildings
- Entrances into the Main Departments

Department Descriptions - Small Doors


Applications and their sizes for small doors at building entrances are described below.


The color for each department is defined separately in section 2.0. (See 2.0)

If there is no restriction of available space, the application should be done on the side of the door handle.

Height from the ground is important indetermining the measurement system used for the placement of the department name in small door applications.

The placement of the application must always be on the same level with the top border of the door and the department name must be written from down to up.

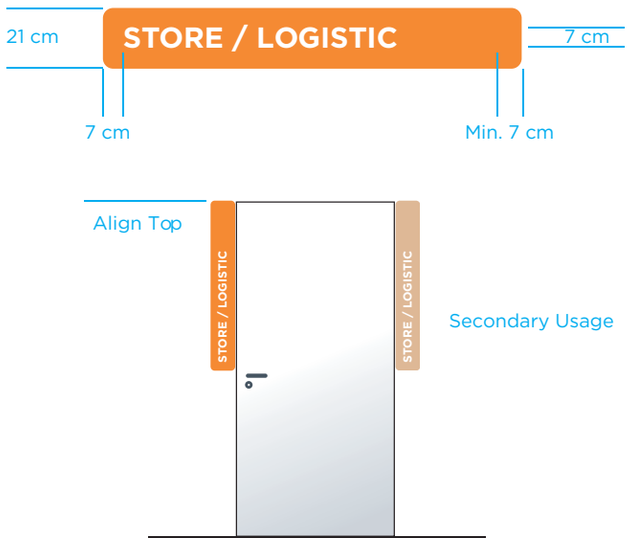

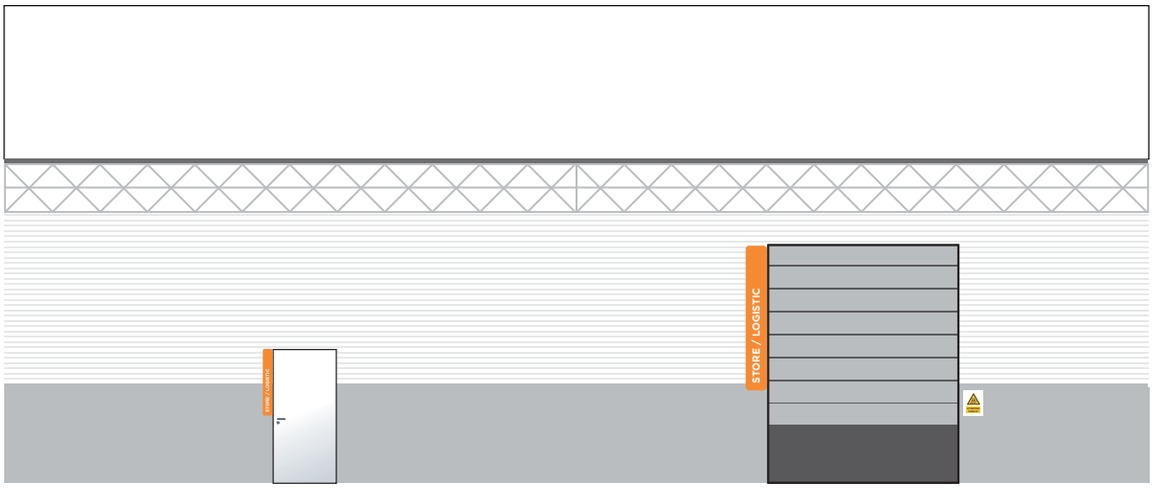

Identification of Buildings
- Gates-Passages between the Main Departments

Gates that act as passages between two main departments are identified by a corner. The corner has the color of the department behind the gate. This corner may be applied to the right or left edge of the gate depending on available space.

Corner

The color of the corner corresponds to the department: production is green, logistics in orange, etc.

The corner should be 2 m high from ground.

Stripe width: 1 m


Corner: Right angle


Text


The department name is identified within the corner.


Departmental Identifier

Left or right aligned text with a directional arrow above the gate.

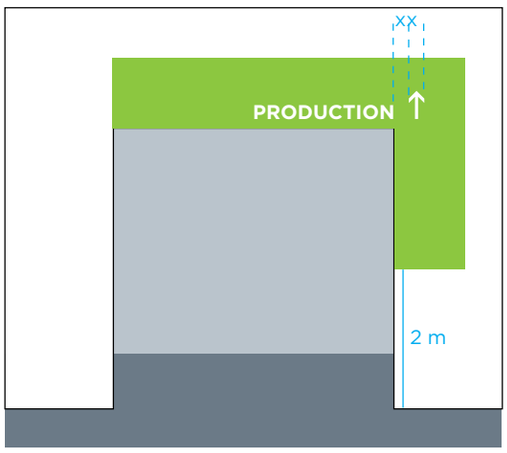

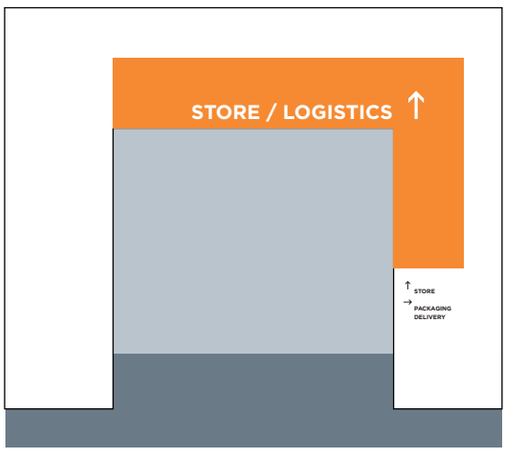

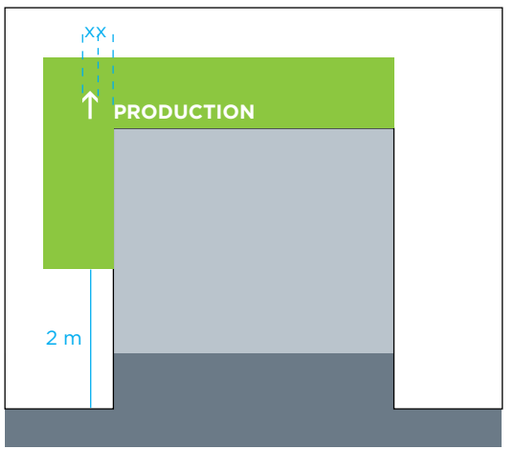

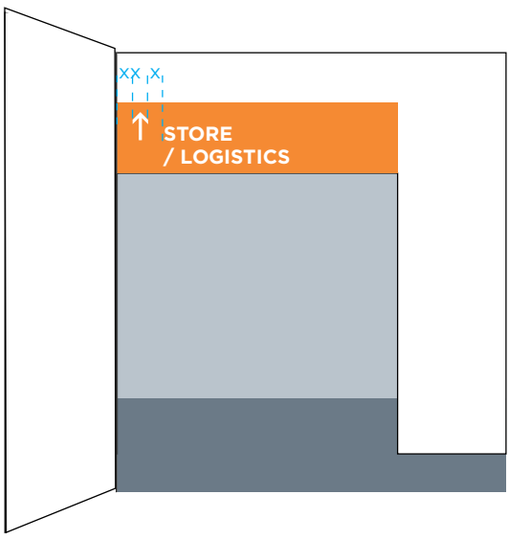

Identification of Buildings
- Doors - Entrances and Passages into the Main Departments

All the doors inside the plants opening to the main departments must be identified with bands on which the department name is written.

Inlay Doors

Inlay doors may be produced with various types of opaque material. The measures for these type of doors are given below. The application must be done on the hinge side along all its height.









Identification of Buildings
- Doors - Entrances and Passages into the Main Departments

Glass Doors

Glass doors may be produced with fully transparent or translucent material.

The measures for these type of doors are given below. The application must be done on the hinge side along all its height.

The material to be used in this application is one way glass film. The material should not block vision from the back side.









Identification of Buildings
- Doors - Entrances and Passages into the Main Departments

Doors with Glass


Doors with glass are inlay doors that have glass frames different sizes carved on their inlay. The material used may be fully transparent or translucent.


The measures for these type of doors are given below.


The application must be made on the hinge side along all the height of the glass.

The material to be used in this application is one way glass film.

The material should not block vision from the back side.

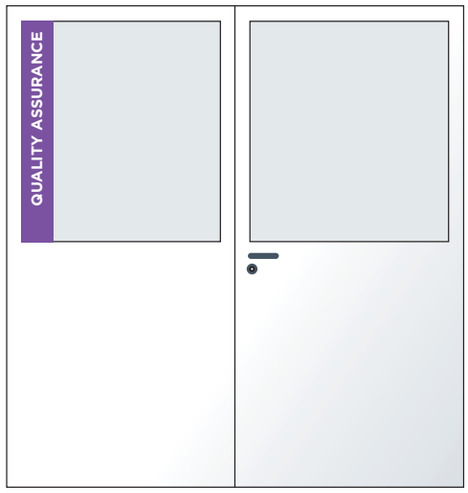

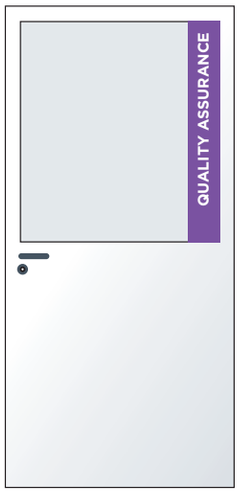

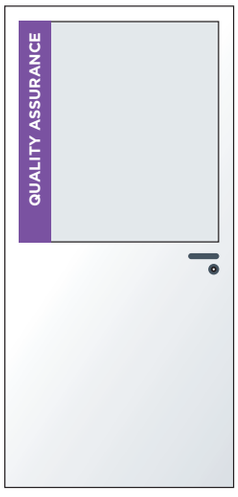


Identification of Buildings

- Multiple Department Applications

Glass Doors

If there are more than one department in the same area, the applications should be as given below.



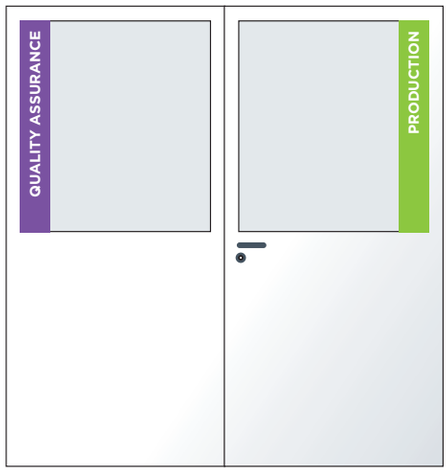





Identification of Halls and Rooms
- Meeting, Training and Seminar Room Doors

These rooms that are prepared for special purposes and group use should be separated from other doors by a different application.

Doors should be painted in white.

Color bottle image will be used on seperator doors and should always be used centered.

In the case of double doors, the second wing can be designed in six color as below.

Application

The application will be done according to the door types as follows.


1. Double-sided door application is shown below.
2. Framed, half-glazed and glazed doors, the glass should be covered with white background and the Color Bottle will be applied one way (outside).

One-Way Vision coating should be used for glazed doors. Recommended application shown below.

Color Recommendation

Color Bottle should always be used in its original colors or used as a white bottle image over one of the 6 colors on the color scale. TCCC Red background color should be preferred for white bottle image use on single color.

It is recommended that the application be made as foil printing on filled doors, and one way vision on glazed doors.

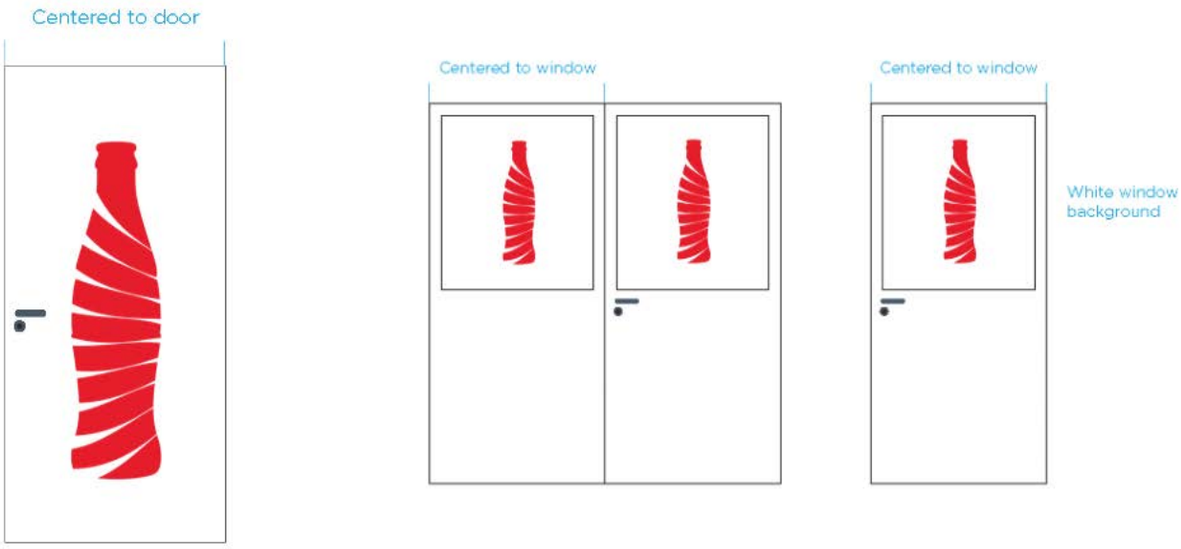

Sign and Texts
- Tanks

Tanks can be categorized as vertical and horizontal. Tank applications must be done horizontally regardless of its position.

In the case of double doors, if they are filled, there should be used the white color image on 6 colored background on the right door.

Tank Applications

There are two main rules for tank applications.
1. The name (content) of every tank must be written on it.
2. Relevant special warnings and prohibitory signs must be placed on the tank.

Examples of such applications are given below.


Application Size

From the 4 application sizes described below, the one that is closest to 1/3 of the tank's diameter should be used.

Tank Numbers

If there's more than one tank used for the same purpose, they should bd differentiated using numbers. The numbering system should facilitate the identifi cation of the tank.

The standards and examples for the numbering system are given below.

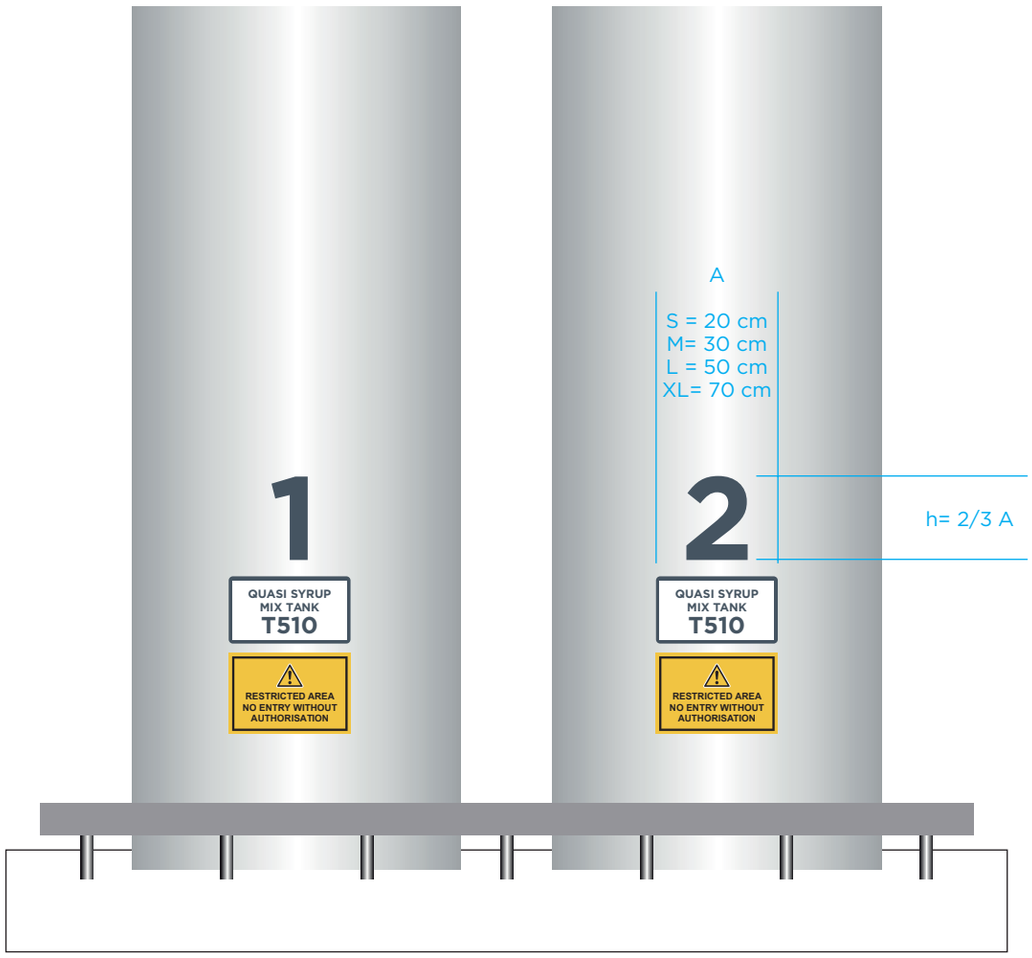

Sign and Texts

- Store Directions

Store direction signboards facilitate finding defined areas in the store and help with the correct execution of storage and delivery instructions.

In the case of double doors, if they are filled, there should be used the white color image on 6 colored background on the right door.

Directions
Store direction signboards are prepared using TCCC Platinum frame and texts colored with the corresponding department color.


There must be a signboard for every defined area in the store.

Signboards must be placed on corridors suspended from the ceiling in an easily visible position.

Measures

The suitable size should be chosen from the below alternatives according to the ceiling height and store size.

S = 70x100 cm
M = 80x120 cm
L = 100x150 cm

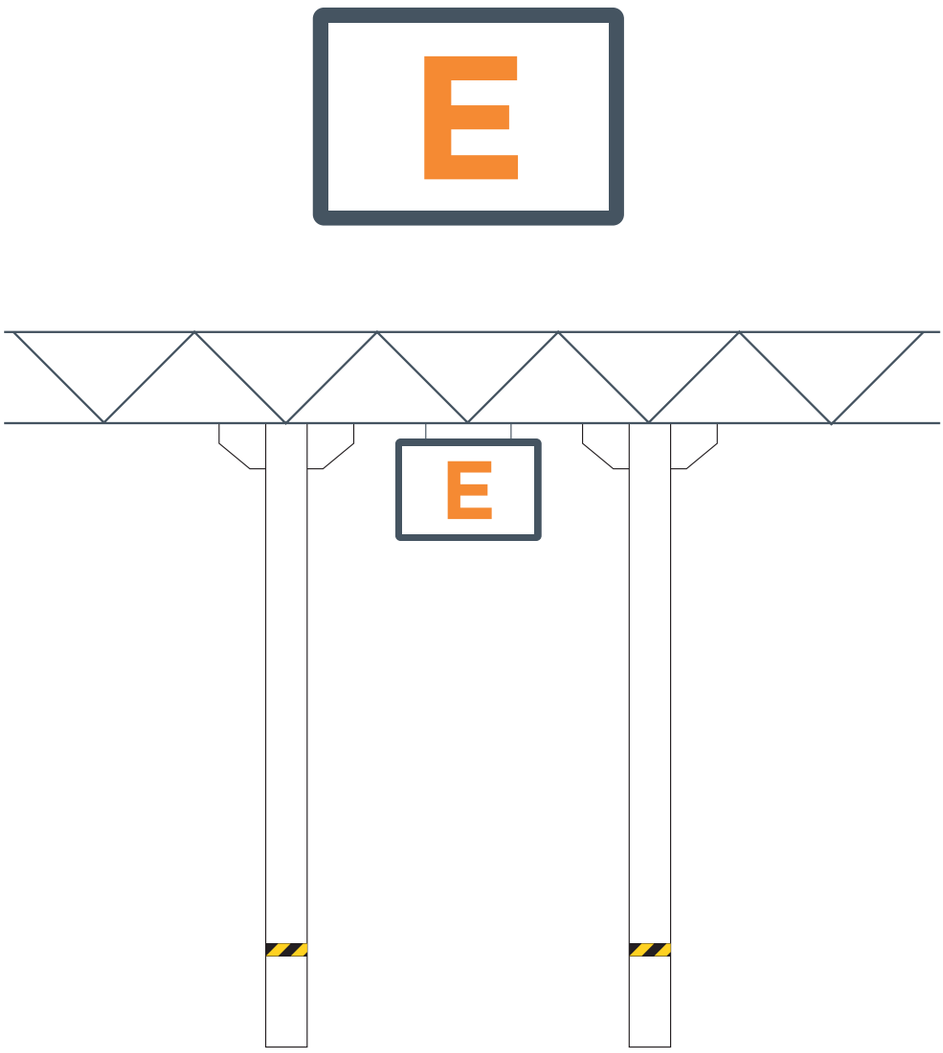

Sign and Texts
- Pipes

The contents and direction of flow are identified on all pipelines. The pipe contents are identifi ed according to the DIN color-coding system.

Contents and Direction of Flow


The signs are based on the color-coded identification of the pipe contents. An additional arrow to right of the lettering indicates the respective direction of flow.

Hazardous Material Sign

Where hazardous material symbols are required indicate to effect of the materials, they are always applied to the left of the basic identifier.

Positioning


The stickers should be applied in a readily visible position at corners and junctions. The stickers are positioned in full view in the middle of the pipe. If several pipes run parallel to each other or one above the other, then the labels are aligned at the arrows.
When labeling vertically arranged pipes, note that the labels will always be read from bottom to top.

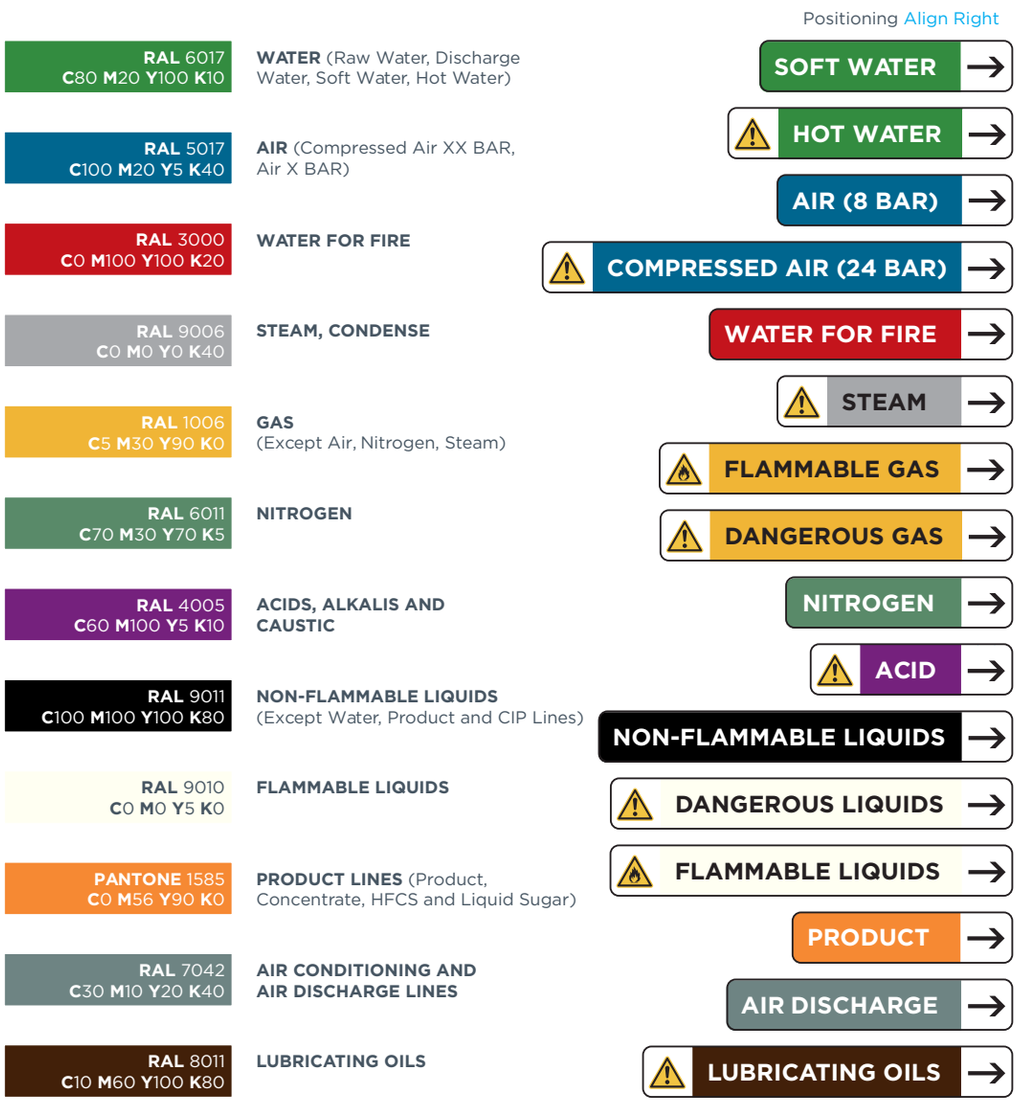

Sign and Texts
- Pipes

The stickers are available in three heights. The proper height is determined by the diameter of the pipe.

Pipe Sticker	Sticker Height
20-50 mm	2,1 cm
50-100 mm	4,5 cm
100-220 mm	9 cm

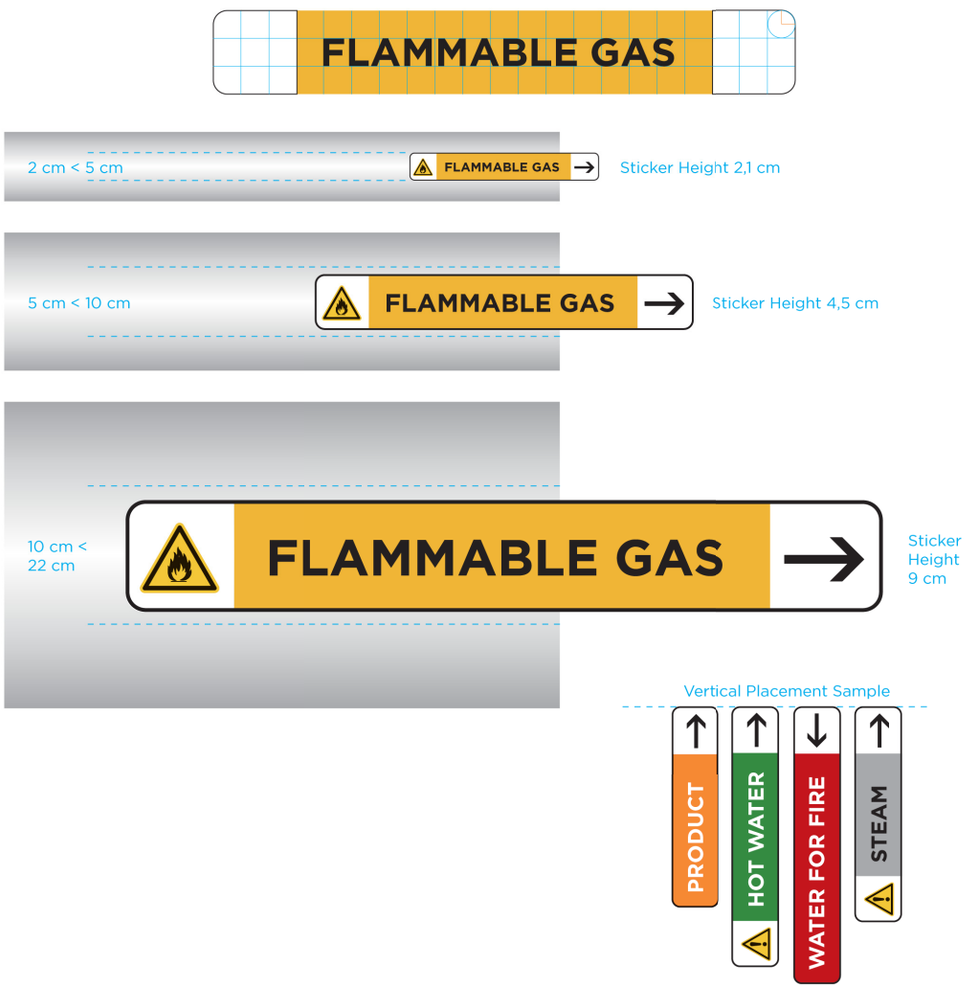

Signages


Freestanding Sign

The Coca-Cola logotype is used for freestanding sign applications in CCI plants.

All technical details about the sign must be presented to the plant management by the totem supplier.

Application

Freestanding sign can be used in 2 or 3 directions depending on the location of the plant and the position of the sign in the plant.

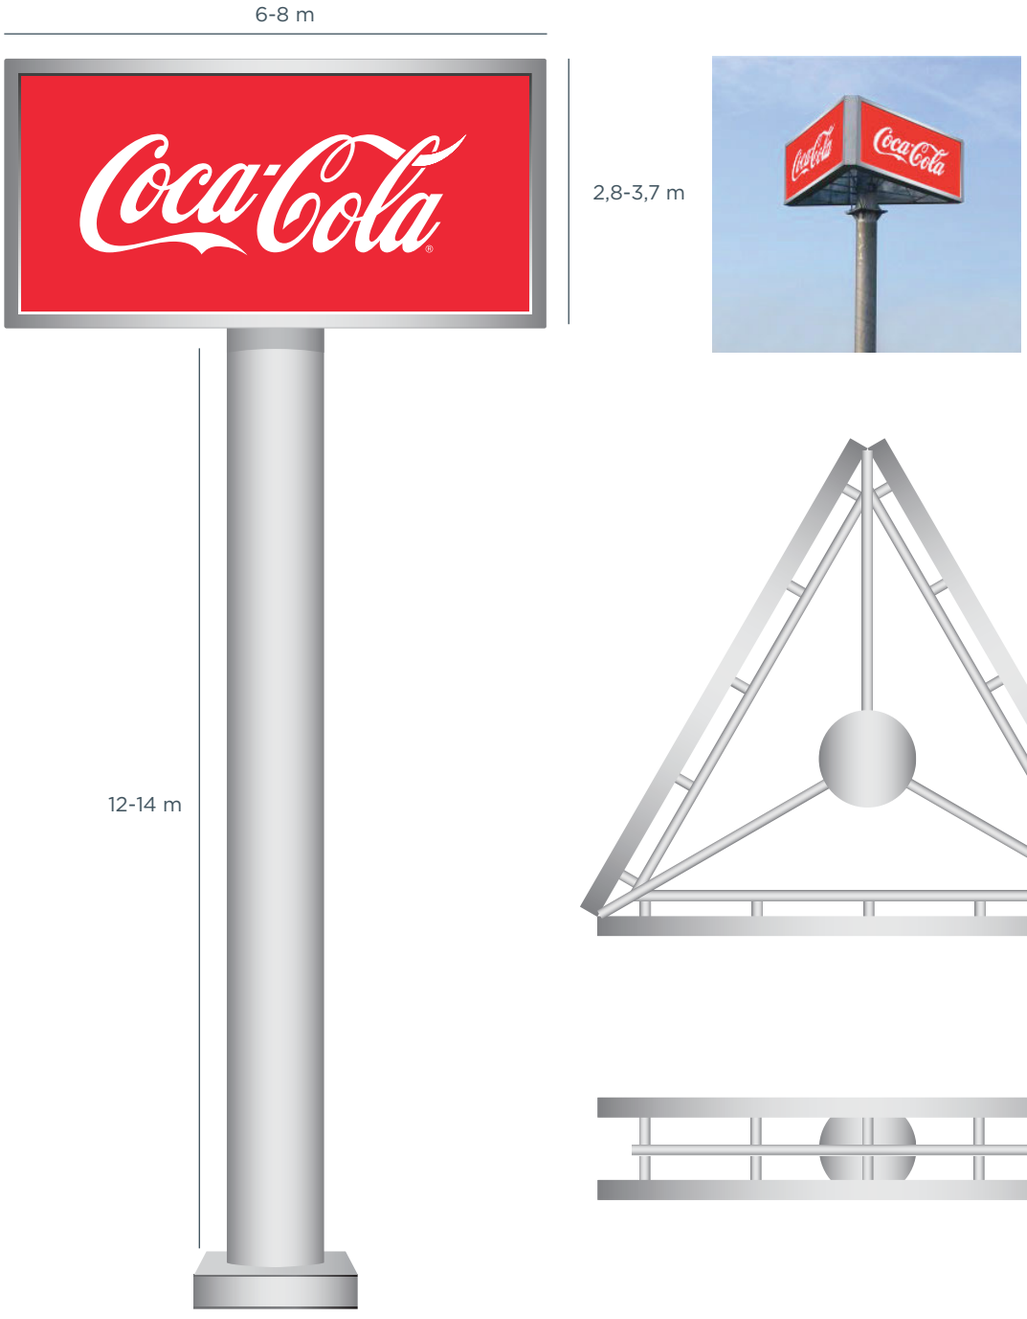

Facade Sign


The CCI logotype should be used on facade signs of CCI plants. Either facade sign or free-standing sign should be preferred. They cannot be used together.


Application

The standards for CCI logotype application in facade signs are defined below.

The minimum length of the logotype must be 6m. If the width of the facade does not allow this length, free-standing sign should be preferred.

The facade where the logotype will be applied should be chosen so as to allow visibility from afar and preferably from the main plant entrance.

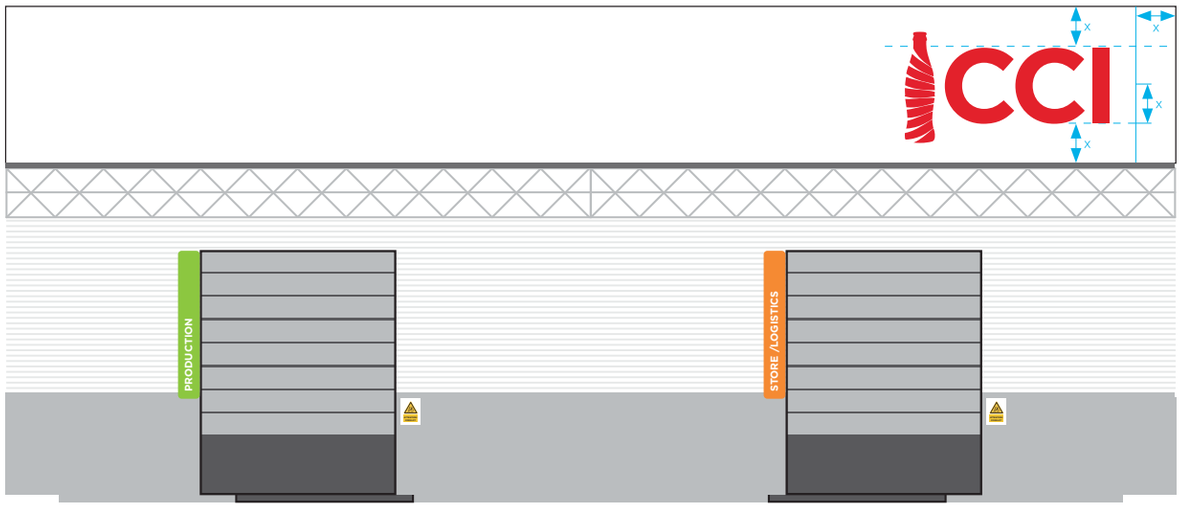

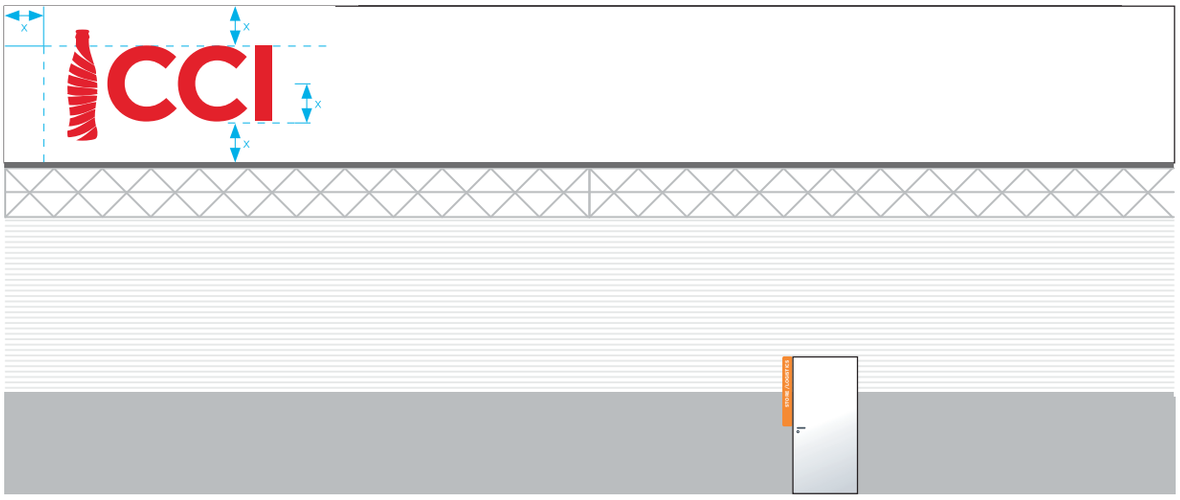

Flags
- Anadolu Group, CCI, Coca-Cola


For plant enterances.



CCI Flag

Only use 10 ribbon bottle CCI logo



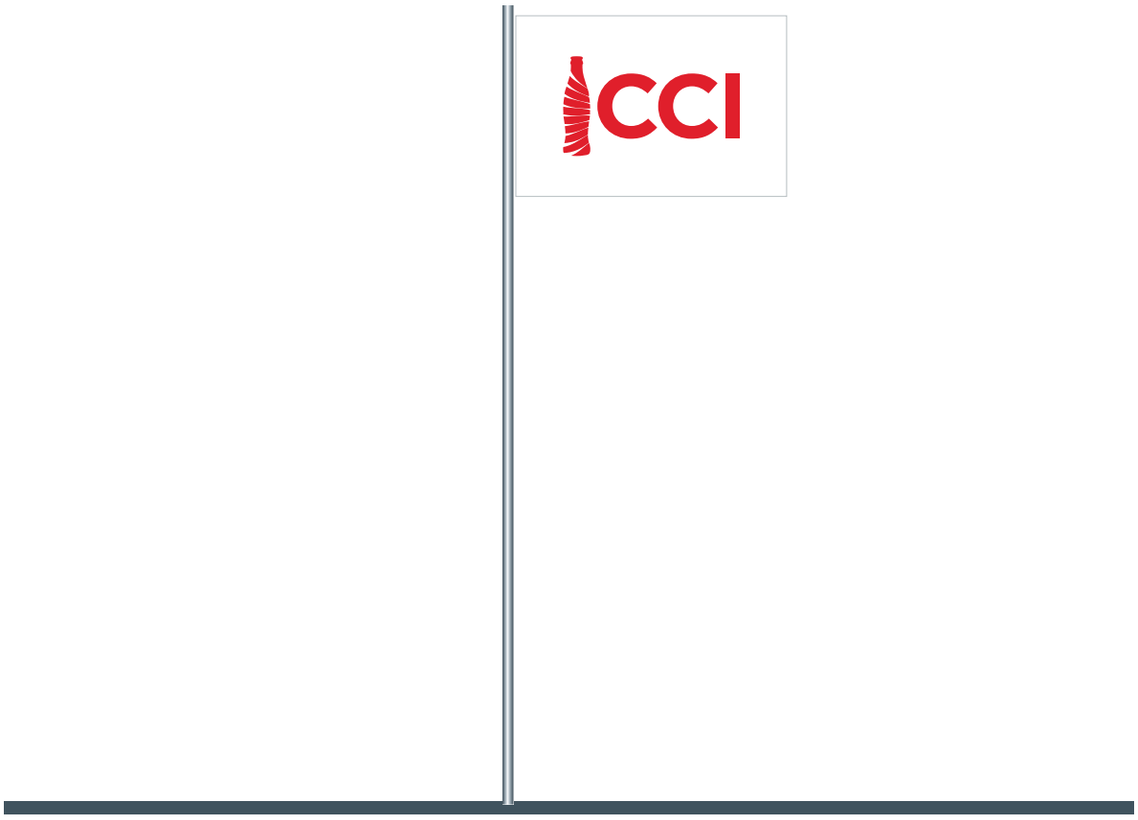

Main Entrances
- Plant Main Security Entrance / Signboard Applications

The CCI logo must be used at the plant's main security entrance. White CCI logo on TCCC Red background. Logotype usage must be done in accordance with corporate standards.

Signboard 1

The width of the signboard should be determined according to the characteristics of the entrance gate. If there's any mounting on the building, the signboard must be applied along the mounting. If there's no point of reference, the measures must be determined to allow a minimum signboard height of 80 cm.


Signboard 2

If the main security building has no suitable mounting or pediment, the signboard must be prepared to allow mounting and fixing at the front of the building. The minimum signboard height recommended for such applications is 120 cm.

Material

The signboard application must be done on Aluminum Composite Panel (Alucobond) using embossed Plexiglas for the logotype. The logotype should be lighted with led from inside. Where using Aluminum Composite Panel is not possible, vinyl print with lighting from behind can be used.


Signboard 1 example of application: 504x80 cm (Pediment size)

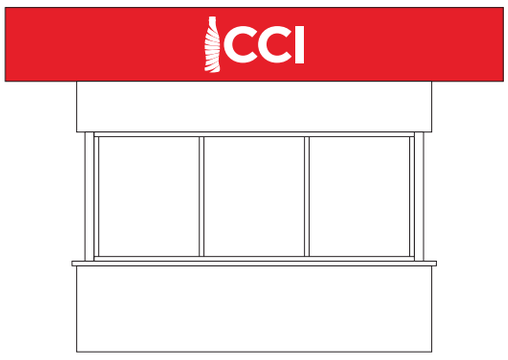


Signboard 2 example of application: 504x120 cm (Front mounted case size)



Signboard 1 example of application: 504x80 cm (Side View)

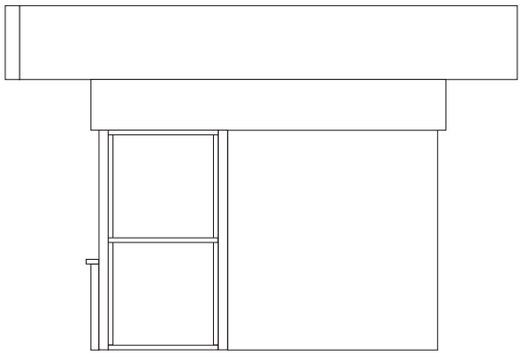

Signboard 2 example of application: 504x120 cm (Side View)

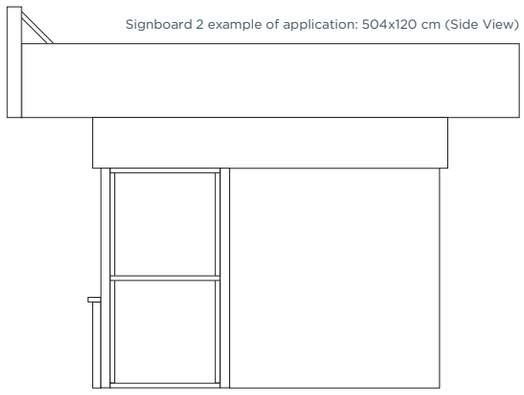


Main Entrances
- Welcome Sign

A welcome message should be written at the entrance of every plant. CCI logo should be preferred where the space is convenient. Otherwise, secondary usage at pedestrian entrance should be used.

Welcome message can be written in local language or in both local language and English, to be decided by the plant management.

Primary Usage

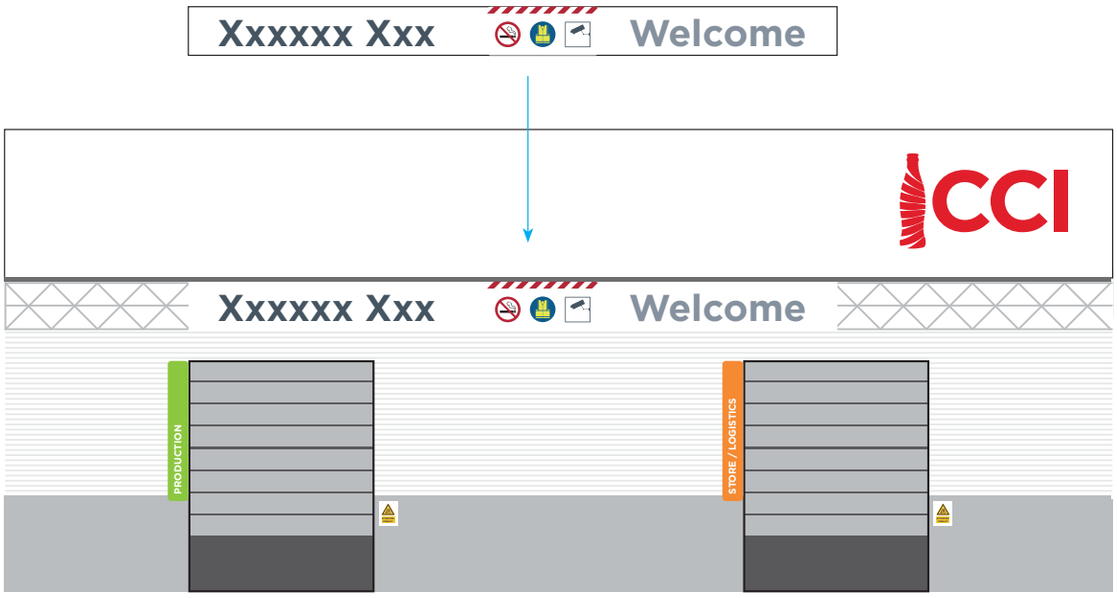

Secondary Usage




Main Entrances

- Plant Main Security Entrance / Sliding Gate Applications

All plant security entrance gates and fences must be painted black on top of the anti-rust layer.

All warning and informative signs and messages used on entry and exit gates must have reflectors.

Red reflector bands must be applied along the top part of all sliding gates.

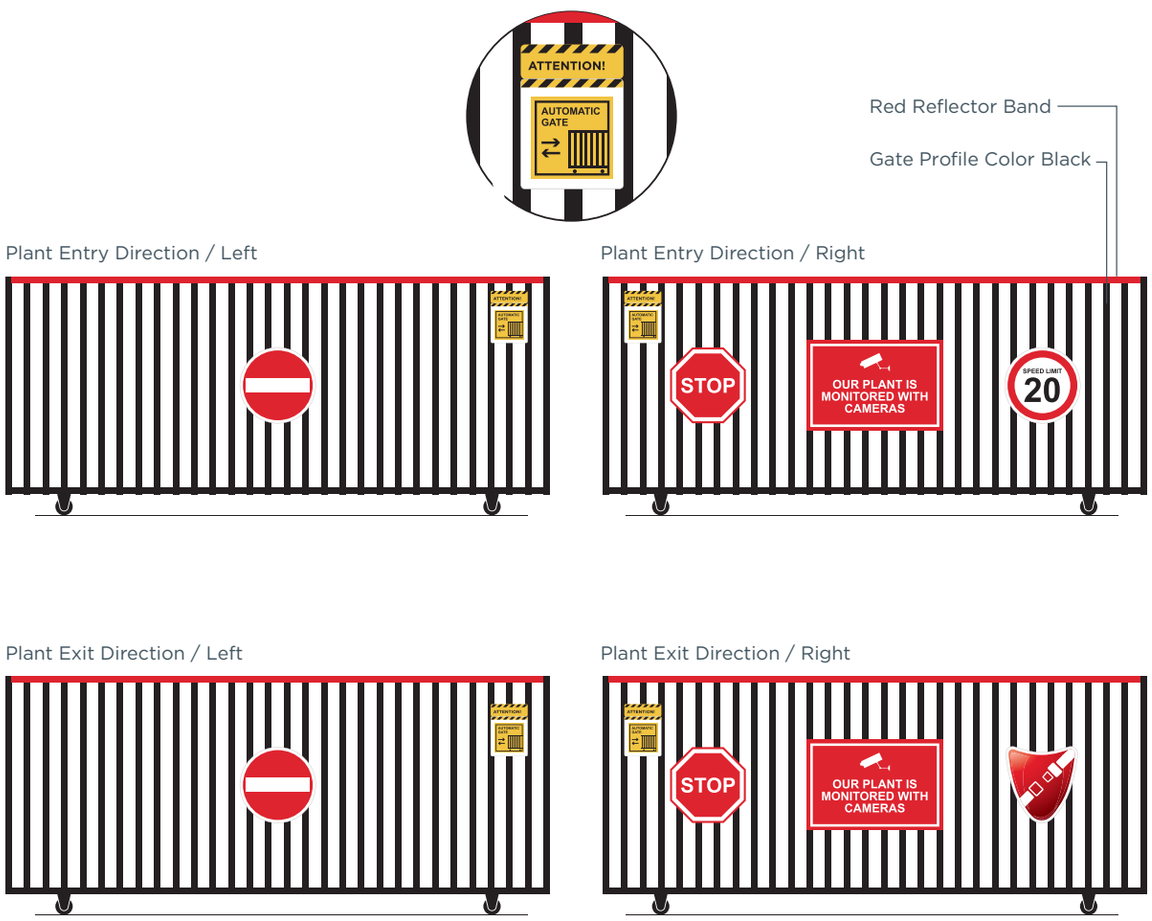

Main Entrances

- Plant Building Entrance / Signboard Applications

The CCI logotype is used on plant's main entrance door. The application of the logotype must be done according to corporate visual guidelines.

Signboard

White CCI logotype on red background.

The width of the signboard should be determined according to the characteristics of the entrance gate. If there's any mounting on the building, the signboard must be applied along the mounting.

The minimum signboard height should be 80 cm. If the pediment is smaller than 80 cm, the signboard should be mounted to the front. If there's no pediment the signboard must be prepared to be fixed on the wall.

Materials

The signboard application must be done on Aluminum Composite Panel (Alucobond) with carved logotype.

There will be no lighting. Where using Aluminum Composite Panel is not possible, same application can be done using FOREX carving or vinyl print.


Glass Band

In order to increase the visibility of glass doors and prevent accidents, 15 cm high glass bands made of mat sand frosted window film should be applied on plan building entry doors 150 cm above the ground. In the middle of every glass band the iconic contour bottle's negative space design with 10 cm height will be placed.

Example of application: 475x80 cm



Example of application: 475x80 cm (Example of a case mounted from front)

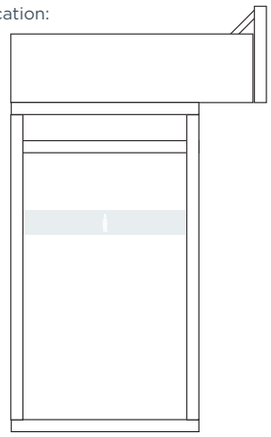


Pylon

The pylon marks the location of the CCI brand and is visible at a great distance. It bears the trademark and shows the name of location.

Other orientation information may also be included on the pylon.The design of the reception area should be open and welcoming, and it should reflect the spirit of the present times.

Pylon Dimensions

Height : 3 m
Width : 1 m

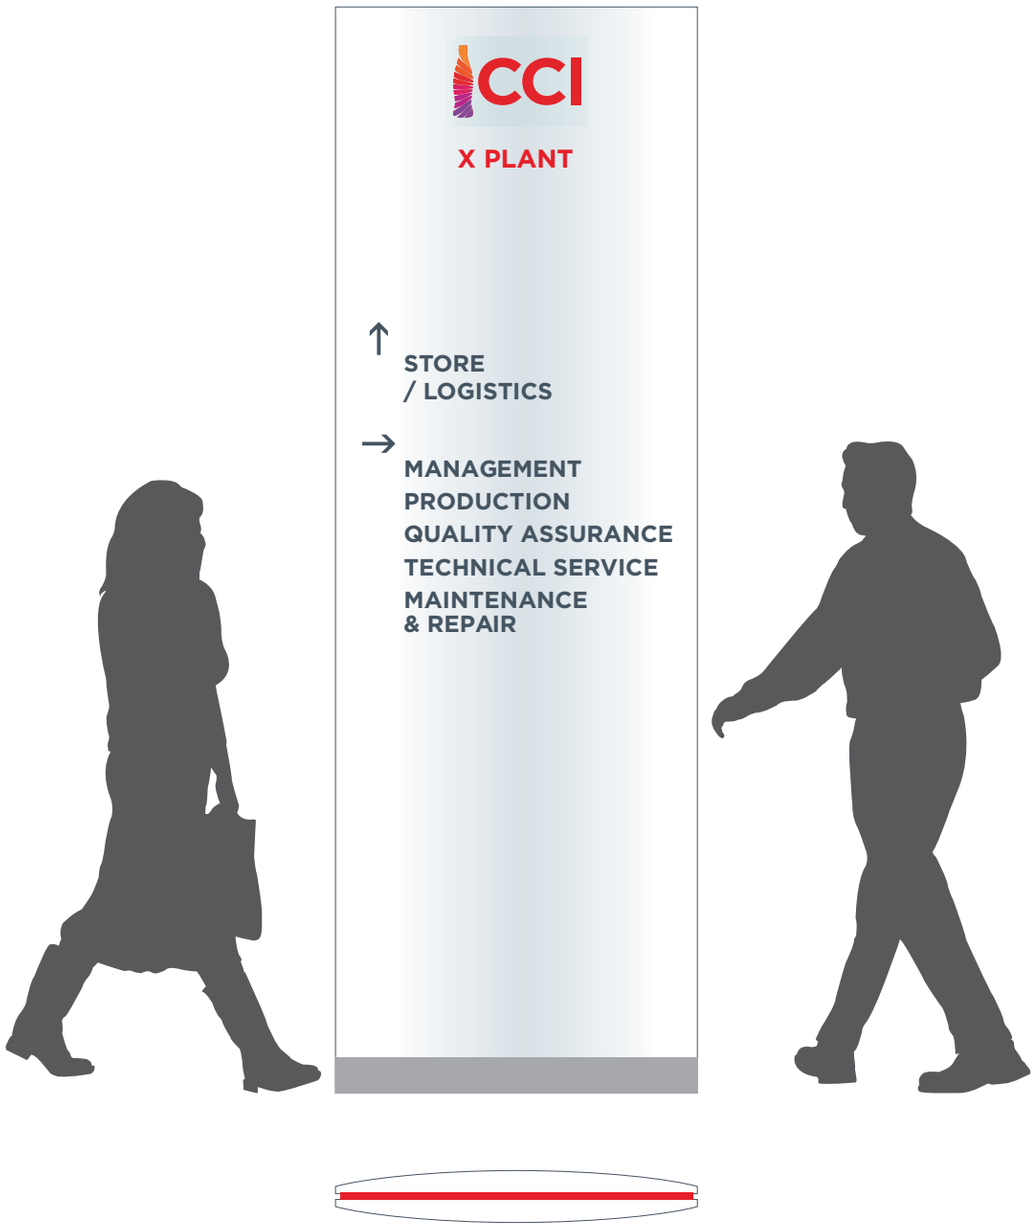

Outdoor Stele

A guide stele on the grounds shows visitors the way to the main department of the respective location. It is positioned at key sites such as the entrance or reception.


Stele Dimensions

Height : 150 cm
Width : 80 cm

Walls

Orientation information is sorted according to the direction and displayed below the espective arrow.



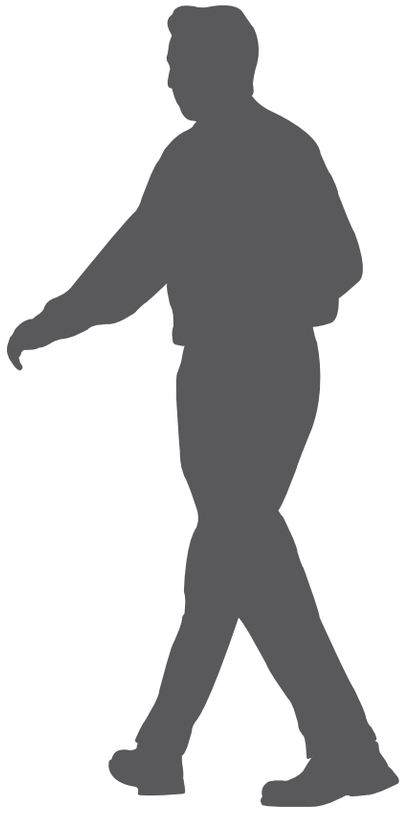




Guides
- Guides on the Wall

Guides applied directly to the wall can show the way within the plant.

Guides on the Wall

Orientation information can be displayed in corridors or applied to the wall above doors.

The information is sorted according to direction.

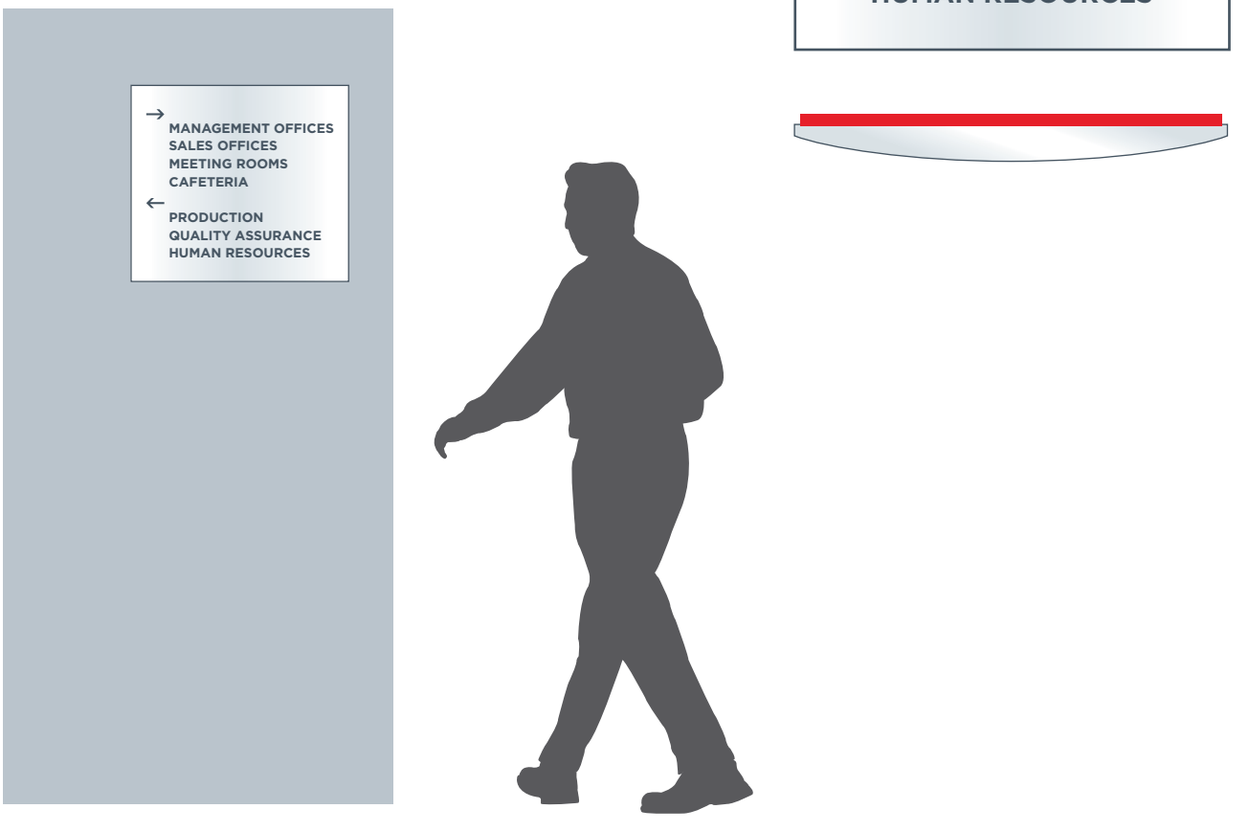

Name Plates

Name plates are used on the doors of the plant staff above a certain grade.

Name Plates


Name plates are composed of two parts.

The first part consists of the photos and the names of the employees and can have one or multiple pieces.


The second part defines the job title.


An example is provided below.

Aluminum Profile Name Plate (With Channels and PVC Splice)

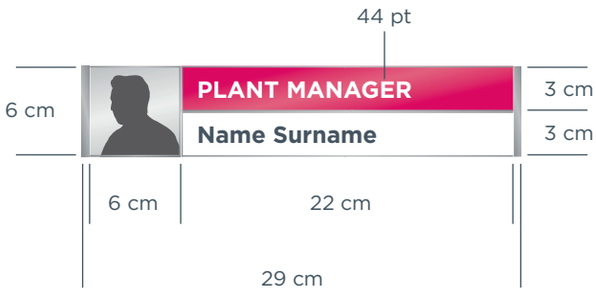



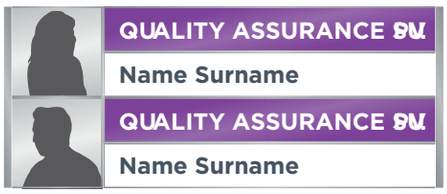

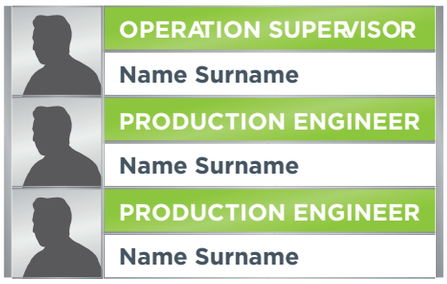



Wall Designs
- Logotypes

Large empty spaces on walls can be used to reflect a theme. In addition to specifying rules or instructions, these gaps can also be used to provide a specific atmosphere for employees and visitors.

Our standard logos to be used in wall designs in all CCI locations:

- CCI Multicolor Bottle Logo
- CCI'm Logo






Wall Designs
- Our Vision

One of the standard themes that should be used in all CCI locations is 'Our Vision'.

Our Vision and Vision Chart

CCI Vision and Vision Chart is one of the basic elements of wall designs. It should be used in accordance with the standard application examples in the following example and should not be changed.

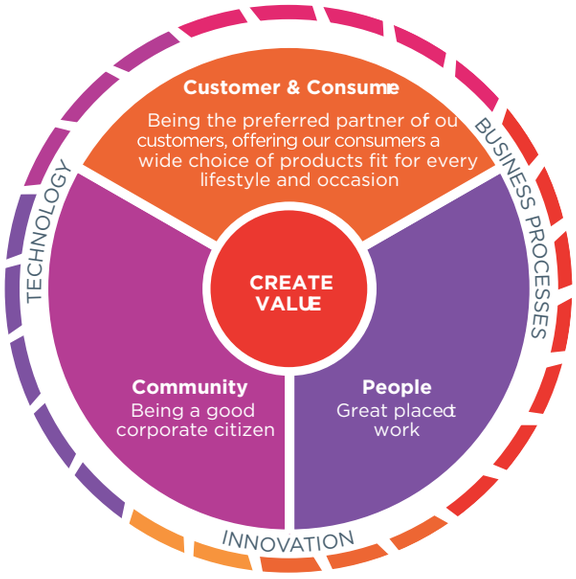



Wall Designs
- Our Core Values

The second one of our standard themes that should be used in all CCI locations is our Values.

Our Values

Our values can be used visually different.

2 examples are given below. They can be varied without compromising the basic design elements.

Our Values - DNA


If the use of our values in the DNA format below is preferred, no changes should be made to this image.






Wall Designs
- ‘Our Vision’ and ‘Values’ Applications

Design examples related to our Vision and Values which can be used in different walls of plants are as follows.

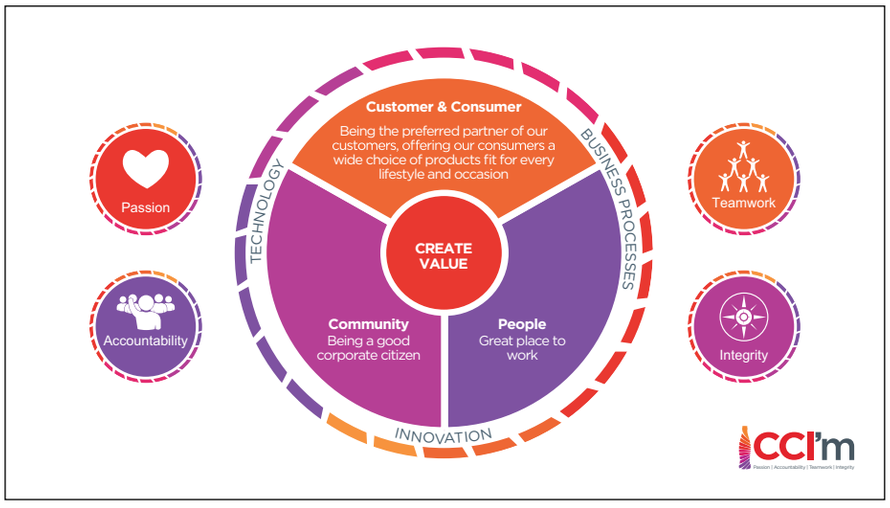

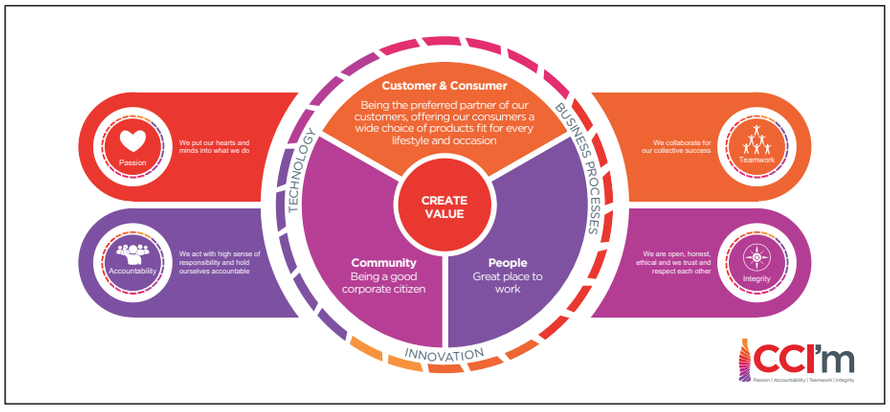

Wall Designs
- ‘Our Values’ Applications

The design examples of Our Values that can be used in different walls of plants are given below.






Wall Designs
- ‘CCI Map’ Application

The design examples of CCI Map that can be used in different walls of plants are given below.


Multicolor Map

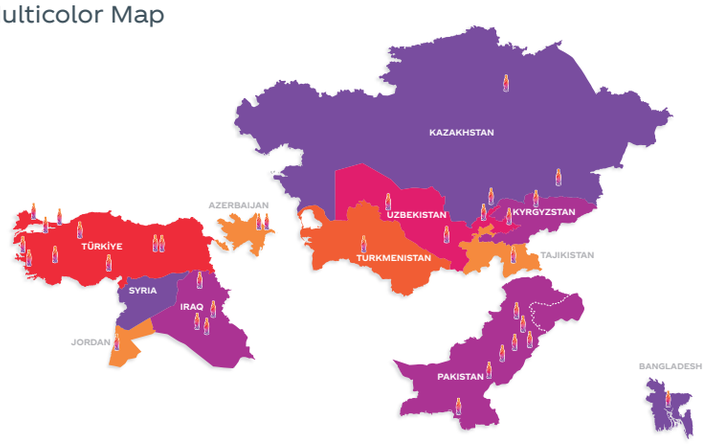


Grey Map



Red Map

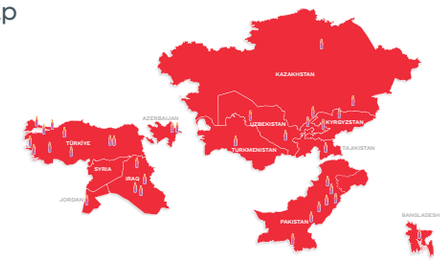

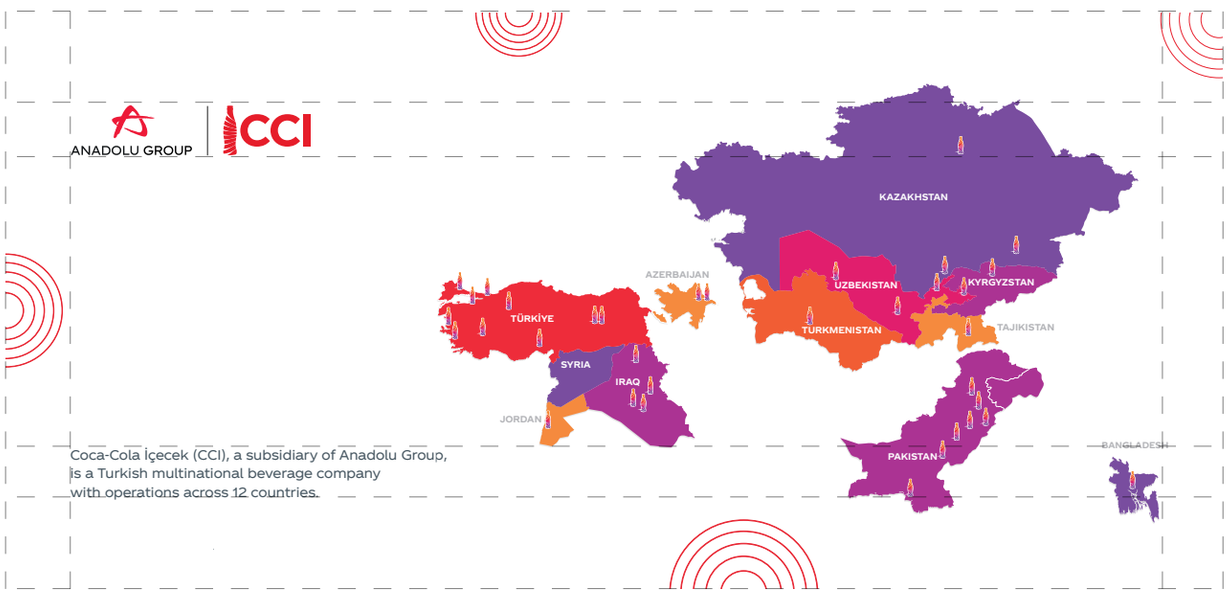

The overall size of the design may vary depending on the wall dimensions; however, the logo, text, and map must be applied in specific, predefined sizes.

The map and logos to be used must be the most up-to-date versions. Please consult the PAC team for further information.

Digital Screens

Digital displays of news and announcements about CCI are used both in CCI offices and in plants.

These screens broadcast the news and announcements to all employees via the central broadcasting system.

Screen Placements

The digital screens should be placed in the areas such as the entrances and exits of the building and the cafeterias which are constantly frequented spaces.

Please get in contact with Corporate Affairs department for further applications.

Moden and Size


Digital displays should be placed vertically.

Screen size 63x110 cm.

Its place should be a point where electricity and internet connection can be made.

Broadcasting

The contents of the digital screens are planned by CCI HQ and the broadcasts of these screens are carried out centrally.

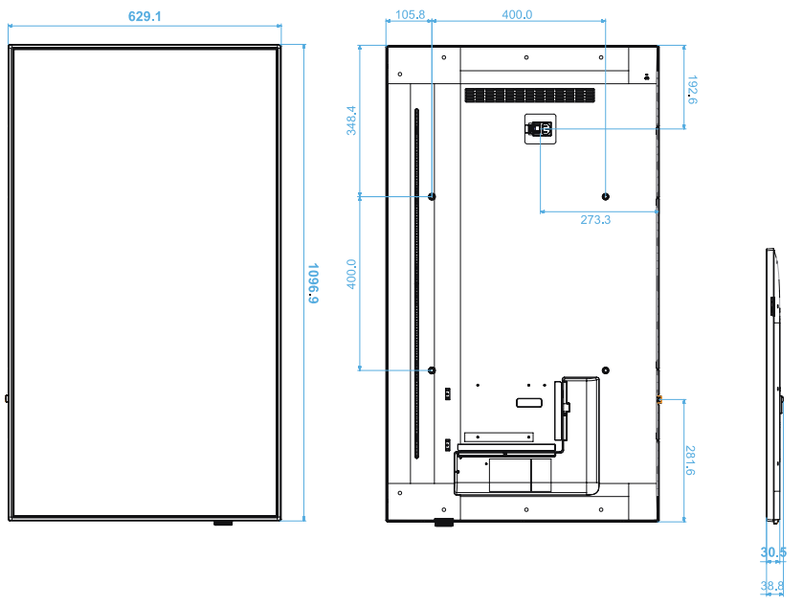





Information Panels

Information panels are used for internal communication. Here, information can be changed, posted, and exchanged according to subject matter.

Information Panels for Departments

Information panels have two different versions with the same size.

The first version is the main panel which includes both A4 and A3 size pockets.

The second version includes only horizontal and vertical A4 size pockets. Panels can be placed next to one another, used with a rack or as freestanding.

Measures and Pockets

Metal information panel, 90cm x140 cm- Electrostatic oven drying, in department color.

Magnetic Header Sheet:
Magnetic Department Name put on White Background; PRODUCTION, QUALITY ASSURANCE


Magnetic Header put on White Background;
Exp: Environment; KPIs etc.


Magnetic Information Pocket;
Gray, DIN A4 size, Kaiser Kraft P/N: 605087 , page 947

Magnetic Information Pocket;
Red, DIN A4 size, Kaiser Kraft P/N: 605084, page 947

Magnetic Header Pocket;
Gray, DIN A4 size, Kaiser Kraft P/N: 756570, page 947

Magnetic Header Pocket;
Red, DIN A4 size, Kaiser Kraft P/N: 756568, page 947

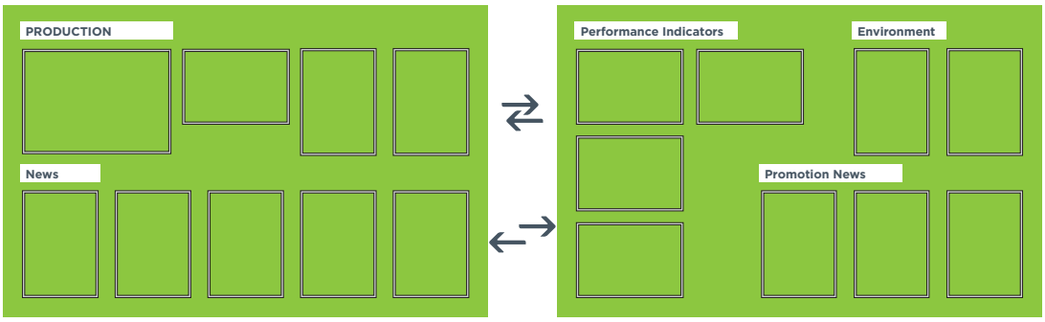

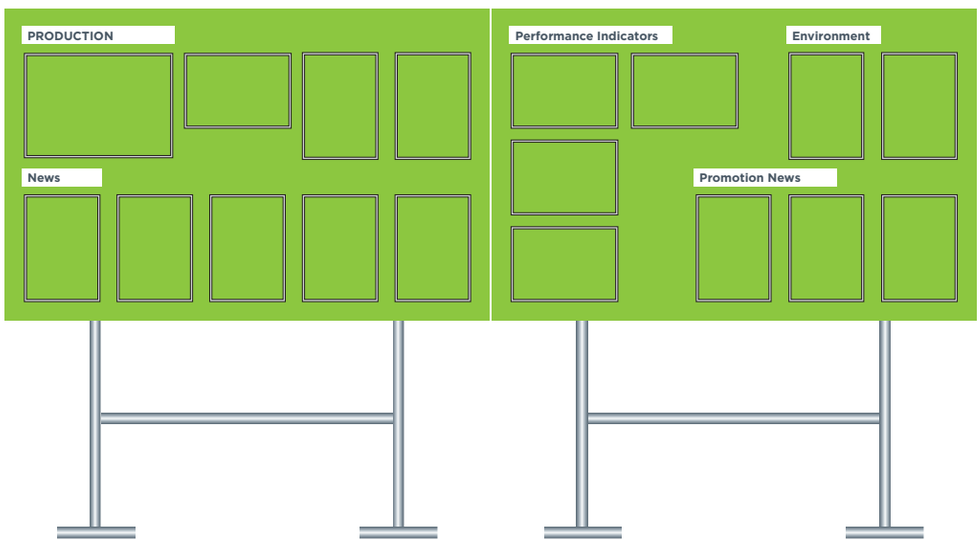


Wall Designs
- ‘Our Values’ Applications

Vertical Usage Measure

Metal Notice Board can be used in vertical format 70cm x 90cm for smaller areas.

The panels will be painted electrostatic furnace in the department color in accordance with the standards.

All usage standards defined on the previous page also apply to this size.

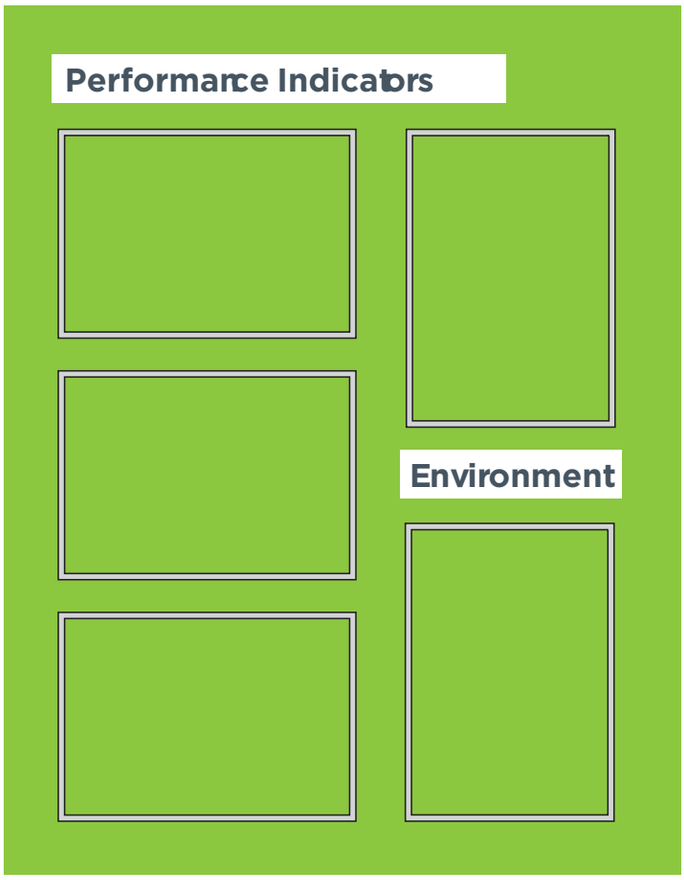



Information Panels


Departments


Information panels are prepared separately for every department.


Announcements are posted on these panels which are prepared according to the below color standards corresponding to various departments.

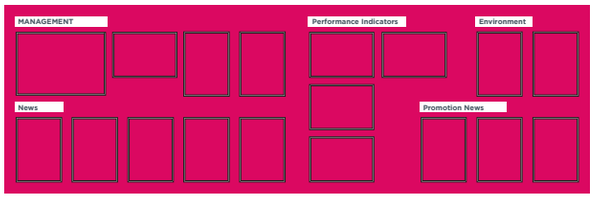


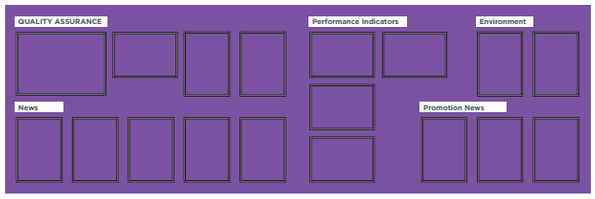

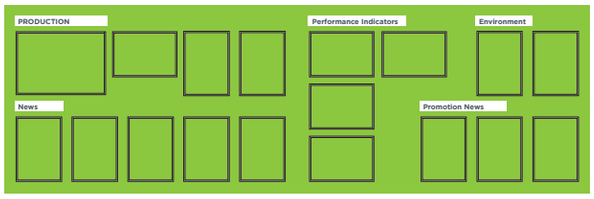

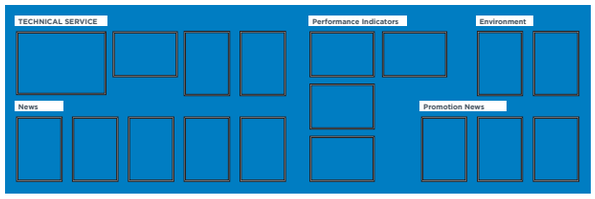

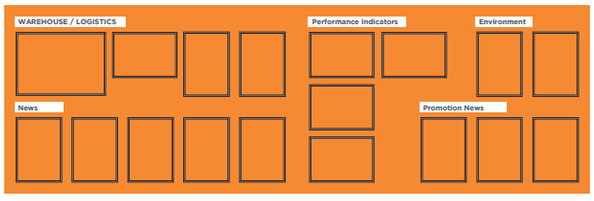

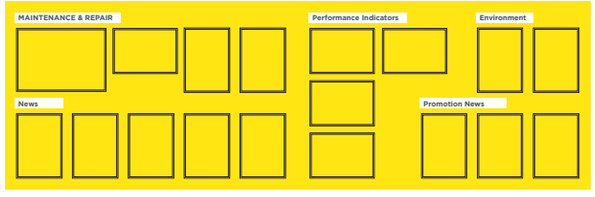

Information Panels

Health and Safety announcements are communicated to employees via special H&S panels instead of standard panels.

Health and Safety Panels

H&S panels have two different versions with the same size.

The first version is the main panel which includes both A4 and A3 size pockets.

The second version includes only horizontal and vertical A4 size pockets.

Panels can be placed next to one another, used with a rack or as freestanding.

Measures and Pockets

H&S panel, 90cm x140 cm- Electrostatic oven drying in white color.

Magnetic Header Sheet:

Magnetic Name put on White Background.

Magnetic Header put on White Background.


Magnetic Information Pocket;
Gray, DIN A4 size.
P/N: 119940 49


Magnetic Information Pocket;
Red, DIN A4 size.
P/N: 119912 49

Magnetic Header Pocket;
Gray, DIN A4 size.
P/N: 756570, Page 947

Magnetic Header Pocket;
Red, DIN A4 size.
P/N: 756568, Page 947

kaiserkraft.com.tr

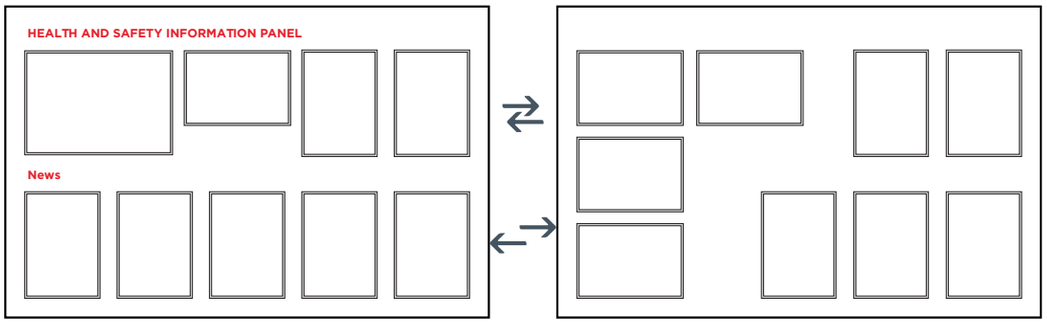

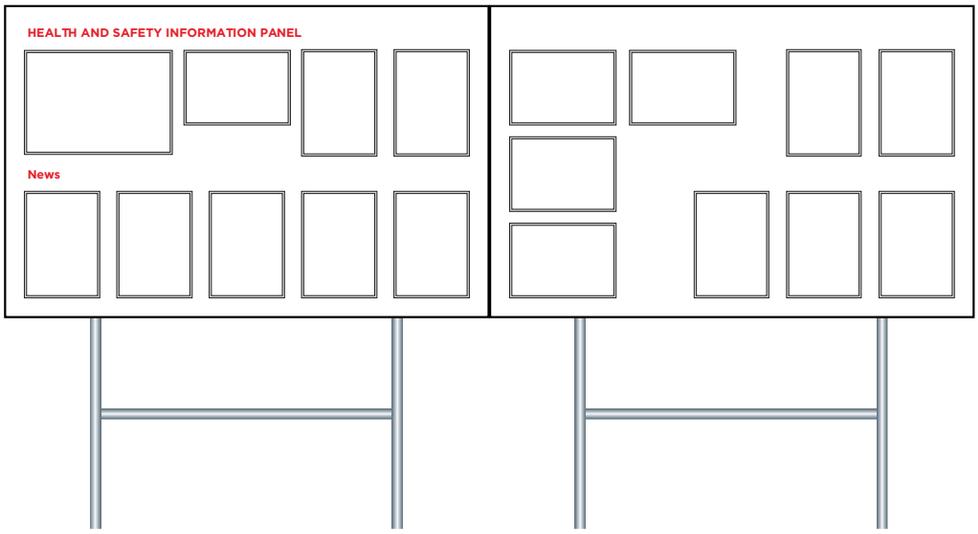

H&S Reporting Panels
- Near MISS Reporting Panel

Occupational Health and Safety reporting panels are prepared with colors and marks to distinguish it from other panels. These panels should be used in easily visible spots.

Occupational Health and Safety Reporting Panels

The reporting panel should be identified with warning colors and signs.

The panel should consist of two sections; an open section (for blank forms) and a locked section (for completed forms).


Dimensions and Specifications

Metal Notice Board
Dimensions: 65cm x 45cm.

Background:
Alucobond; Aluminum composite material or a similar alternative.

Boxes:
Aluminum or similar material. The “Completed Forms” box to the right should be locked.

The (–) and (+) signs on the boxes, and the slit on the box to the right should be laser cut.

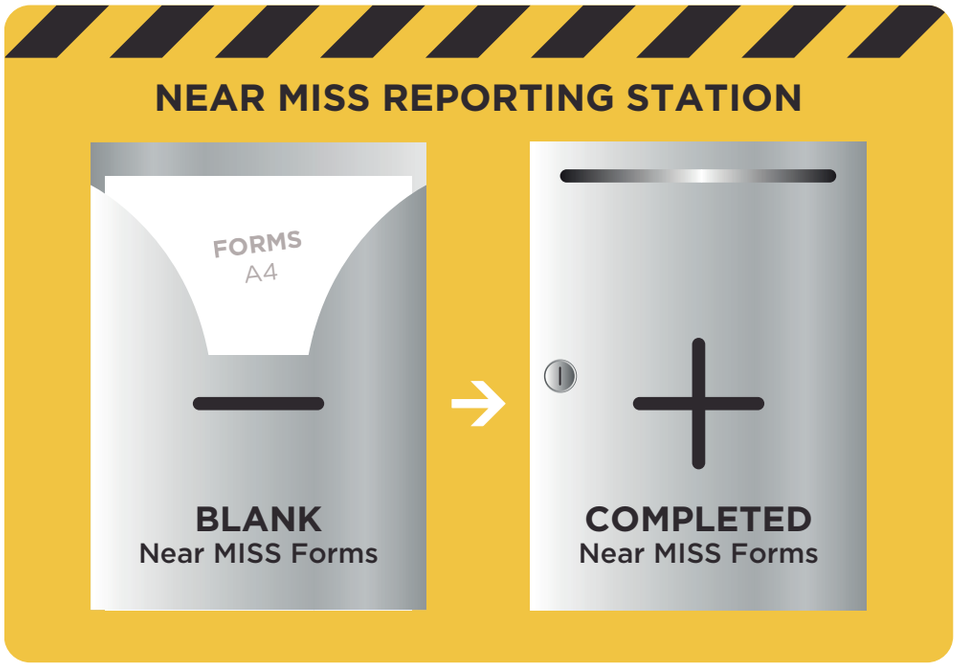

H&S Information Posters

Corporate materials prepared to increase general awareness on Health and Safety should be used at points of high visibility in all locations including the plants.

Posters

Posters are created with horizontal and vertical layouts for indoor use.

Measures

35x50 cm
50x70 cm

H&S Facade and Road Panels

These panels are prepared for outdoor use in horizontal format.

Facade panels should be prepared according to the width and the height of the application area.

Standing road side panels have a size of 35x50 cm and should be used in appropriate locations on the sides of the pedestrian walkways.










H&S Operation Uniforms
- Bondit Jacket

Fabric: Bondit
Trim: Bondit (Neon Yellow)
Composition: 100 % polyester




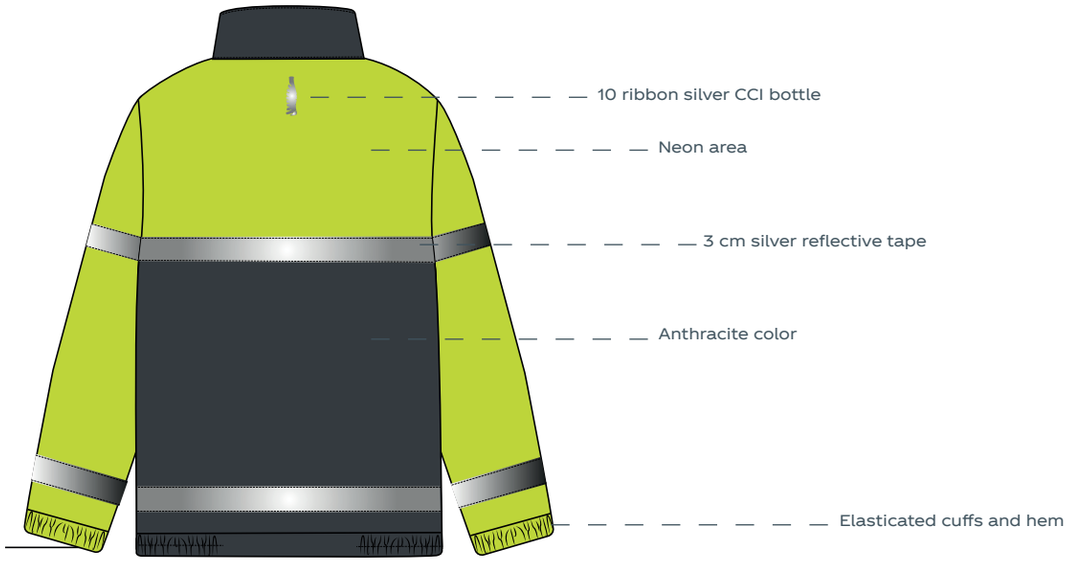


NOTE: The jacket pattern must be identical to the 2023 operations jacket.

H&S Operation Uniforms
- Softshell Vest

Fabric: Softshell
Trim: Softshell (Neon Yellow)
Composition: 100% polyester

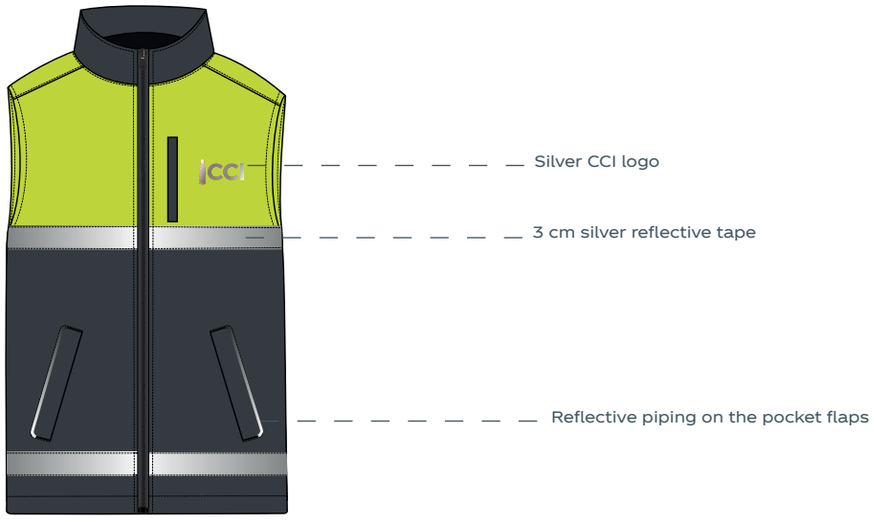

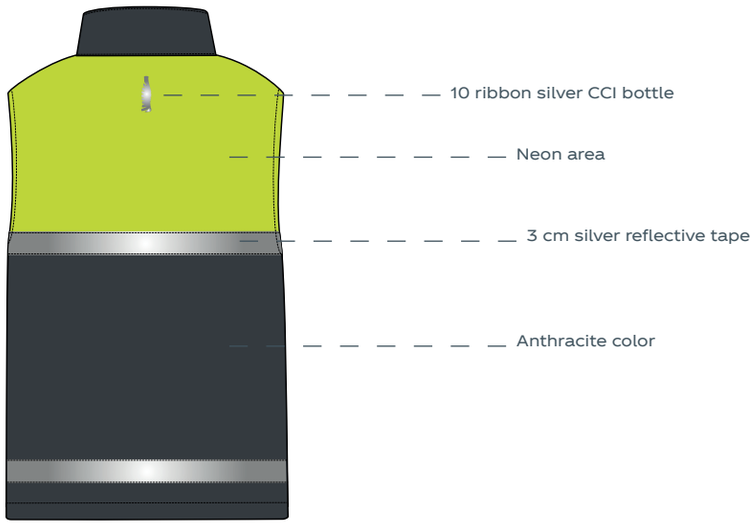

NOTE: The pocket bags shall be attached to the garment body with a wider attachment surface.
The softshell pattern must be identical to the 2023 operations softshell.

H&S Operation Uniforms
- T-Shirt

Fabric: Jersey pique
Trim: Jersey pique (neon yellow)
Composition: 60% cotton, 40% polyester





NOTE: The t-shirt pattern must be identical to the 2023 operation t-shirt. Print quality must be carefully controlled, and no peeling shall be permitted.

H&S Operation Uniforms
- Sweatshirt

Fabric: Brushed three-thread fleece
Trim: Brushed three-thread fleece (neon yellow)
Composition: 65% cotton, 35% polyester





NOTE: The sweatshirt pattern must be identical to the 2023 operations sweatshirt.
Print quality must be carefully controlled, and no peeling shall be permitted.


H&S Operation Uniforms
- Pants (Winter & Summer)


Winter Pants

Fabric: 290g blended fabric
Trim: 290g blended fabric
Composition: 55% cotton, 45 % polyester

Summer Pants

Fabric: 200g blended fabric
Trim: 200g blended fabric
Composition: 55% cotton, 45% polyester

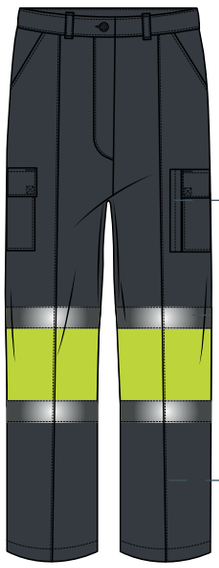

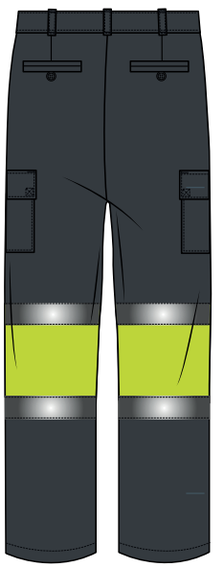

NOTE: The pants pattern must be identical to the 2023 operations pants.

Miscellaneous


The following standards should be used for permanent information panels and boards used inside the company premises.


Measures and Text


A3 size (297x420 mm) should be used for the permanent message boards.


Message heading font size should be 48 and the text font size should be minimum 14.


Some examples are given below.

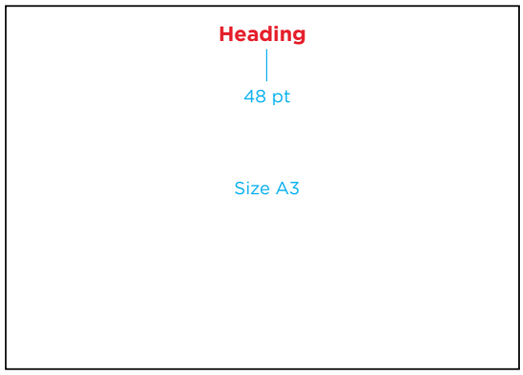

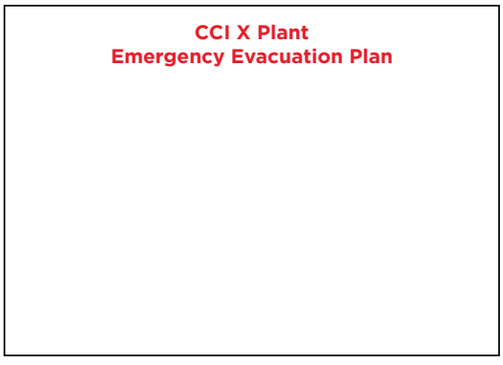

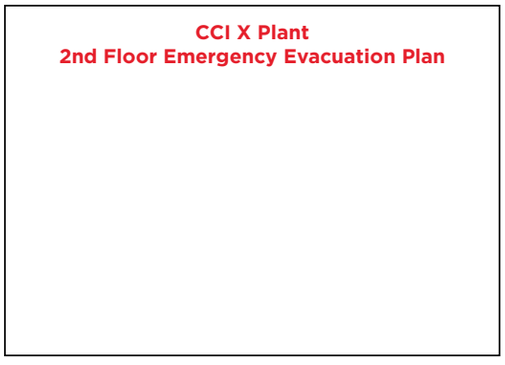

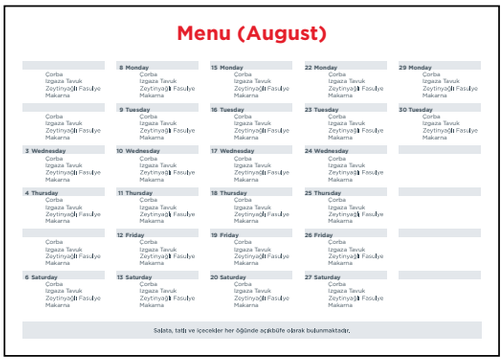

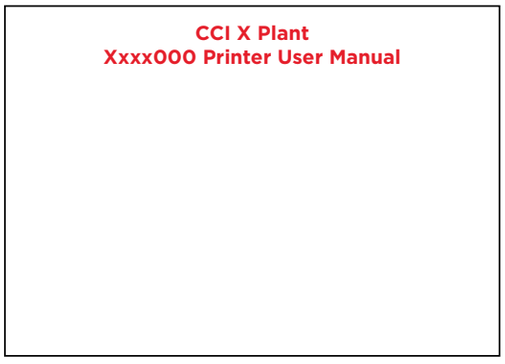

Hygiene Zone	Color Code	Related Area	Jewelry	Food/Drink	Bonnet/Cap	Shoe Cover	Safety Shoes	Hand Cleaning Station	Hand Disinfectant	Hygienic Doormat	Latex Gloves	Mask
Hygiene Zone 1		Syrup Room	N✗	N✗	Y✓	H✗	Y✓	Y✓	Y✓	Y✓	Y✓	Y✓
		Filling Rooms and Cabinets	N✗	N✗	Y✓	Y✓	Y✓	Y✓	Y✓	N✗	Y✓	Y✓
		Captage & Water Storage	N✗	N✗	Y✓	Y✓	Y✓	N✗	Y✓	N✗	N✗	Y✓
		Microbiology Laboratory	N✗	N✗	Y✓	Y✓	Y✓	Y✓	Y✓	Y✓	N✗	N✗
		Cooking Room	N✗	Y✓	Y✓	Y✓	N✗	Y✓	Y✓	Y✓	Y✓	Y✓
Hygiene Zone 2		Filling Area	N✗	N✗	Y✓	N✗	Y✓	Y✓	Y✓	Y✓	N✗	N✗
		Concentrate Storage Rooms	N✗	N✗	Y✓	N✗	Y✓	N✗	N✗	N✗	N✗	N✗
		Water Treatment Area	N✗	N✗	Y✓	N✗	Y✓	Y✓	Y✓	Y✓	N✗	N✗
		Liquid Sugar Incoming Room	N✗	N✗	Y✓	N✗	Y✓	Y✓	Y✓	Y✓	N✗	N✗
		Sugar Dumping Area	N✗	N✗	Y✓	N✗	Y✓	N✗	N✗	N✗	N✗	N✗
		Pet Production Area	N✗	N✗	Y✓	N✗	Y✓	Y✓	Y✓	N✗	Y✓	N✗
		Preform Production Area	N✗	N✗	Y✓	N✗	Y✓	Y✓	Y✓	N✗	Y✓	N✗
		Preform Grinding Area	N✗	N✗	Y✓	N✗	Y✓	N✗	Y✓	N✗	Y✓	Y✓
		CIP Room	N✗	N✗	Y✓	N✗	Y✓	N✗	N✗	N✗	N✗	N✗
		Laboratories (Excluding Micro)	N✗	N✗	Y✓	N✗	Y✓	Y✓	Y✓	N✗	N✗	N✗
Hygiene Zone 3		Labeling Area	N✗	N✗	Y✓	N✗	Y✓	N✗	N✗	N✗	N✗	N✗
		Packageing Area	N✗	N✗	Y✓	N✗	Y✓	N✗	N✗	N✗	N✗	N✗
		Warehouse (Beverage)	N✗	N✗	Y✓	N✗	Y✓	N✗	N✗	N✗	N✗	N✗
		Palletizing Area	N✗	N✗	Y✓	N✗	Y✓	N✗	N✗	N✗	N✗	N✗
		Aisles to Warehouse	N✗	N✗	Y✓	N✗	Y✓	N✗	N✗	N✗	N✗	N✗
		Material Warehouse	N✗	N✗	Y✓	N✗	Y✓	N✗	N✗	N✗	N✗	N✗
		Archive/Retention Sample Rooms	N✗	N✗	Y✓	N✗	Y✓	N✗	N✗	N✗	N✗	N✗
		Maintenance Workshop (Electrical and Mechanical)	N✗	N✗	Y✓	N✗	Y✓	N✗	N✗	N✗	N✗	N✗
		Utilities (Boiler Room, Cooling System Room, Generator Room, Electrical Panel Room, Compressor Room etc.)	N✗	N✗	Y✓	N✗	Y✓	N✗	N✗	N✗	N✗	N✗
		Offices/Meeting and Training	Y✓	Y✓	N✗	N✗	N✗	N✗	N✗	N✗	N✗	N✗
		Server Room	Y✓	N✗	N✗	N✗	N✗	N✗	N✗	N✗	N✗	N✗
		Chemical Storage Rooms	N✗	N✗	Y✓	N✗	Y✓	N✗	N✗	N✗	N✗	N✗
		Painting Storage Rooms	N✗	N✗	Y✓	N✗	Y✓	N✗	N✗	N✗	N✗	N✗
		Spare Part Storage Rooms	N✗	N✗	Y✓	N✗	Y✓	N✗	N✗	N✗	N✗	N✗
		Office Material Storage Rooms	Y✓	N✗	N✗	N✗	N✗	N✗	N✗	N✗	N✗	N✗
		Production Area Tour Halls	Y✓	N✗	N✗	N✗	N✗	N✗	N✗	N✗	N✗	N✗
		Doctor Room	Y✓	N✗	N✗	N✗	N✗	Y✓	Y✓	N✗	N✗	N✗
		Cafeteria	Y✓	Y✓	N✗	N✗	N✗	N✗	Y✓	N✗	N✗	N✗
		Dress Change Rooms	Y✓	N✗	N✗	N✗	N✗	N✗	N✗	N✗	N✗	N✗
Others		Outside Area (Wells, Waste Area, Loading Area, Pallet Repair Area, Roof Area etc.)	Y✓	N✗	N✗	N✗	Y✓	N✗	N✗	N✗	N✗	N✗
		Waste Water Treatment Area	Y✓	N✗	N✗	N✗	Y✓	Y✓	Y✓	N✗	N✗	N✗
		Toilets	Y✓	N✗	N✗	N✗	Y✓	Y✓	Y✓	N✗	N✗	N✗
		Glass Fragment (Note: Filling room and cabinets related to glass lines' cleaning materials are to be labelled both yellow and red.)	na	na	na	na	na	na	na	na	na	na

Y✓ YES
N✗ NO

www.cci.com.tr



Dudullu OSB Mah. Deniz Feneri Sokak No:4
Ümraniye/İstanbul TÜRKİYE