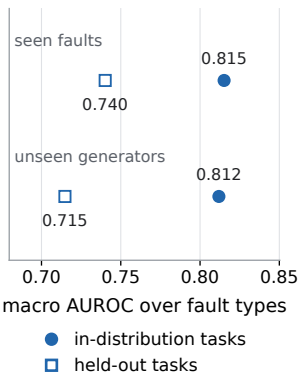


a Which signal sees which fault (AUROC)

	validation-selected		candidate integrity signals					
insole missing ID / seen	.928	.940	.478	.945	.929	.859	.500	.319
IMU bias ID / seen	.502	.504	.534	.504	.504	.502	.500	.514
stuck IMU ID / seen	.960	.960	.479	.659	.645	.965	1.000	.492
burst packet loss ID / unseen	.743	.886	.498	.504	.515	.922	.055	.502
partial dropout OOD / unseen	.813	.802	.500	.501	.507	.961	1.000	.500
delay jitter OOD / unseen	.766	.559	.481	.550	.543	.499	.963	.504
	Detector-all	Detector-online	Fault logit	Recon. residual	Forecast residual	Stale-ness	Coher-ence	Drift

0 0.5 1
below chance ← chance → above chance

b Detector-online, macro AUROC

3 seeds; detector subset and q90 scales frozen on validation data, candidates limited to K_{gate} .