

OLM Open Tools OLM KiraKira User Manual

OLM Digital, Inc



Table of Contents

1. Introduction	4
1.1 Supported Environments	4
1.2 Install	4
2. Using OLM KiraKira	4
3. OLM KiraKira parameters	5
4. Other	8

Copyright, End User License Agreement

OLM Open Tools are licensed under the Apache License, Version 2.0.


Change Logs

2016/06/13 First Version
2017/11/02 Change License terms

Adobe, After Effects are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States and/or other countries.

1. Introduction

OLM KiraKira is an effect plugin that can generate glowing effects from a picture highlights. Simple sparks and glowing effect is generated by combining vertical, horizontal and diagonal blur from the highlights alpha, luminance or RGBA channels.

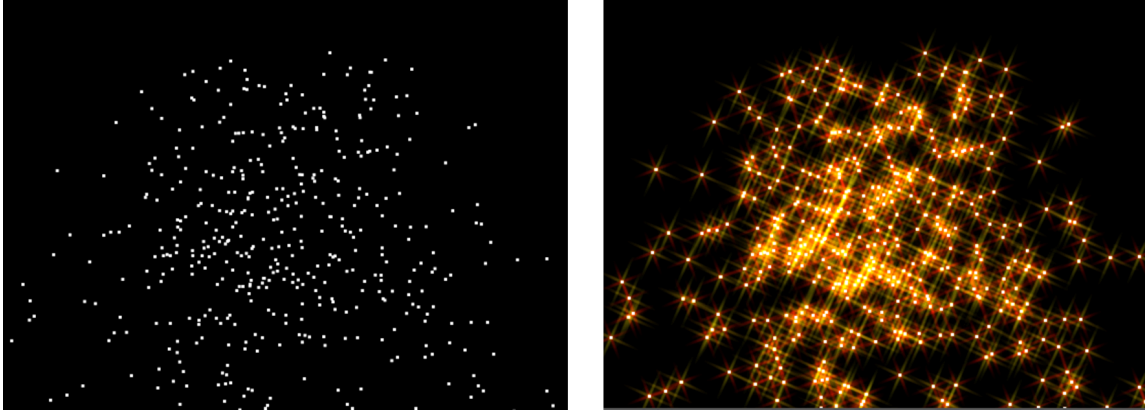

Result of applying OLM KiraKira
(left: before, right: after)

1.1. Supported Environments

Please refer to OLM Open Tools [website](#) for a complete list of supported environment.

1.2. Install

The zip archive you can download from OLM OpenTools web site contains the files listed in the following table. To install OLM Kirakira copy the plug-in file (for windows: OLMkirakira.aex) in A E plug-in directory
(example : C:\Program Files\Adobe\Adobe After Effects 2022\Support Files\Plugin-ins\OLM)

Folder	File Name	Explanation
Plugins\64\[Version]	OLMKiraKira.aex	The plug-in files.
Doc	OLMKiraKiraUserManual.pdf	The user manual of OLM KiraKira

Content of the zip archive


After Effects plugins from OLM Open Tools use Visual C++ 2019 runtime. They require the installation of Visual C++ Redistributable that supports Visual C++2019. After Effects usually ships with a compatible version, but if the plugin does not work please install the [latest Visual C++ Redistributable](#) yourself.

2. Using OLM KiraKira

To apply the effect, use the menu: (Effects)→(OLM Plug-ins)→(OLM KiraKira)

3. OLM KiraKira parameters

OLM KiraKira parameters are as follows:

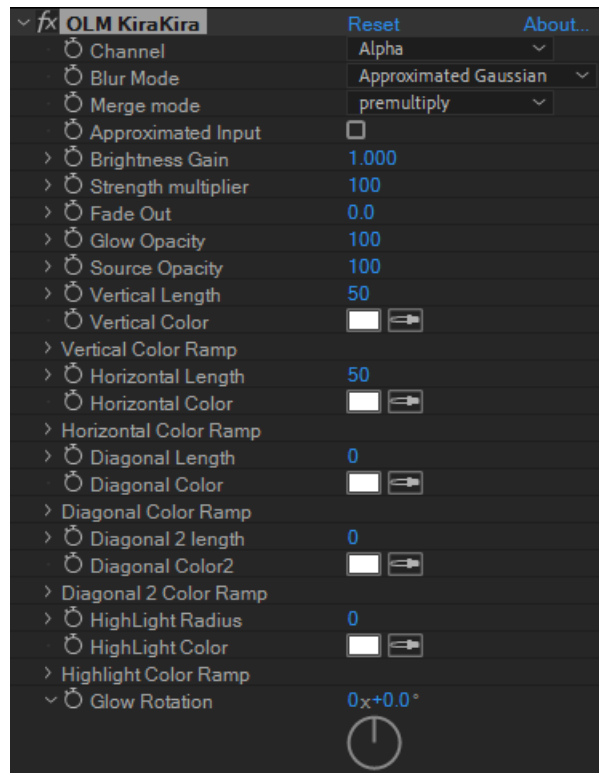

OLM KiraKira parameters


- **Channel**

You can choose between 4 channels to generate the glow effect.
(Default is Alpha)

- Alpha: Use the alpha channel of the input
- Luminance: Use the luminance of the input
- RGB: use RGB+alpha
- Brightness: use the biggest value of the R, G or B channel

OLMK i r a K i r a

input

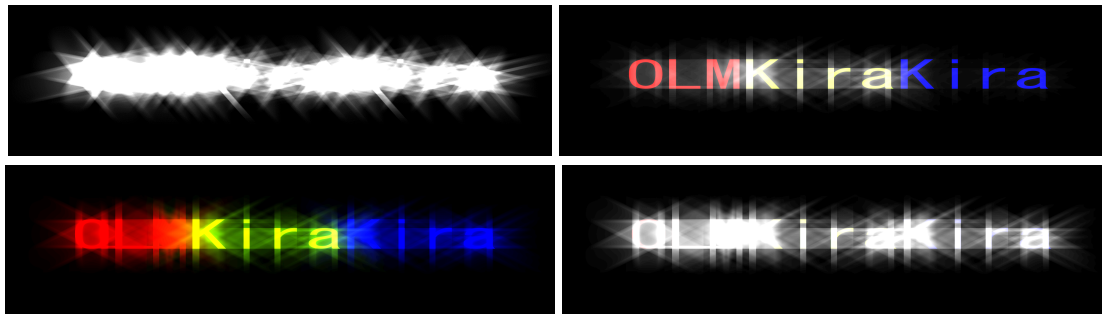


Results depending on Channel


(up left: Alpha (letter alpha=255, black alpha=0),
upper right: Luminance, lower left: RGB, lower right: Brightness)

- **Blur Mode**

Specify the type of blur (default is Approximated Gaussian). Box is fast but not as smooth as Gaussian. Choose a mode according to the look and rendering time you target.

- Box: a simple box blur
- Approximated Gaussian: approximates Gaussian with box blur
- Gaussian: typical Gaussian blur
- Exponential: long tail blur

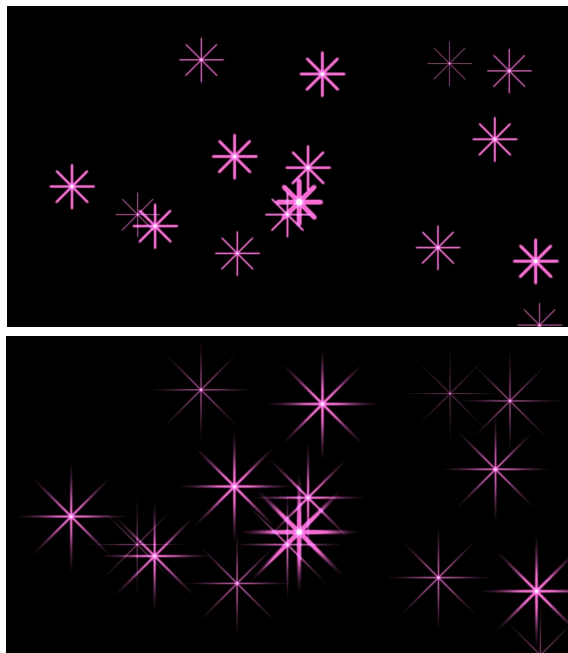

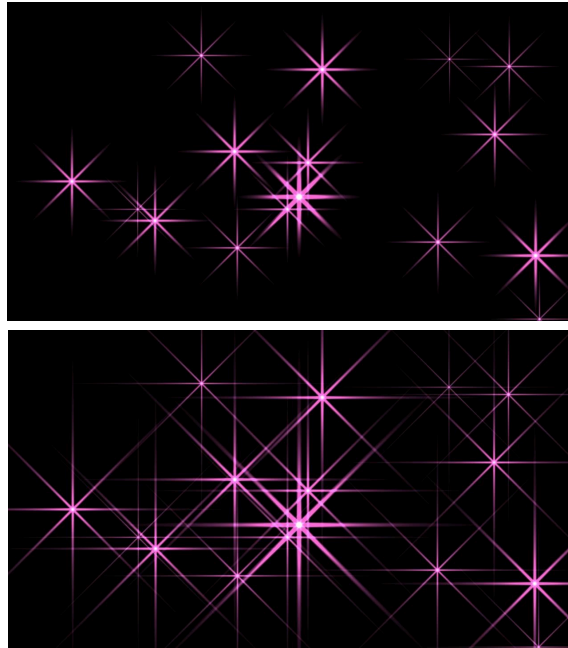

Results depending on Blur Mode

(first line: Box, second line: Approximated Gaussian, third line: Gaussian, bottom: Exponential)

- **Merge Mode**
Composite mode between an input layer and generated glow
 - add: weighted sum with alpha value
 - premultiply: weighted average with alpha value
- **Approximated Input**
When on, the input resolution will be reduced to accelerate rendering time while producing a more blurred result (default is off). Turn on or off according to the look and rendering time you target.
- **Brightness Gain**
Intensity of the glow. The slider shows value from 0 to 200, but values up to 1000 can be set (default is 1).
- **Threshold (Strength Multiplier)**
Threshold the input according to the Channel mode. Only the values above the threshold value will be processed (default 0%, which means that the every pixel of the input will be processed)
- **Fade Out**
The fade out parameter is used when the **Channel** used is either Brightness or Luminance. It will smooth especially the effect of the **Threshold** parameter.
- **Glow Opacity**
the opacity of the glow effect (default is 100)
- **Source Opacity**
the opacity of the input layer (default is 100)
- **Vertical Length✖**
The vertical glow length. Slider can be set from 0 to 200, but values can be set up to

- 1000 (default is 50)
 - **Vertical Color**
The vertical glow color (default is white)
 - **Vertical Color Ramp**
The vertical glow color ramp
 - Use Ramp: Check it to use a ramp instead of a single color
 - Ramp: Ramp color control
 - **Horizontal Length※**
The horizontal glow length. Slider can be set from 0 to 200, but values can be set up to 1000 (default is 50)
 - **Horizontal Color**
The horizontal glow color (default is white)
 - **Horizontal Color Ramp**
The horizontal glow color ramp
 - Use Ramp: Check it to use a ramp instead of a single color
 - Ramp: Ramp color control
 - **Diagonal Length※**
The diagonal glow length (when glow rotation is 0, add glow on 45 and 135 degrees directions). Slider can be set from 0 to 200, but values can be set up to 1000 (default is 0)
 - **Diagonal Color**
The diagonal glow color (default is white)
 - **Diagonal Color Ramp**
The diagonal glow color ramp
 - Use Ramp: Check it to use a ramp instead of a single color
 - Ramp: Ramp color control
 - **HighLight Radius※**
The radius of the highlight glow. Slider can be set from 0 to 200, but values can be set up to 1000 (default is 0)
- ※ When Vertical, Horizontal, Diagonal Length or HighLight Radius are set to 0, the corresponding process will be skipped. If you don't need that effect, then just set the value to 0.
- **Highlight Color**
the highlight glow color (default is white)
 - **Glow Rotation**
the glow orientation in degree (default is 0)

4. Other

If you find a bug, have a feature request, or for any kind of feedback, feel free to contact us at the following mail address:

opentools@olm.co.jp