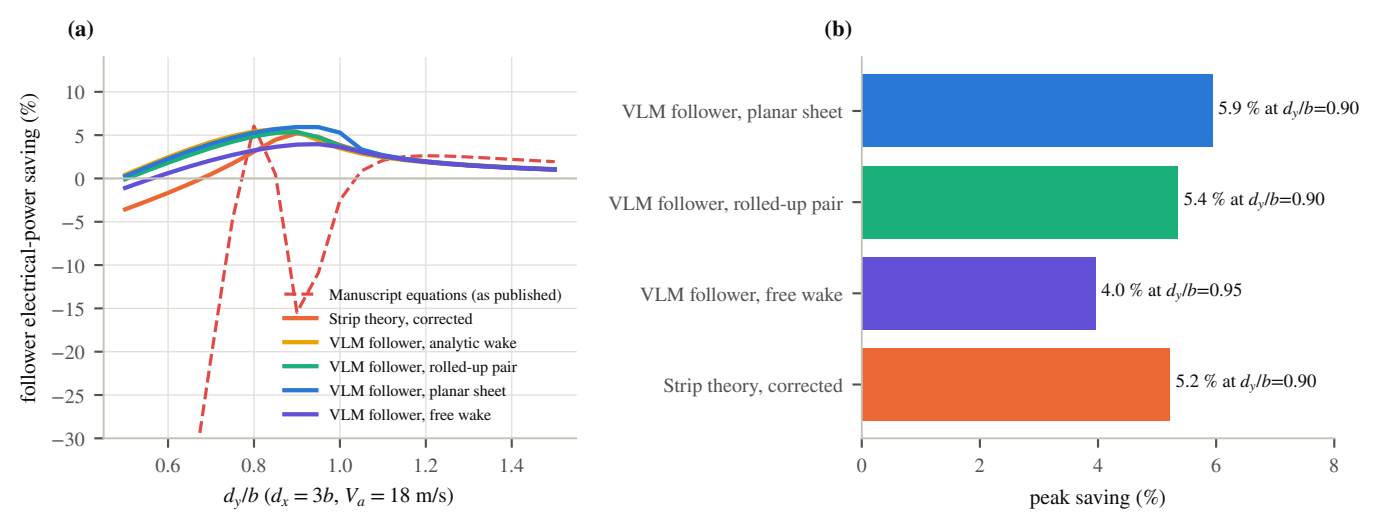
(a)
follower electrical-power saving (%)
10
5
0
−5
−10
−15
−20
−25
−30
0.6
0.8
1.0
1.2
1.4
d_y/b ($d_x = 3b$, $V_a = 18$ m/s)
Manuscript equations (as published)
Strip theory, corrected
VLM follower, analytic wake
VLM follower, rolled-up pair
VLM follower, planar sheet
VLM follower, free wake
(b)
VLM follower, planar sheet
VLM follower, rolled-up pair
VLM follower, free wake
Strip theory, corrected
5.9 % at d_y/b=0.90
5.4 % at d_y/b=0.90
4.0 % at d_y/b=0.95
5.2 % at d_y/b=0.90
0
2
4
6
8
peak saving (%)