

1. Description

1.1. Project

| Project Name | mputest |
|-----------------|-------------------|
| Board Name | STM32F407G-DISC1 |
| Generated with: | STM32CubeMX 6.9.1 |
| Date | 09/22/2023 |


1.2. MCU

| MCU Series | STM32F4 |
|----------------|---------------|
| MCU Line | STM32F407/417 |
| MCU name | STM32F407VGTx |
| MCU Package | LQFP100 |
| MCU Pin number | 100 |

1.3. Core(s) information

| Core(s) | Arm Cortex-M4 |
|---------|---------------|

2. Pinout Configuration

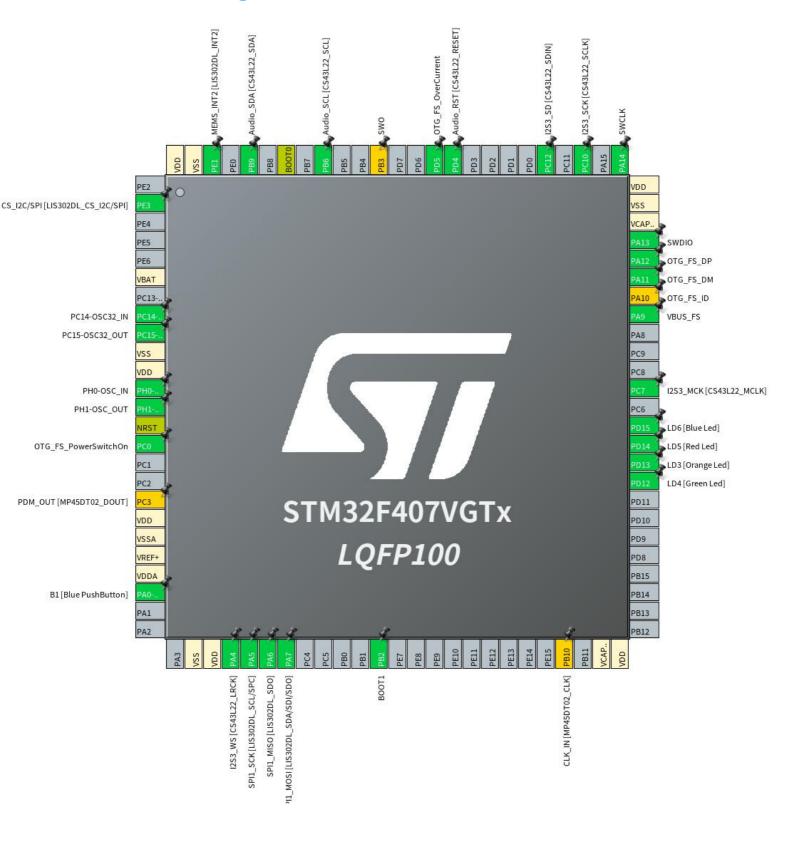

3. Pins Configuration


| Pin Number LQFP100 | Pin Name (function after reset) | Pin Type | Alternate Function(s) | Label |
|-----------------------|---------------------------------------|----------|--------------------------|-------------------------------------|
| 2 | PE3 * | I/O | GPIO_Output | CS_I2C/SPI [LIS302DL_CS_I2C/SPI] |
| 6 | VBAT | Power | | |
| 8 | PC14-OSC32_IN | I/O | RCC_OSC32_IN | PC14-OSC32_IN |
| 9 | PC15-OSC32_OUT | I/O | RCC_OSC32_OUT | PC15-OSC32_OUT |
| 10 | VSS | Power | | |
| 11 | VDD | Power | | |
| 12 | PH0-OSC_IN | I/O | RCC_OSC_IN | PH0-OSC_IN |
| 13 | PH1-OSC_OUT | I/O | RCC_OSC_OUT | PH1-OSC_OUT |
| 14 | NRST | Reset | | |
| 15 | PC0 * | I/O | GPIO_Output | OTG_FS_PowerSwitchOn |
| 18 | PC3 ** | I/O | I2S2_SD | PDM_OUT |
| | | | | [MP45DT02_DOUT] |
| 19 | VDD | Power | | |
| 20 | VSSA | Power | | |
| 21 | VREF+ | Power | | |
| 22 | VDDA | Power | | |
| 23 | PA0-WKUP | I/O | GPIO_EXTI0 | B1 [Blue PushButton] |
| 27 | VSS | Power | | |
| 28 | VDD | Power | | |
| 29 | PA4 | I/O | 12S3_WS | 12S3_WS [CS43L22_LRCK] |
| 30 | PA5 | I/O | SPI1_SCK | SPI1_SCK [LIS302DL_SCL/SPC] |
| 31 | PA6 | I/O | SPI1_MISO | SPI1_MISO [LIS302DL_SDO] |
| 32 | PA7 | I/O | SPI1_MOSI | SPI1_MOSI [LIS302DL_SDA/SDI/SDO] |
| 37 | PB2 * | I/O | GPIO_Input | BOOT1 |
| 47 | PB10 ** | I/O | I2S2_CK | CLK_IN [MP45DT02_CLK] |
| 49 | VCAP_1 | Power | | |
| 50 | VDD | Power | | |
| 59 | PD12 * | I/O | GPIO_Output | LD4 [Green Led] |
| 60 | PD13 * | I/O | GPIO_Output | LD3 [Orange Led] |
| 61 | PD14 * | I/O | GPIO_Output | LD5 [Red Led] |
| 62 | PD15 * | I/O | GPIO_Output | LD6 [Blue Led] |
| 64 | PC7 | I/O | I2S3_MCK | 12S3_MCK [CS43L22_MCLK] |

| Pin Number LQFP100 | Pin Name (function after reset) | Pin Type | Alternate Function(s) | Label |
|-----------------------|---------------------------------------|----------|--------------------------|------------------------------|
| 68 | PA9 | I/O | USB_OTG_FS_VBUS | VBUS_FS |
| 69 | PA10 ** | I/O | USB_OTG_FS_ID | OTG_FS_ID |
| 70 | PA11 | I/O | USB_OTG_FS_DM | OTG_FS_DM |
| 71 | PA12 | I/O | USB_OTG_FS_DP | OTG_FS_DP |
| 72 | PA13 | I/O | SYS_JTMS-SWDIO | SWDIO |
| 73 | VCAP_2 | Power | | |
| 74 | VSS | Power | | |
| 75 | VDD | Power | | |
| 76 | PA14 | I/O | SYS_JTCK-SWCLK | SWCLK |
| 78 | PC10 | I/O | 12S3_CK | I2S3_SCK [CS43L22_SCLK] |
| 80 | PC12 | I/O | I2S3_SD | I2S3_SD [CS43L22_SDIN] |
| 85 | PD4 * | I/O | GPIO_Output | Audio_RST [CS43L22_RESET] |
| 86 | PD5 * | I/O | GPIO_Input | OTG_FS_OverCurrent |
| 89 | PB3 ** | I/O | SYS_JTDO-SWO | SWO |
| 92 | PB6 | I/O | I2C1_SCL | Audio_SCL [CS43L22_SCL] |
| 94 | воото | Boot | | |
| 96 | PB9 | I/O | I2C1_SDA | Audio_SDA [CS43L22_SDA] |
| 98 | PE1 | I/O | GPIO_EXTI1 | MEMS_INT2 [LIS302DL_INT2] |
| 99 | VSS | Power | | |
| 100 | VDD | Power | | |

^{*} The pin is affected with an I/O function

^{**} The pin is affected with a peripheral function but no peripheral mode is activated

4. Clock Tree Configuration

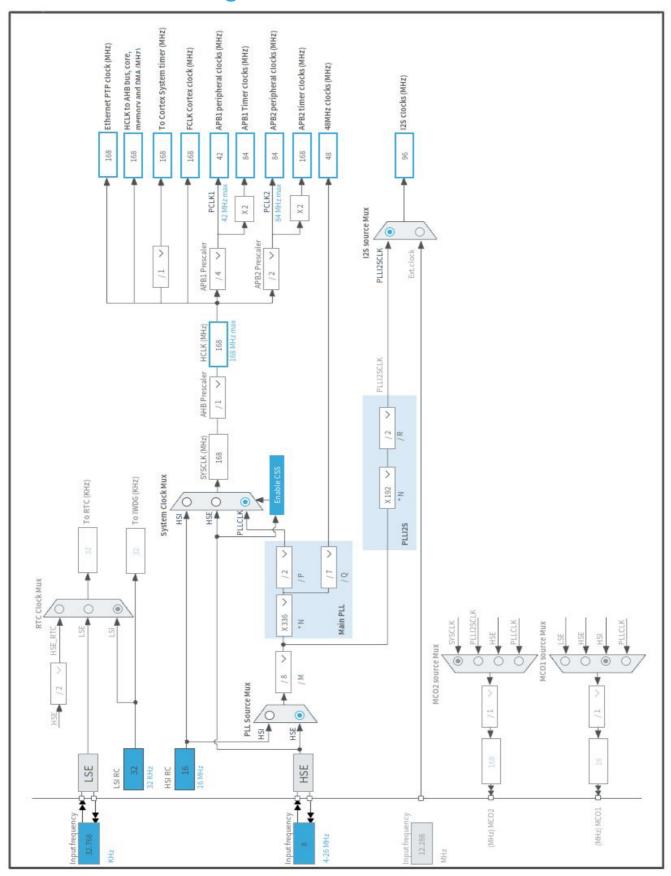

5. Software Project

5.1. Project Settings

| Name | Value |
|-----------------------------------|--|
| Project Name | mputest |
| Project Folder | /home/fewletter/Research/STM32/mputest |
| Toolchain / IDE | STM32CubeIDE |
| Firmware Package Name and Version | STM32Cube FW_F4 V1.27.1 |
| Application Structure | Advanced |
| Generate Under Root | Yes |
| Do not generate the main() | No |
| Minimum Heap Size | 0x200 |
| Minimum Stack Size | 0x400 |

5.2. Code Generation Settings

| Name | Value |
|---|---------------------------------------|
| STM32Cube MCU packages and embedded software | Copy only the necessary library files |
| Generate peripheral initialization as a pair of '.c/.h' files | No |
| Backup previously generated files when re-generating | No |
| Keep User Code when re-generating | Yes |
| Delete previously generated files when not re-generated | Yes |
| Set all free pins as analog (to optimize the power | No |
| consumption) | |
| Enable Full Assert | No |

5.3. Advanced Settings - Generated Function Calls

| Rank | Function Name | Peripheral Instance Name |
|------|--------------------|--------------------------|
| 1 | SystemClock_Config | RCC |
| 2 | MX_GPIO_Init | GPIO |
| 3 | MX_I2C1_Init | I2C1 |
| 4 | MX_I2S3_Init | 1283 |
| 5 | MX_SPI1_Init | SPI1 |
| 6 | MX_USB_HOST_Init | USB_HOST |

1. Power Consumption Calculator report

1.1. Microcontroller Selection

| Series | STM32F4 |
|-----------|---------------|
| Line | STM32F407/417 |
| MCU | STM32F407VGTx |
| Datasheet | DS8626_Rev8 |

1.2. Parameter Selection

| Temperature | 25 |
|-------------|-----|
| Vdd | 3.3 |

1.3. Battery Selection

| Battery | Li-SOCL2(A3400) |
|-------------------|-----------------|
| Capacity | 3400.0 mAh |
| Self Discharge | 0.08 %/month |
| Nominal Voltage | 3.6 V |
| Max Cont Current | 100.0 mA |
| Max Pulse Current | 200.0 mA |
| Cells in series | 1 |
| Cells in parallel | 1 |


1.4. Sequence

| Step | Step1 | Step2 |
|------------------------|-------------|---------------------------|
| Mode | RUN | STOP |
| Vdd | 3.3 | 3.3 |
| Voltage Source | Battery | Battery |
| Range | Scale1-High | No Scale |
| Fetch Type | FLASH | n/a |
| CPU Frequency | 168 MHz | 0 Hz |
| Clock Configuration | HSE PLL | Regulator LP Flash-PwrDwn |
| Clock Source Frequency | 4 MHz | 0 Hz |
| Peripherals | | |
| Additional Cons. | 0 mA | 0 mA |
| Average Current | 46 mA | 280 μΑ |
| Duration | 0.1 ms | 0.9 ms |
| DMIPS | 210.0 | 0.0 |
| Ta Max | 98.47 | 104.96 |
| Category | In DS Table | In DS Table |

1.5. Results

| Sequence Time | 1 ms | Average Current | 4.85 mA |
|---------------|------------------|-----------------|-------------|
| Battery Life | 29 days, 4 hours | Average DMIPS | 210.0 DMIPS |

1.6. Chart

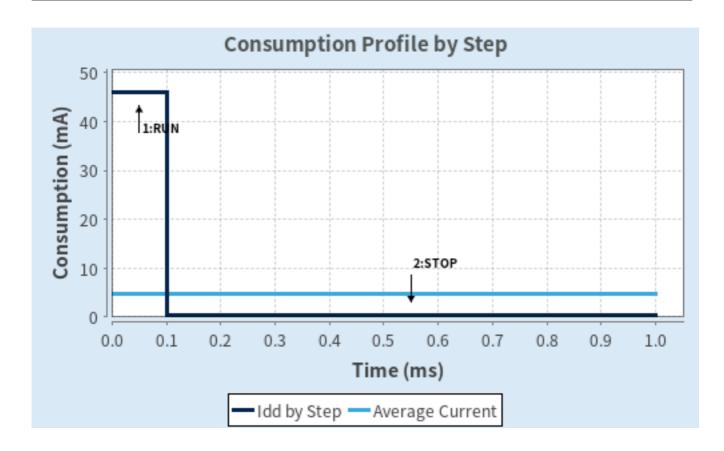

2. Peripherals and Middlewares Configuration

2.1. I2C1 I2C: I2C

2.1.1. Parameter Settings:

Master Features:

I2C Speed Mode Standard Mode

I2C Clock Speed (Hz) 100000

Slave Features:

Clock No Stretch Mode Disabled

Primary Address Length selection 7-bit

Dual Address Acknowledged Disabled

Primary slave address 0

General Call address detection Disabled

2.2. I2S3

Mode: Half-Duplex Master mode: Master Clock Output 2.2.1. Parameter Settings:

Generic Parameters:

Transmission Mode Mode Master Transmit

Communication Standard I2S Philips

Data and Frame Format 16 Bits Data on 16 Bits Frame

Selected Audio Frequency 96 KHz *

Real Audio Frequency 93.75 KHz *

Error between Selected and Real -2.34 % *

Clock Parameters:

Clock Source I2S PLL Clock

Clock Polarity Low

2.3. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator Low Speed Clock (LSE): Crystal/Ceramic Resonator

2.3.1. Parameter Settings:

System Parameters:

VDD voltage (V) 3.3
Instruction Cache Enabled
Prefetch Buffer Enabled
Data Cache Enabled

Flash Latency(WS) 5 WS (6 CPU cycle)

RCC Parameters:

HSI Calibration Value 16
HSE Startup Timout Value (ms) 100
LSE Startup Timout Value (ms) 5000

Power Parameters:

Power Regulator Voltage Scale Power Regulator Voltage Scale 1

2.4. SPI1

Mode: Full-Duplex Master

2.4.1. Parameter Settings:

Basic Parameters:

Frame Format Motorola
Data Size 8 Bits
First Bit MSB First

Clock Parameters:

Prescaler (for Baud Rate) 2

Baud Rate 42.0 MBits/s *

Clock Polarity (CPOL) Low
Clock Phase (CPHA) 1 Edge

Advanced Parameters:

CRC Calculation Disabled
NSS Signal Type Software

2.5. SYS

Debug: Serial Wire

Timebase Source: SysTick

2.6. USB_OTG_FS

Mode: Host_Only

mode: Activate_VBUS
2.6.1. Parameter Settings:

Speed Host Full Speed 12MBit/s

Signal start of frame Disabled

2.7. USB_HOST

Class for FS IP: Communication Host Class (Virtual Port Com)

2.7.1. Parameter Settings:

Host Configuration:

| USBH_MAX_NUM_ENDPOINTS (Maximum number of endpoints) | 2 |
|--|---------|
| USBH_MAX_NUM_INTERFACES (Maximun number of interfaces) | 2 |
| USBH_MAX_NUM_SUPPORTED_CLASS (Maximun number of supported class) | 1 |
| USBH_MAX_NUM_CONFIGURATION (Maximun number of supported configuration) | 1 |
| USBH_KEEP_CFG_DESCRIPTOR (Keep the configuration into RAM) | Enabled |
| USBH_MAX_SIZE_CONFIGURATION (Maximun size in bytes for the Configuration Descriptor) | 256 |
| USBH_MAX_DATA_BUFFER (Maximun size of temporary data) | 512 |

USBH_DEBUG_LEVEL (USBH Debug Level) 0: No debug message

CMSIS_RTOS:

USBH_USE_OS (Enable the support of an RTOS)

Disabled

2.7.2. Platform Settings:

Drive_VBUS_FS PC0

^{*} User modified value

3. System Configuration

3.1. GPIO configuration

| IP | Pin | Signal | GPIO mode | GPIO pull/up pull | Max | User Label |
|------------------|------------------------|---------------------|----------------------------------|-----------------------------|-------|-------------------------------------|
| | | | | down | Speed | |
| I2C1 | PB6 | I2C1_SCL | Alternate Function Open Drain | Pull-up * | Low | Audio_SCL [CS43L22_SCL] |
| | PB9 | I2C1_SDA | Alternate Function Open Drain | Pull-up * | Low | Audio_SDA [CS43L22_SDA] |
| 12S3 | PA4 | 12S3_WS | Alternate Function Push Pull | No pull-up and no pull-down | Low | I2S3_WS [CS43L22_LRCK] |
| | PC7 | I2S3_MCK | Alternate Function Push Pull | No pull-up and no pull-down | Low | I2S3_MCK [CS43L22_MCLK] |
| | PC10 | 12S3_CK | Alternate Function Push Pull | No pull-up and no pull-down | Low | 12S3_SCK [CS43L22_SCLK] |
| | PC12 | I2S3_SD | Alternate Function Push Pull | No pull-up and no pull-down | Low | 12S3_SD [CS43L22_SDIN] |
| RCC | PC14- OSC32_IN | RCC_OSC32_IN | n/a | n/a | n/a | PC14-OSC32_IN |
| | PC15- OSC32_OU T | RCC_OSC32_O UT | n/a | n/a | n/a | PC15-OSC32_OUT |
| | PH0- OSC_IN | RCC_OSC_IN | n/a | n/a | n/a | PH0-OSC_IN |
| | PH1- OSC_OUT | RCC_OSC_OUT | n/a | n/a | n/a | PH1-OSC_OUT |
| SPI1 | PA5 | SPI1_SCK | Alternate Function Push Pull | No pull-up and no pull-down | Low | SPI1_SCK [LIS302DL_SCL/SPC] |
| | PA6 | SPI1_MISO | Alternate Function Push Pull | No pull-up and no pull-down | Low | SPI1_MISO [LIS302DL_SDO] |
| | PA7 | SPI1_MOSI | Alternate Function Push Pull | No pull-up and no pull-down | Low | SPI1_MOSI [LIS302DL_SDA/SDI/SDO] |
| SYS | PA13 | SYS_JTMS- SWDIO | n/a | n/a | n/a | SWDIO |
| | PA14 | SYS_JTCK- SWCLK | n/a | n/a | n/a | SWCLK |
| USB_OTG_ FS | PA9 | USB_OTG_FS_ VBUS | Input mode | No pull-up and no pull-down | n/a | VBUS_FS |
| | PA11 | USB_OTG_FS_ DM | Alternate Function Push Pull | No pull-up and no pull-down | Low | OTG_FS_DM |
| | PA12 | USB_OTG_FS_ DP | Alternate Function Push Pull | No pull-up and no pull-down | Low | OTG_FS_DP |
| Single Mapped | PC3 | I2S2_SD | Alternate Function Push Pull | No pull-up and no pull-down | Low | PDM_OUT [MP45DT02_DOUT] |
| Signals | PB10 | 12S2_CK | Alternate Function Push Pull | No pull-up and no pull-down | Low | CLK_IN [MP45DT02_CLK] |
| | PA10 | USB_OTG_FS_I | Alternate Function Push Pull | No pull-up and no pull-down | Low | OTG_FS_ID |

| IP | Pin | Signal | GPIO mode | GPIO pull/up pull down | Max Speed | User Label |
|------|----------|------------------|--------------------------------------|-----------------------------|--------------|-------------------------------------|
| | | D | | | • | |
| | PB3 | SYS_JTDO- SWO | n/a | n/a | n/a | SWO |
| GPIO | PE3 | GPIO_Output | Output Push Pull | No pull-up and no pull-down | Low | CS_I2C/SPI [LIS302DL_CS_I2C/SPI] |
| | PC0 | GPIO_Output | Output Push Pull | No pull-up and no pull-down | Low | OTG_FS_PowerSwitchOn |
| | PA0-WKUP | GPIO_EXTI0 | External Event Mode | No pull-up and no pull-down | n/a | B1 [Blue PushButton] |
| | | | with Rising edge | | | |
| | | | trigger detection * | | | |
| | PB2 | GPIO_Input | Input mode | No pull-up and no pull-down | n/a | BOOT1 |
| | PD12 | GPIO_Output | Output Push Pull | No pull-up and no pull-down | Low | LD4 [Green Led] |
| | PD13 | GPIO_Output | Output Push Pull | No pull-up and no pull-down | Low | LD3 [Orange Led] |
| | PD14 | GPIO_Output | Output Push Pull | No pull-up and no pull-down | Low | LD5 [Red Led] |
| | PD15 | GPIO_Output | Output Push Pull | No pull-up and no pull-down | Low | LD6 [Blue Led] |
| | PD4 | GPIO_Output | Output Push Pull | No pull-up and no pull-down | Low | Audio_RST [CS43L22_RESET] |
| | PD5 | GPIO_Input | Input mode | No pull-up and no pull-down | n/a | OTG_FS_OverCurrent |
| | PE1 | GPIO_EXTI1 | External Event Mode with Rising edge | No pull-up and no pull-down | n/a | MEMS_INT2 [LIS302DL_INT2] |
| | | | trigger detection * | | | |

3.2. DMA configuration

nothing configured in DMA service

3.3. NVIC configuration

3.3.1. NVIC

| Interrupt Table | Enable | Preenmption Priority | SubPriority | |
|---|--------|----------------------|-------------|--|
| Non maskable interrupt | true | 0 | 0 | |
| Hard fault interrupt | true | 0 | 0 | |
| Memory management fault | true | 0 | 0 | |
| Pre-fetch fault, memory access fault | true | 0 | 0 | |
| Undefined instruction or illegal state | true | 0 | 0 | |
| System service call via SWI instruction | true | 0 | 0 | |
| Debug monitor | true | 0 | 0 | |
| Pendable request for system service | true | 0 | 0 | |
| System tick timer | true | 0 | 0 | |
| USB On The Go FS global interrupt | true | 0 | 0 | |
| PVD interrupt through EXTI line 16 | unused | | | |
| Flash global interrupt | | unused | | |
| RCC global interrupt | unused | | | |
| I2C1 event interrupt | | unused | | |
| I2C1 error interrupt | unused | | | |
| SPI1 global interrupt | | unused | | |
| SPI3 global interrupt | | unused | | |
| FPU global interrupt | unused | | | |

3.3.2. NVIC Code generation

| Enabled interrupt Table | Select for init sequence ordering | Generate IRQ handler | Call HAL handler |
|---|-----------------------------------|-------------------------|------------------|
| Non maskable interrupt | false | true | false |
| Hard fault interrupt | false | true | false |
| Memory management fault | false | true | false |
| Pre-fetch fault, memory access fault | false | true | false |
| Undefined instruction or illegal state | false | true | false |
| System service call via SWI instruction | false | true | false |
| Debug monitor | false | true | false |
| Pendable request for system service | false | true | false |
| System tick timer | false | true | true |
| USB On The Go FS global interrupt | false | true | true |

* User modified value

4. System Views

4.1. Category view

4.1.1. Current

5. Docs & Resources

Type Link

BSDL files https://www.st.com/resource/en/bsdl_model/stm32f405-415_407-

417_bsdl.zip

IBIS models https://www.st.com/resource/en/ibis_model/stm32f405-415_407-

417_ibis.zip

System View https://www.st.com/resource/en/svd/stm32f4_svd.zip

Description

Presentations https://www.st.com/resource/en/product_presentation/stm32-

stm8_embedded_software_solutions.pdf

Presentations https://www.st.com/resource/en/product_presentation/stm32_eval-

tools_portfolio.pdf

Presentations https://www.st.com/resource/en/product_presentation/stm32_stm8_functi

onal-safety-packages.pdf

Presentations https://www.st.com/resource/en/product_presentation/stm32-

stm8_software_development_tools.pdf

Brochures https://www.st.com/resource/en/brochure/products-and-solutions-for-plcs-

and-smart-i-os.pdf

Flyers https://www.st.com/resource/en/flyer/flstm32nucleo.pdf

Flyers https://www.st.com/resource/en/flyer/flstmcsuite.pdf

Flyers https://www.st.com/resource/en/flyer/flstm32trust.pdf

Product https://www.st.com/resource/en/certification_document/stm32_authenticat

Certifications ion_can.pdf

Application Notes https://www.st.com/resource/en/application_note/an1181-electrostatic-

discharge-sensitivity-measurement-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application note/an1709-emc-design-

guide-for-stm8-stm32-and-legacy-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2606-stm32-

microcontroller-system-memory-boot-mode-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2639-soldering-

recommendations-and-package-information-for-leadfree-ecopack-mcus-

- and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an2834-how-to-get-the-best-adc-accuracy-in-stm32-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an2867-oscillator-design-guide-for-stm8afals-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an2945-stm8s-and-stm32-mcus-a-consistent-832bit-product-line-for-painless-migration-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3070-managing-the-driver-enable-signal-for-rs485-and-iolink-communications-with-the-stm32s-usart-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3126-audio-and-waveform-generation-using-the-dac-in-stm32-products-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3154-can-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3155-usart-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3156-usb-dfu-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3364-migration-and-compatibility-guidelines-for-stm32-microcontroller-applications-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3371-using-the-hardware-realtime-clock-rtc-in-stm32-f0-f2-f3-f4-and-l1-series-of-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3997-audio-playback-and-recording-using-the-stm32f4discovery-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3998-pdm-audio-software-decoding-on-stm32-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4013-stm32-crossseries-timer-overview-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4031-using-the-

- stm32f2-stm32f4-and-stm32f7-series-dma-controller-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4073-how-to-improve-adc-accuracy-when-using-stm32f2xx-and-stm32f4xx-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4076-two-or-three-shunt-resistor-based-current-sensing-circuit-design-in-3phase-inverters-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4221-i2c-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4229-how-to-implement-a-vocoder-solution-using-stm32-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4277-using-stm32-device-pwm-shutdown-features-for-motor-control-and-digital-power-conversion-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4286-spi-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4488-getting-started-with-stm32f4xxxx-mcu-hardware-development-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4547-migrating-from-stm32f407xx417xx-to-stm32f427xx429xx437xx439xx-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4566-extending-the-dac-performance-of-stm32-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4640-peripherals-interconnections-on-stm32f4057xx-stm32f4157xx-stm32f42xxx-stm32f43xxx-stm32f446xx-and-stm32f469479xx-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4655-virtually-increasing-the-number-of-serial-communication-peripherals-in-stm32-applications-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4739-stm32cube-firmware-examples-for-stm32f4-series-stmicroelectronics.pdf

- Application Notes https://www.st.com/resource/en/application_note/an4750-handling-of-soft-errors-in-stm32-applications-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4759-using-the-hardware-realtime-clock-rtc-and-the-tamper-management-unit-tamp-with-stm32-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4776-generalpurpose-timer-cookbook-for-stm32-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4803-highspeed-si-simulations-using-ibis-and-boardlevel-simulations-using-hyperlynx-si-on-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4821-migrating-from-stm32f405415-line-and-stm32f407417-line-to-stm32l4-series-and-stm32l4-series-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4850-stm32-mcusspreadspectrum-clock-generation-principles-properties-andimplementation-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4908-stm32-usart-automatic-baud-rate-detection-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4989-stm32-microcontroller-debug-toolbox-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4995-using-anelectromyogram-technique-to-detect-muscle-activitystmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5020-digital-camera-interface-dcmi-on-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5027-interfacing-pdm-digital-microphones-using-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5036-thermal-management-guidelines-for-stm32-applications-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5073-receiving-spdif-audio-stream-with-the-stm32f4f7h7-series-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5225-usb-typec-power-delivery-using-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5543-enhancedmethods-to-handle-spi-communication-on-stm32-devicesstmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4899-stm32microcontroller-gpio-hardware-settings-and-lowpower-consumptionstmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5612-esd-protection-of-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5156-introduction-to-stm32-microcontrollers-security-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4838-introduction-to-memory-protection-unit-management-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4230-random-number-generation-validation-using-nist-statistical-test-suite-for-stm32-microcontrollers-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4879-introduction-to-usb-hardware-and-pcb-guidelines-using-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an1202_freertos_guidefor related Tools freertos-guide-stmicroelectronics.pdf & Software

Application Notes https://www.st.com/resource/en/application_note/an1602_semihosting_in for related Tools __truestudio-how-to-do-semihosting-in-truestudio-stmicroelectronics.pdf & Software

Application Notes https://www.st.com/resource/en/application_note/an1801_stm32cubeprog for related Tools rammer_in_truestudio-installing-stm32cubeprogrammer-in-truestudio-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/atollic_editing_keyboard for related Tools _shortcuts-atollic-editing-keyboard-shortcuts-stmicroelectronics.pdf & Software

Application Notes https://www.st.com/resource/en/application_note/stm32cubemx_installatio

for related Tools n_in_truestudio-stm32cubemx-installation-in-truestudio-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2656-stm32f10xxx-

for related Tools Icd-glass-driver-firmware-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an2790-tft-lcd-

for related Tools interfacing-with-the-highdensity-stm32f10xxx-fsmc-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an3078-stm32-for related Tools inapplication-programming-over-the-ic-bus-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an3116-stm32s-adc-

for related Tools modes-and-their-applications-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an3174-implementing-

for related Tools receivers-for-infrared-remote-control-protocols-using-stm32f10xxx-

& Software microcontrollers-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3241-qvga-tftlcd-

for related Tools direct-drive-using-the-stm32f10xx-fsmc-peripheral-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an3307-guidelines-for-

for related Tools obtaining-iec-60335-class-b-certification-for-any-stm32-application-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3364-migration-and-

for related Tools compatibility-guidelines-for-stm32-microcontroller-applications-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3965-

for related Tools stm32f40xstm32f41x-inapplication-programming-using-the-usart-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3966-lwip-tcpip-stack-

for related Tools demonstration-for-stm32f4x7-microcontrollers-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an3968-

for related Tools stm32f407stm32f417-inapplication-programming-iap-over-ethernet-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3969-eeprom-

for related Tools emulation-in-stm32f40xstm32f41x-microcontrollers-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an3988-clock-for related Tools configuration-tool-for-stm32f40xx41xx427x437x-microcontrollers-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3990-upgrading-for related Tools stm32f4discovery-board-firmware-using-a-usb-key-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an3997-audio-playback-

for related Tools and-recording-using-the-stm32f4discovery-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an3998-pdm-audio-for related Tools software-decoding-on-stm32-microcontrollers-stmicroelectronics.pdf & Software

Application Notes https://www.st.com/resource/en/application_note/an4044-floating-point-for related Tools unit-demonstration-on-stm32-microcontrollers-stmicroelectronics.pdf & Software

Application Notes https://www.st.com/resource/en/application_note/an4323-getting-started-for related Tools with-stemwin-library-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4365-using-stm32f4-for related Tools mcu-power-modes-with-best-dynamic-efficiency-stmicroelectronics.pdf & Software

Application Notes https://www.st.com/resource/en/application_note/an4435-guidelines-for-for related Tools obtaining-ulcsaiec-607301603351-class-b-certification-in-any-stm32-application-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4457-implementing-for related Tools an-emulated-uart-on-stm32f4-microcontrollers-stmicroelectronics.pdf & Software

Application Notes https://www.st.com/resource/en/application_note/an4499-stm32--for related Tools nrf51822-bluetooth-low-energy-system-solution-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4657-stm32-for related Tools inapplication-programming-iap-using-the-usart-stmicroelectronics.pdf & Software

Application Notes https://www.st.com/resource/en/application_note/an4666-parallel-for related Tools synchronous-transmission-using-gpio-and-dma-stmicroelectronics.pdf & Software

Application Notes https://www.st.com/resource/en/application_note/an4678-full-duplex-spifor related Tools emulation-for-stm32f4-microcontrollers-stmicroelectronics.pdf & Software

Application Notes https://www.st.com/resource/en/application_note/an4701-proprietary-for related Tools code-readout-protection-on-microcontrollers-of-the-stm32f4-series-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4739-stm32cube-

for related Tools firmware-examples-for-stm32f4-series-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4758-proprietary-for related Tools code-readout-protection-on-stm32l4-stm32l4-stm32g4-and-stm32wb-

& Software series-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4759-using-the-

for related Tools hardware-realtime-clock-rtc-and-the-tamper-management-unit-tamp-with-

& Software stm32-microcontrollers-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4841-digital-signal-for related Tools processing-for-stm32-microcontrollers-using-cmsis-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4968-proprietary-for related Tools code-read-out-protection-pcrop-on-stm32f72xxx-and-stm32f73xxx-

& Software microcontrollers-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5054-secure-for related Tools programming-using-stm32cubeprogrammer-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an5056-integration-

for related Tools guide-for-the-xcubesbsfu-stm32cube-expansion-package-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5360-getting-started-

for related Tools with-projects-based-on-the-stm32mp1-series-in-stm32cubeide-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5361-getting-started-

for related Tools with-projects-based-on-dualcore-stm32h7-microcontrollers-in-

& Software stm32cubeide-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5394-getting-started-

for related Tools with-projects-based-on-the-stm32l5-series-in-stm32cubeide-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5418-how-to-build-a-for related Tools simple-usbpd-sink-application-with-stm32cubemx-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an5426-migrating-

for related Tools graphics-middleware-projects-from-stm32cubemx-540-to-stm32cubemx-

& Software 550-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5464-position-control-

for related Tools of-a-threephase-permanent-magnet-motor-using-xcubemcsdk-or-

& Software xcubemcsdkful-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5564-getting-started-

for related Tools with-projects-based-on-dualcore-stm32wl-microcontrollers-in-

& Software stm32cubeide-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5698-adapting-the-for related Tools xcubestl-functional-safety-package-for-stm32-iec-61508-compliant-to-

& Software other-safety-standards-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5731-stm32cubemx-

for related Tools and-stm32cubeide-threadsafe-solution-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4502-stm32-

for related Tools smbuspmbus-expansion-package-for-stm32cube-stmicroelectronics.pdf

& Software

Errata Sheets https://www.st.com/resource/en/errata_sheet/es0182-stm32f405407xx-

and-stm32f415417xx-device-errata-stmicroelectronics.pdf

Datasheet https://www.st.com/resource/en/datasheet/dm00037051.pdf

Programming https://www.st.com/resource/en/programming_manual/pm0214-stm32-

Manuals cortexm4-mcus-and-mpus-programming-manual-stmicroelectronics.pdf

Reference https://www.st.com/resource/en/reference_manual/rm0090-

Manuals stm32f405415-stm32f407417-stm32f427437-and-stm32f429439-

advanced-armbased-32bit-mcus-stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical_note/tn0516-overview-of-the-

& Articles stm32f0xf100xxf103xx-and-stm32f2xxf30xf4xx-mcus-pmsm-singledual-

foc-sdk-v40-stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical_note/tn1163-description-of-

& Articles wlcsp-for-microcontrollers-and-recommendations-for-its-use-

stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical_note/tn1204-tape-and-reel-

& Articles shipping-media-for-stm32-microcontrollers-in-bga-packages-

stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical_note/tn1205-tape-and-reel-

& Articles shipping-media-for-stm8-and-stm32-microcontrollers-in-fpn-packages-

stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical_note/tn1206-tape-and-reel-

& Articles shipping-media-for-stm8-and-stm32-microcontrollers-in-qfp-packages-

stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical_note/tn1207-tape-and-reel-

& Articles shipping-media-for-stm8-and-stm32-microcontrollers-in-so-packages-

stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical note/tn1208-tape-and-reel-

& Articles shipping-media-for-stm8-and-stm32-microcontrollers-in-tssop-and-ssop-

packages-stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical_note/tn1433-reference-device-

& Articles marking-schematics-for-stm32-microcontrollers-and-microprocessors-

stmicroelectronics.pdf