

## SPECIFICATION

Current Rate:3 AMP

Insulation Resistance:1000M  $\Omega$  Min.

Contact Resistance:20m  $\Omega$  Max.

Dielectric Voltage:1000V AC for one minute

Operation Temperature:-40°C to +105°C

Standart height (H) = 2.5

## MATERIAL

Insulator:Polyester,UL 94V-0


Standard:PBT or Nylon 6T

Contact Pin:Copper Alloy

Contact Plating:Gold Flash all over

## PLS-xx

Pin Header 2.54mm 1 Row H=1.5/1.7/2.5mm Straight Type

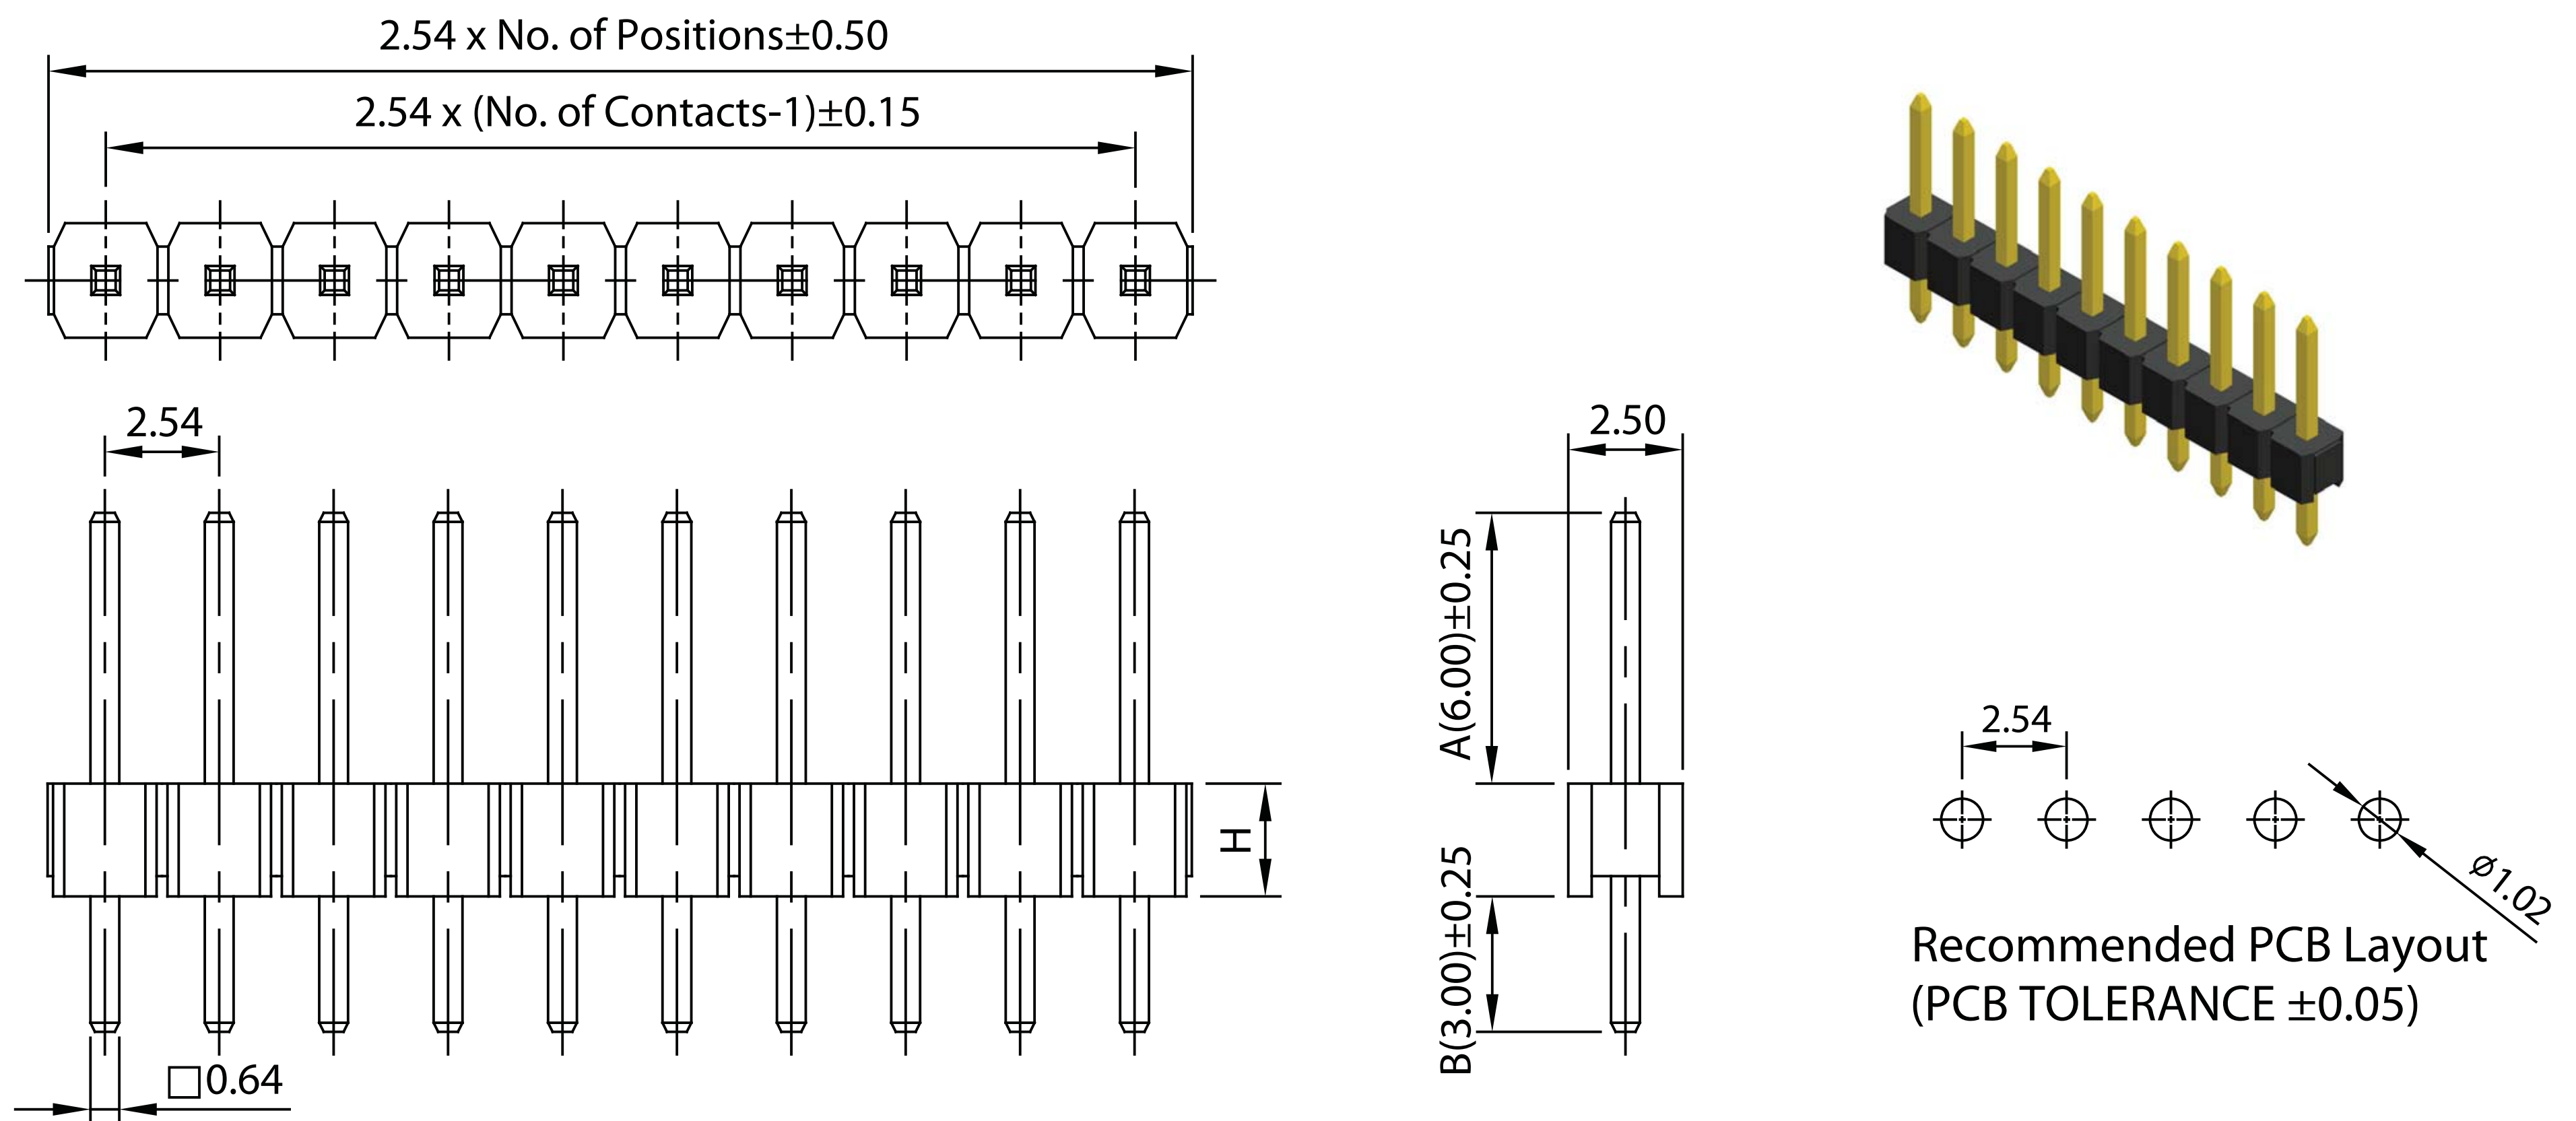

## PLD-xx

Pin Header 2.54mm 2 Row H=1.5/1.7/2.5mm Straight Type

