
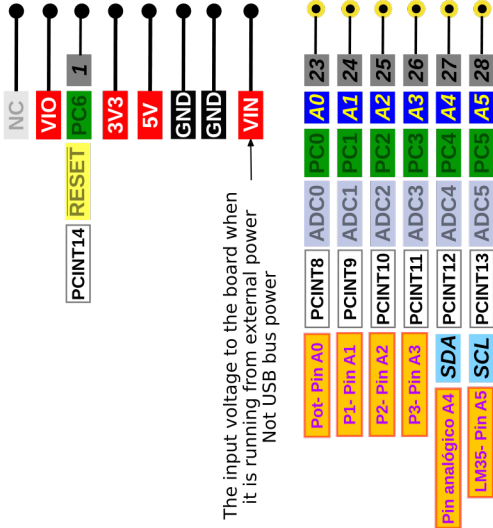


Legend	
■	Power
■	GND
■	Serial Pin
■	Analog Pin
■	Pin Change Interrupt
■	Control
■	Physical Pin
■	Program Reference Pin
■	Port Pin
■	Pin function
■	Interrupt Pin
~	PWM Pin
●	Port Power
■	BIOS Shield pin use

SDA (Datos) y SCL (Clock). Conector I2C, IIC o TWI (Two Wire Interface)

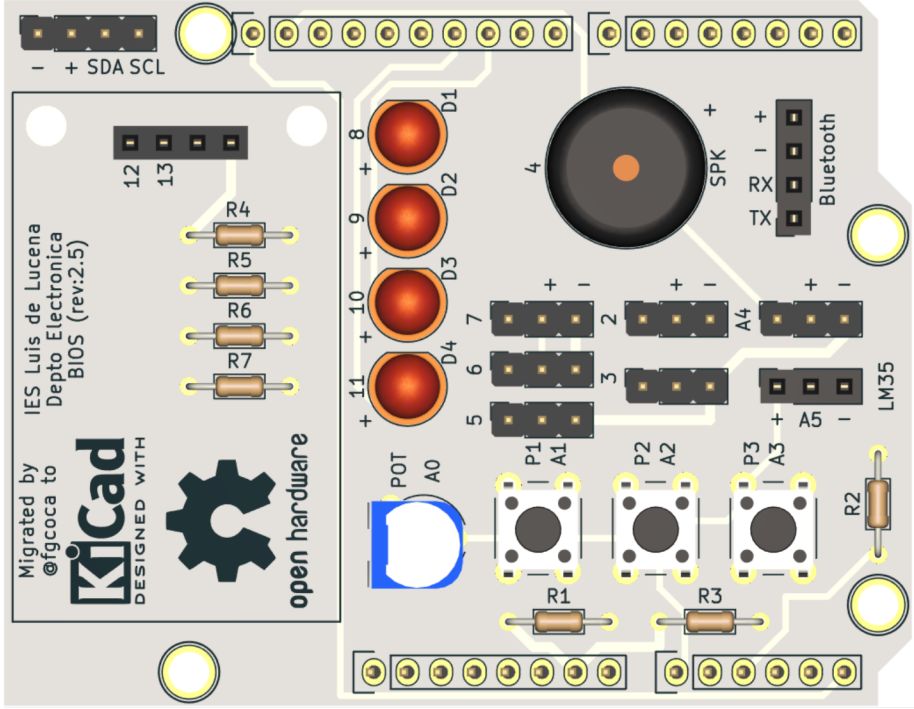

The input voltage to the board when it is running from external power Not USB bus power

Connected to the ATmega and used for USB program and communicating with it

PINOUT

BIOS Shield migration		
Federico Coca		rev1.0
Size: A4	Inkscape 0.92	