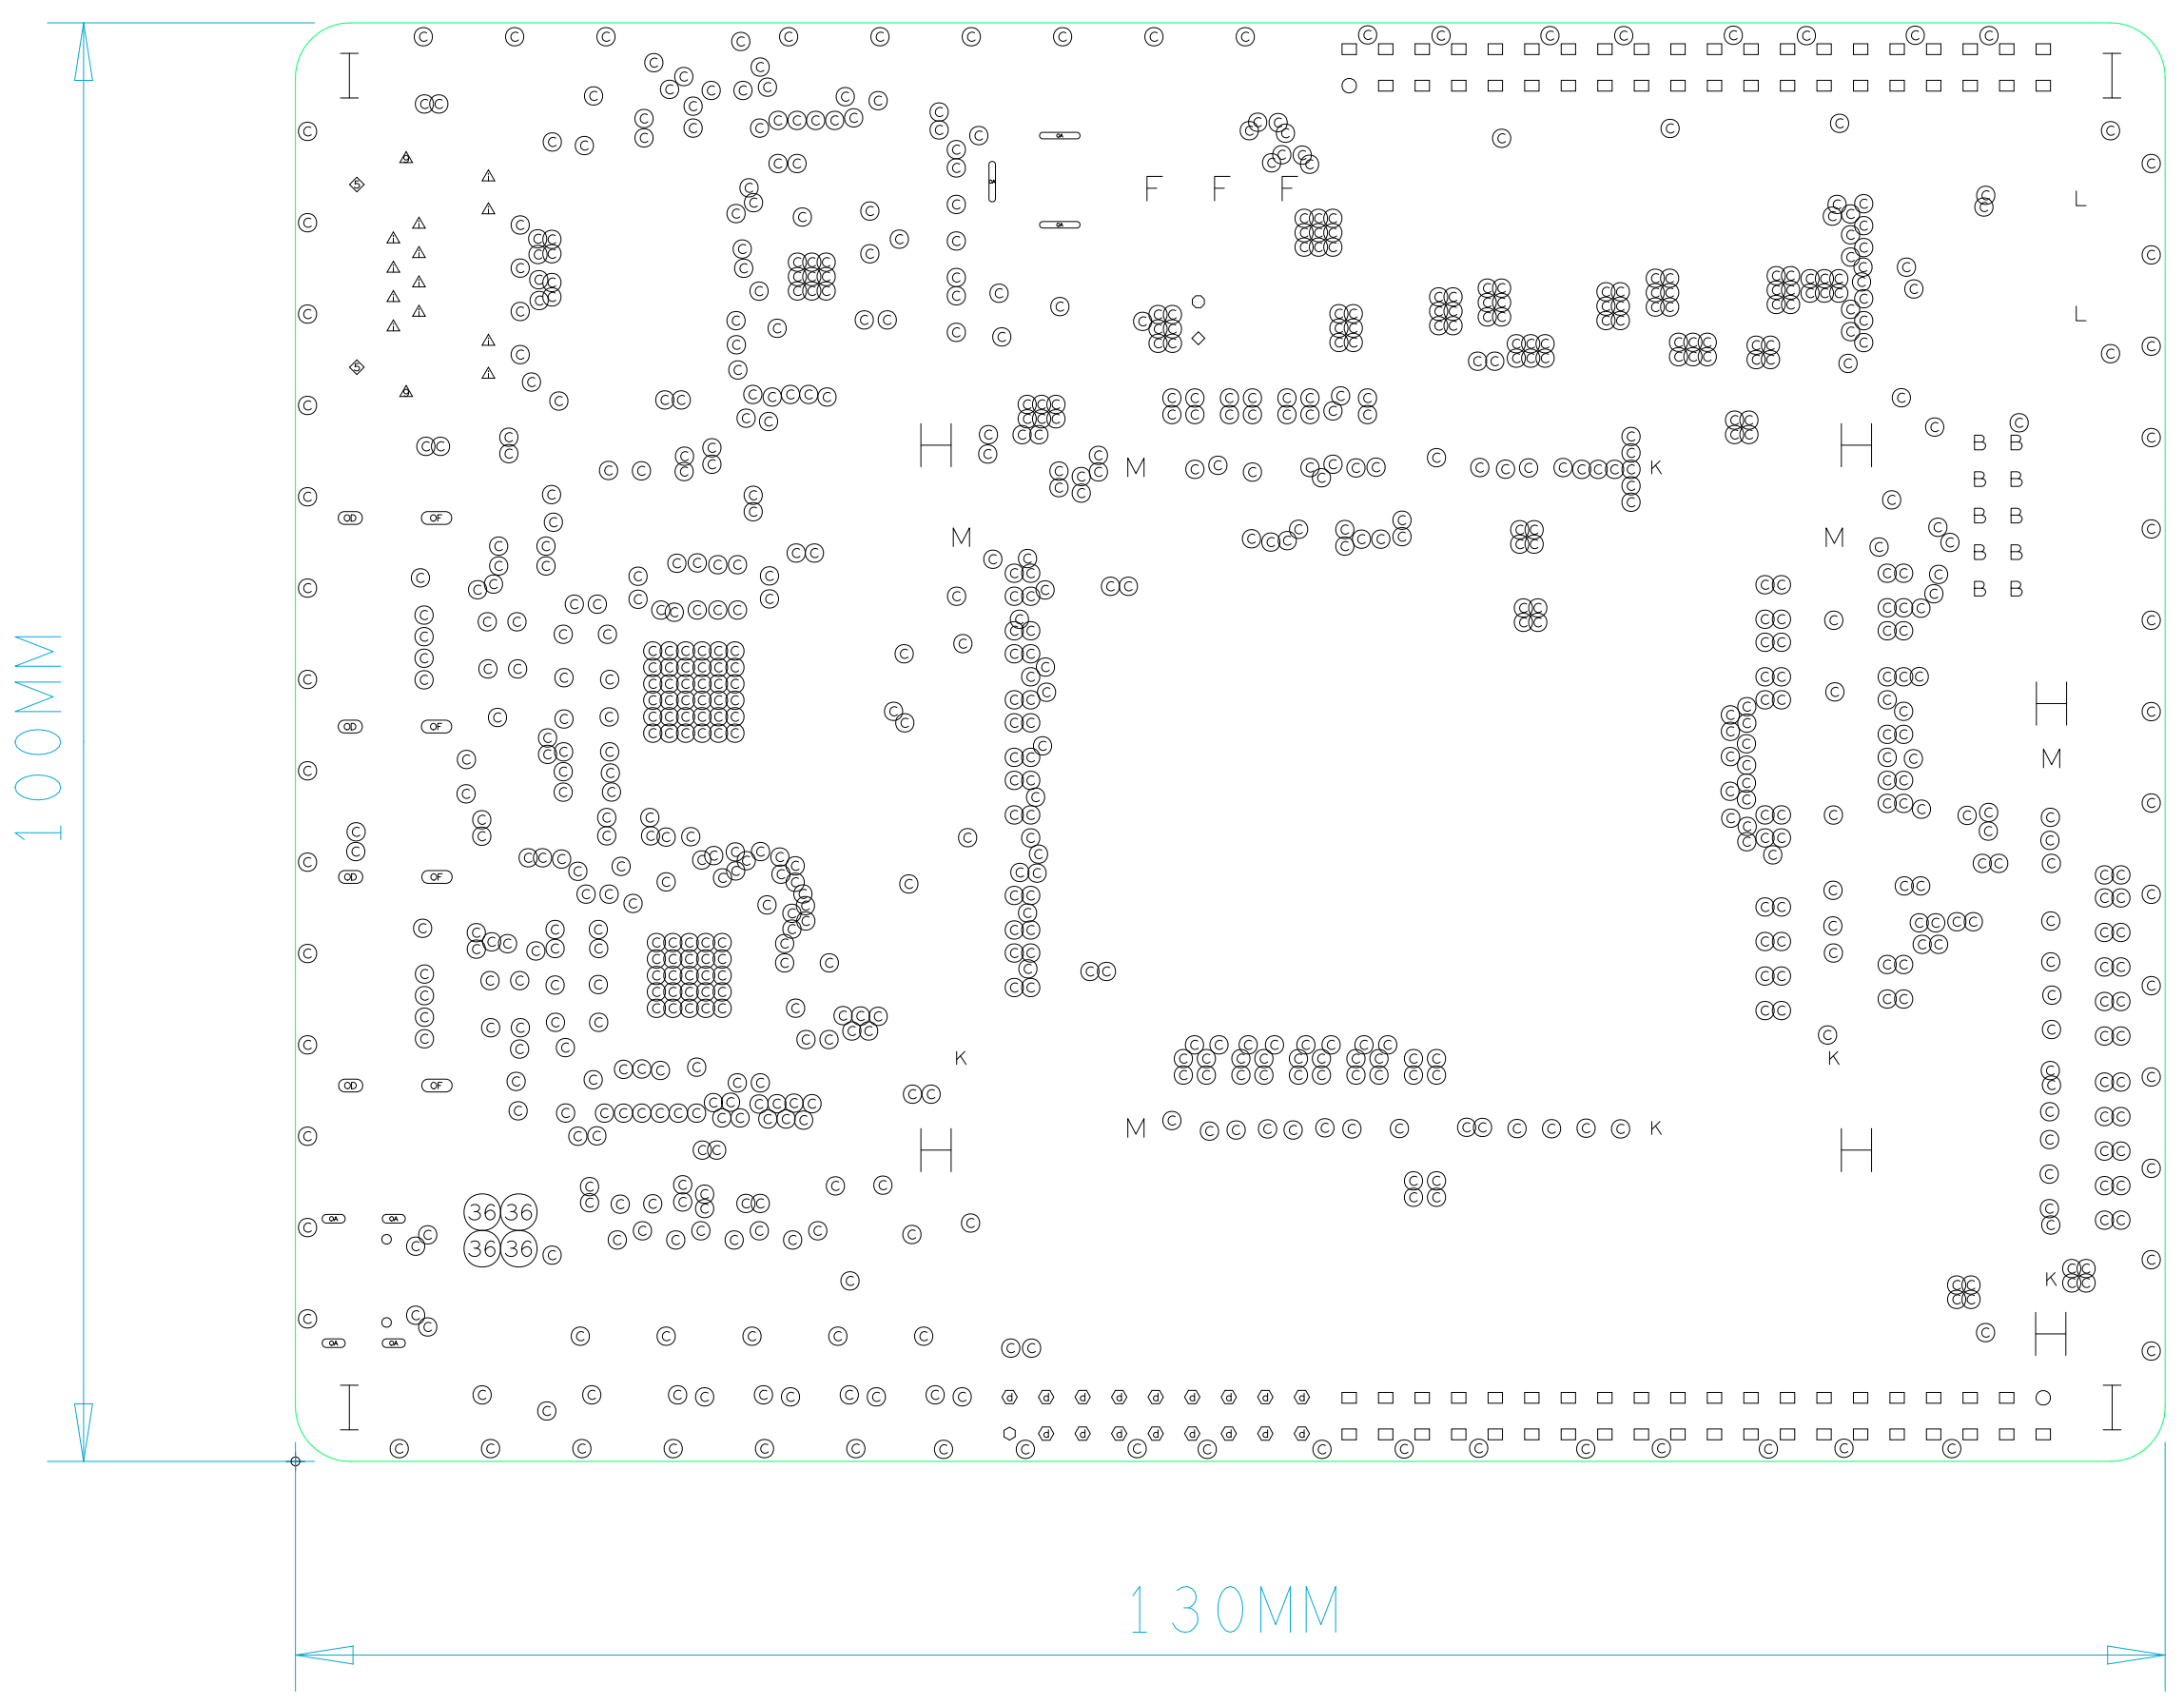

DRILL CHART: TOP to BOTTOM						
ALL UNITS ARE IN MILLIMETERS						
FIGURE	FINISHED_SIZE	ROTATION	TOLERANCE_DRILL	TOLERANCE_TRAVEL	PLATED	QTY
©	0.3048	-	+0.0/-0.0	-	PLATED	842
△	0.889	-	+0.0/-0.0	-	PLATED	12
○	0.899922	-	+0.0/-0.0	-	PLATED	1
◇	0.899922	-	+0.0/-0.0	-	PLATED	1
ⓓ	0.899922	-	+0.0/-0.0	-	PLATED	17
⬡	0.899922	-	+0.0/-0.0	-	PLATED	1
㊱	0.9144	-	+0.0/-0.0	-	PLATED	4
○	0.999998	-	+0.0/-0.0	-	PLATED	2
□	0.999998	-	+0.0/-0.0	-	PLATED	78
B	1.016	-	+0.0/-0.0	-	PLATED	10
△	1.5748	-	+0.0/-0.0	-	PLATED	2
F	1.700022	-	+0.0/-0.0	-	PLATED	3
H	2.999994	-	+0.0/-0.0	-	PLATED	6
I	3.10007	-	+0.0/-0.0	-	PLATED	4
○	0.659892	-	+0.0/-0.0	-	NON-PLATED	2
K	0.899922	-	+0.0/-0.0	-	NON-PLATED	5
L	1.016	-	+0.0/-0.0	-	NON-PLATED	2
M	1.299972	-	+0.0/-0.0	-	NON-PLATED	5
◇5	3.2512	-	+0.0/-0.0	-	NON-PLATED	2
(OA)	1.599946x0.599948	0.000	+0.050038/-0.050038	+0.050038/-0.050038	PLATED	4
(OD)	1.6764x0.889	0.000	+0.0762/-0.0762	+0.0762/-0.0762	PLATED	4
(OF)	2.1082x0.889	0.000	+0.0762/-0.0762	+0.0762/-0.0762	PLATED	4
(9A)	2.810002x0.450088	0.000	+0.0/-0.0	+0.0/-0.0	PLATED	2
(9A)	2.810002x0.450088	90.000	+0.0/-0.0	+0.0/-0.0	PLATED	1

Purchase Order & Specification Sheet

Dielectric Material:	FR4	Board Thickness(MM):	1.3	Layers:	4
Surface Finished:	☐ Hasl	☐ Flash Gold	■ Immersion Gold	☐ Gold Finger	☐ Osp
	☐ Hasl Lead Free	☐ Immersion Tin	☐ Immersion Silver	☐ Other	
Finger Chamfer:	☐ Yes Angle	☐ 20	☐ 30	☐ 45	■ No
Soldermask Colours:	■ Green	☐ Blue	☐ Matte Green	☐ Other	
Silk Screen Colours:	■ White	☐ Yellow	☐ Black	☐ Other	
Spell Mode:		Open Windows:	None		
Outline Profile:	■ Router	☐ Bridge	☐ V-cut	☐ Stamp Hole	
Inspectionstandard:	☐ IPCII	☐ IPCIII	■ Gjb362B-2009	☐ Other	
Compare With IPC File:	☐ Yes	■ No			
Company Logo:	☐ Required	☐ Specified Position	☐ Only Date Code	■ Not Appear	
Via Technic:	■ All via (<=0.5mm) must be filled(except open soldermask via)			☐ By gerber	
(unit:mil)MIN.track : 4	MIN.spacing : 4	MIN.hole: 8			
Bow and Twist Tolerance:<=0.75%	Pressfit holes: The tolerance of is+/-0.05mm				

Other Notes:

1.STACKING (dielectric thickness can be adjusted beween +/-2mil,but don,t less than 3.5mil; if inspection is Gjb362A than don,t less than 4mil.)

2.Control Impedance (track width can be adjusted +/-0.5mil , but don,t less than 4mil.)

3.If etch layer don't have above impedance track pls ignore.

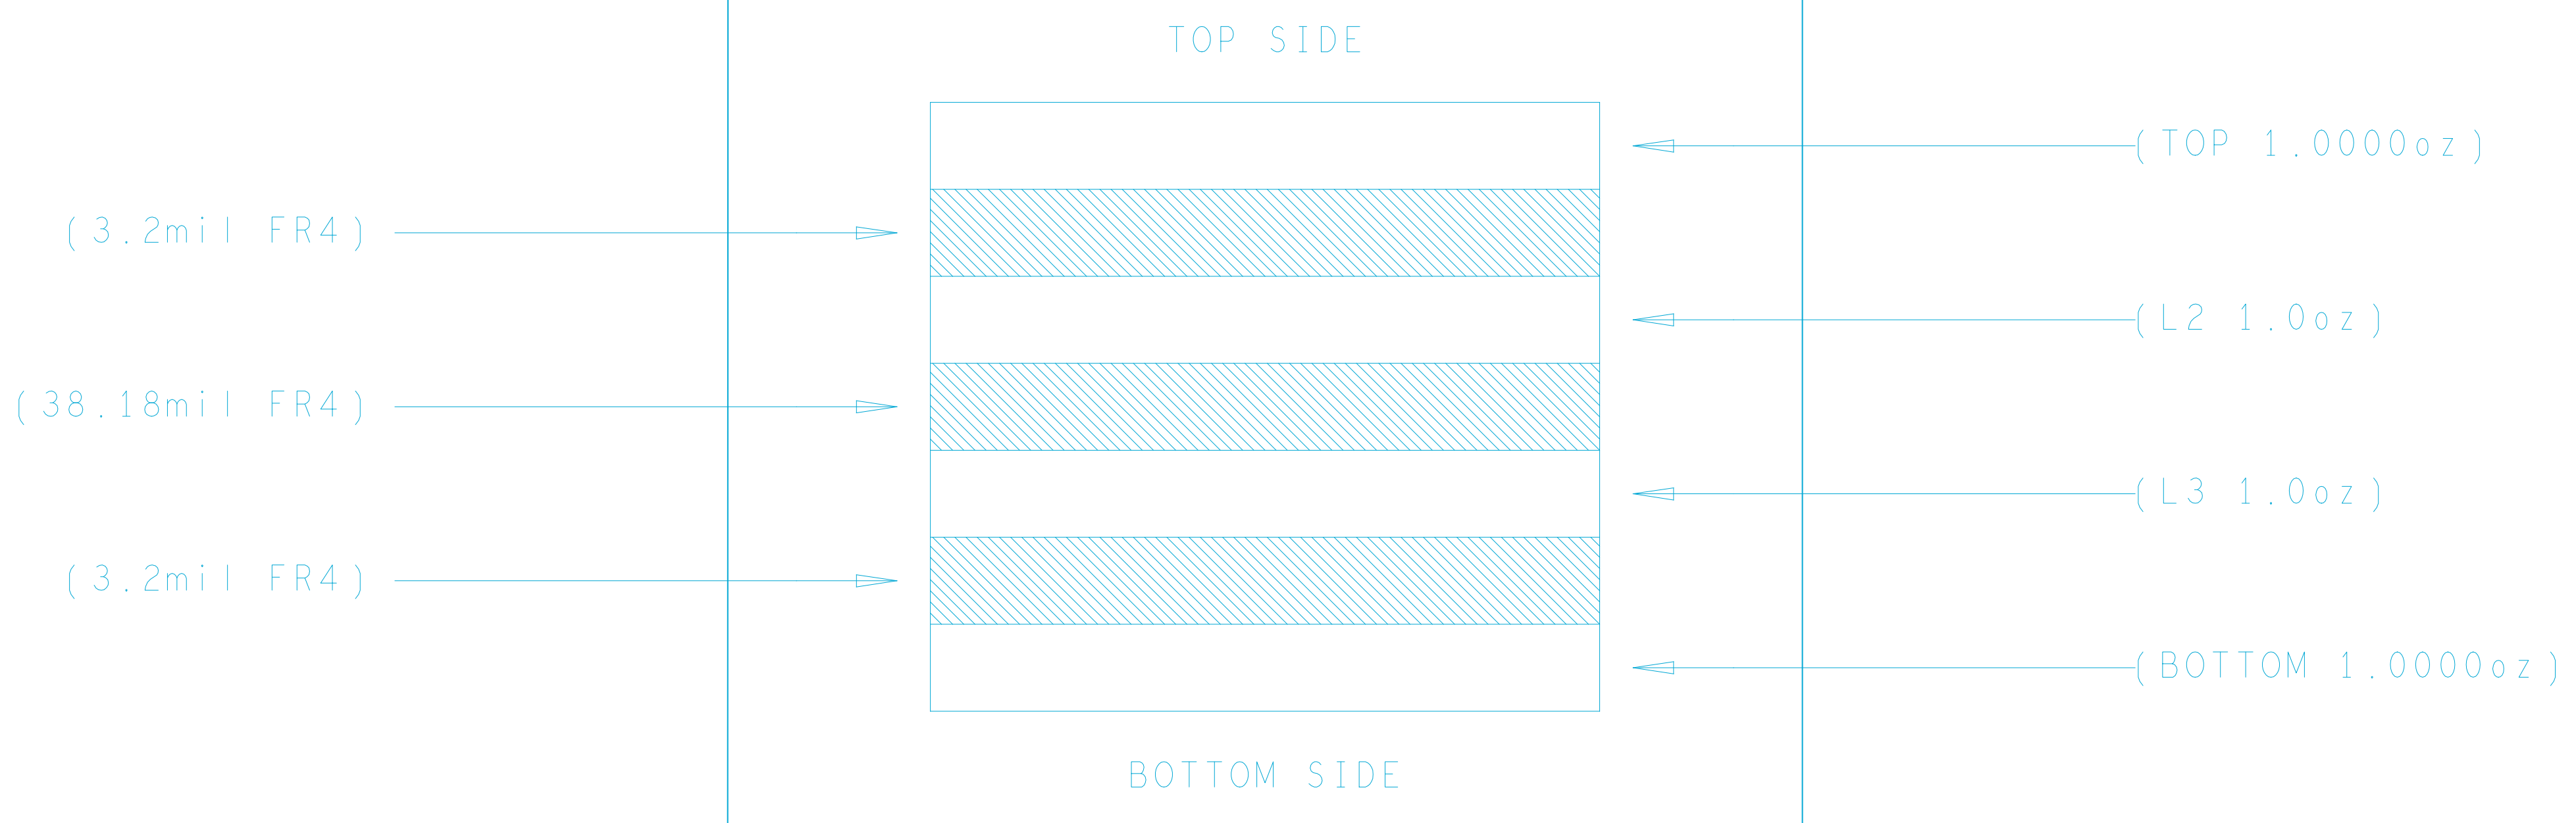

SINGLE TRACE IMPEDANCE CONTROL

LAYER	WTDTH (mil)	IMPEDANCE (ohm)	PRECISION	REF LAYER
L1/L2/L3/L4	5	50	+/- 10%	L2;L1/L3;L2/L4;L3

DIFFERENTIAL TRACE IMPEDANCE CONTROL

LAYER	WTDTH (mil)	IMPEDANCE (ohm)	PRECISION	REF LAYER
L1/L2/L3/L4	4.7/6	90	+/- 10%	L2;L1/L3;L2/L4;L3
L1/L2/L3/L4	4.1/7.5	100	+/- 10%	L2;L1/L3;L2/L4;L3

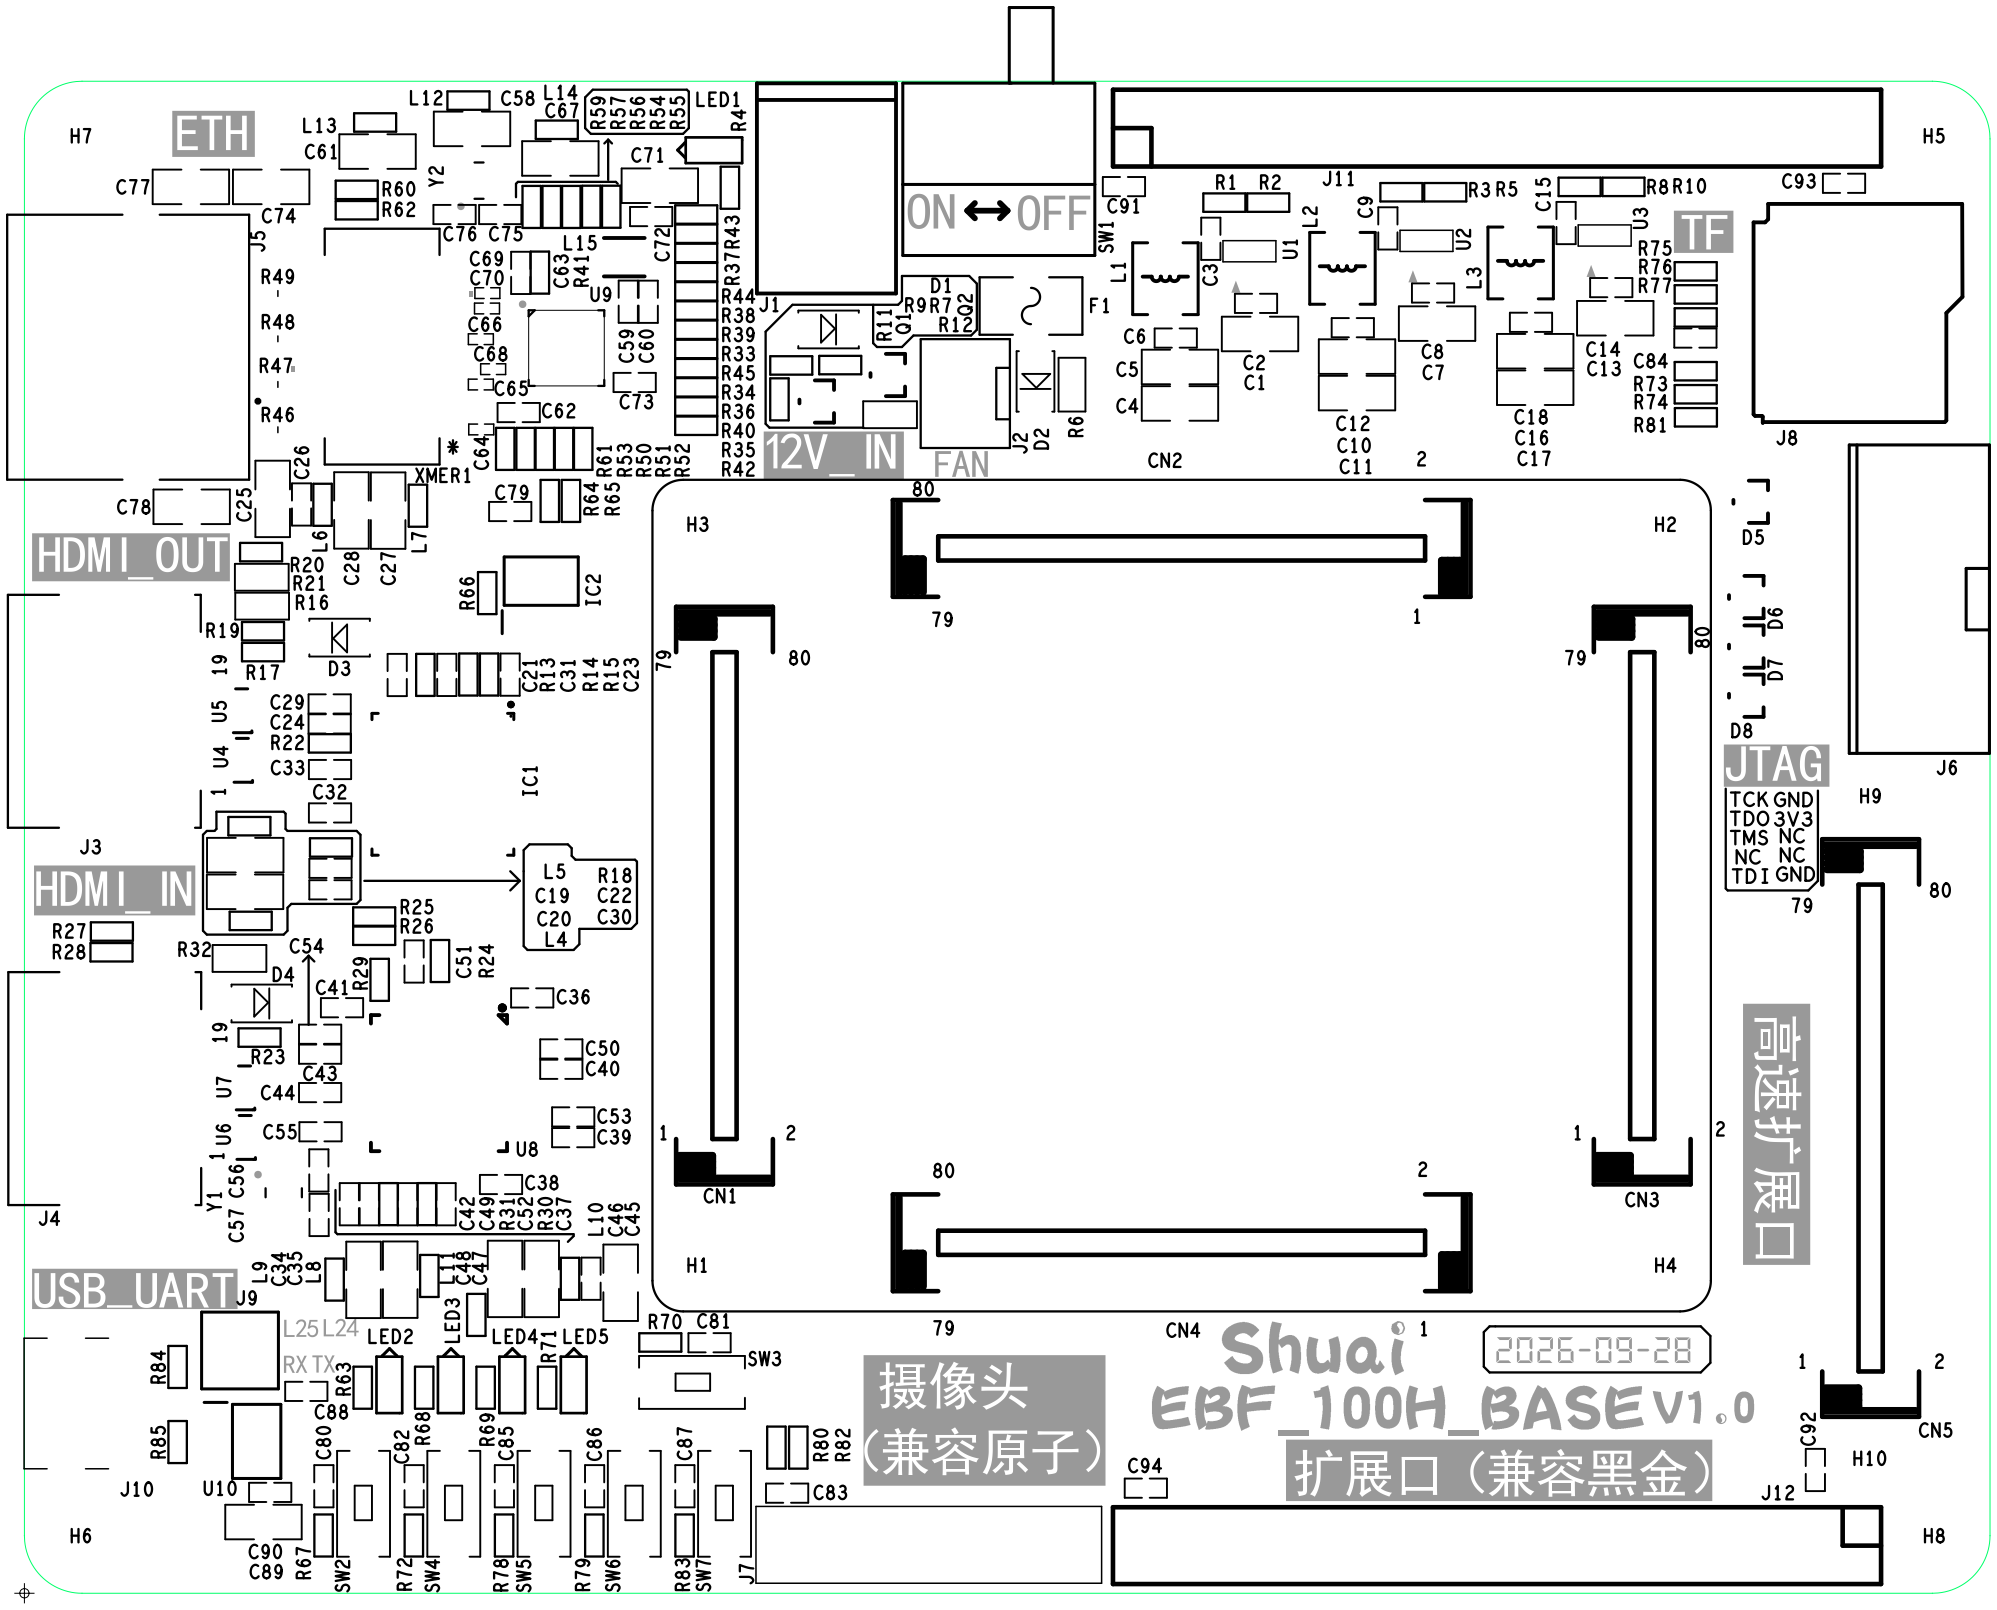
ETH
HDMI_OUT
HDMI_IN
USB_UART
12V_IN
FAN
ON ⟷ OFF
TF
JTAG
TCK GND
TDO 3V3
TMS NC
NC NC
TDI GND
高速扩展口
摄像头
(兼容原子)
扩展口（兼容黑金）
Shuai
EBF_100H_BASE V1.0
2026-09-28
H1
H2
H3
H4
H5
H6
H7
H8
H9
H10
J1
J2
J3
J4
J5
J6
J7
J8
J9
J10
J11
J12
CN1
CN2
CN3
CN4
CN5
IC1
IC2
U1
U2
U3
U4
U5
U6
U7
U8
U9
U10
SW1
SW2
SW3
SW4
SW5
SW6
SW7
LED1
LED2
LED3
LED4
LED5
D1
D2
D3
D4
D5
D6
D7
D8
Q1
Q2
F1
Y1
Y2
XMER1
L1
L2
L3
L4
L5
L6
L7
L8
L9
L10
L12
L13
L14
L15
L24
L25
RX TX
1
2
79
80

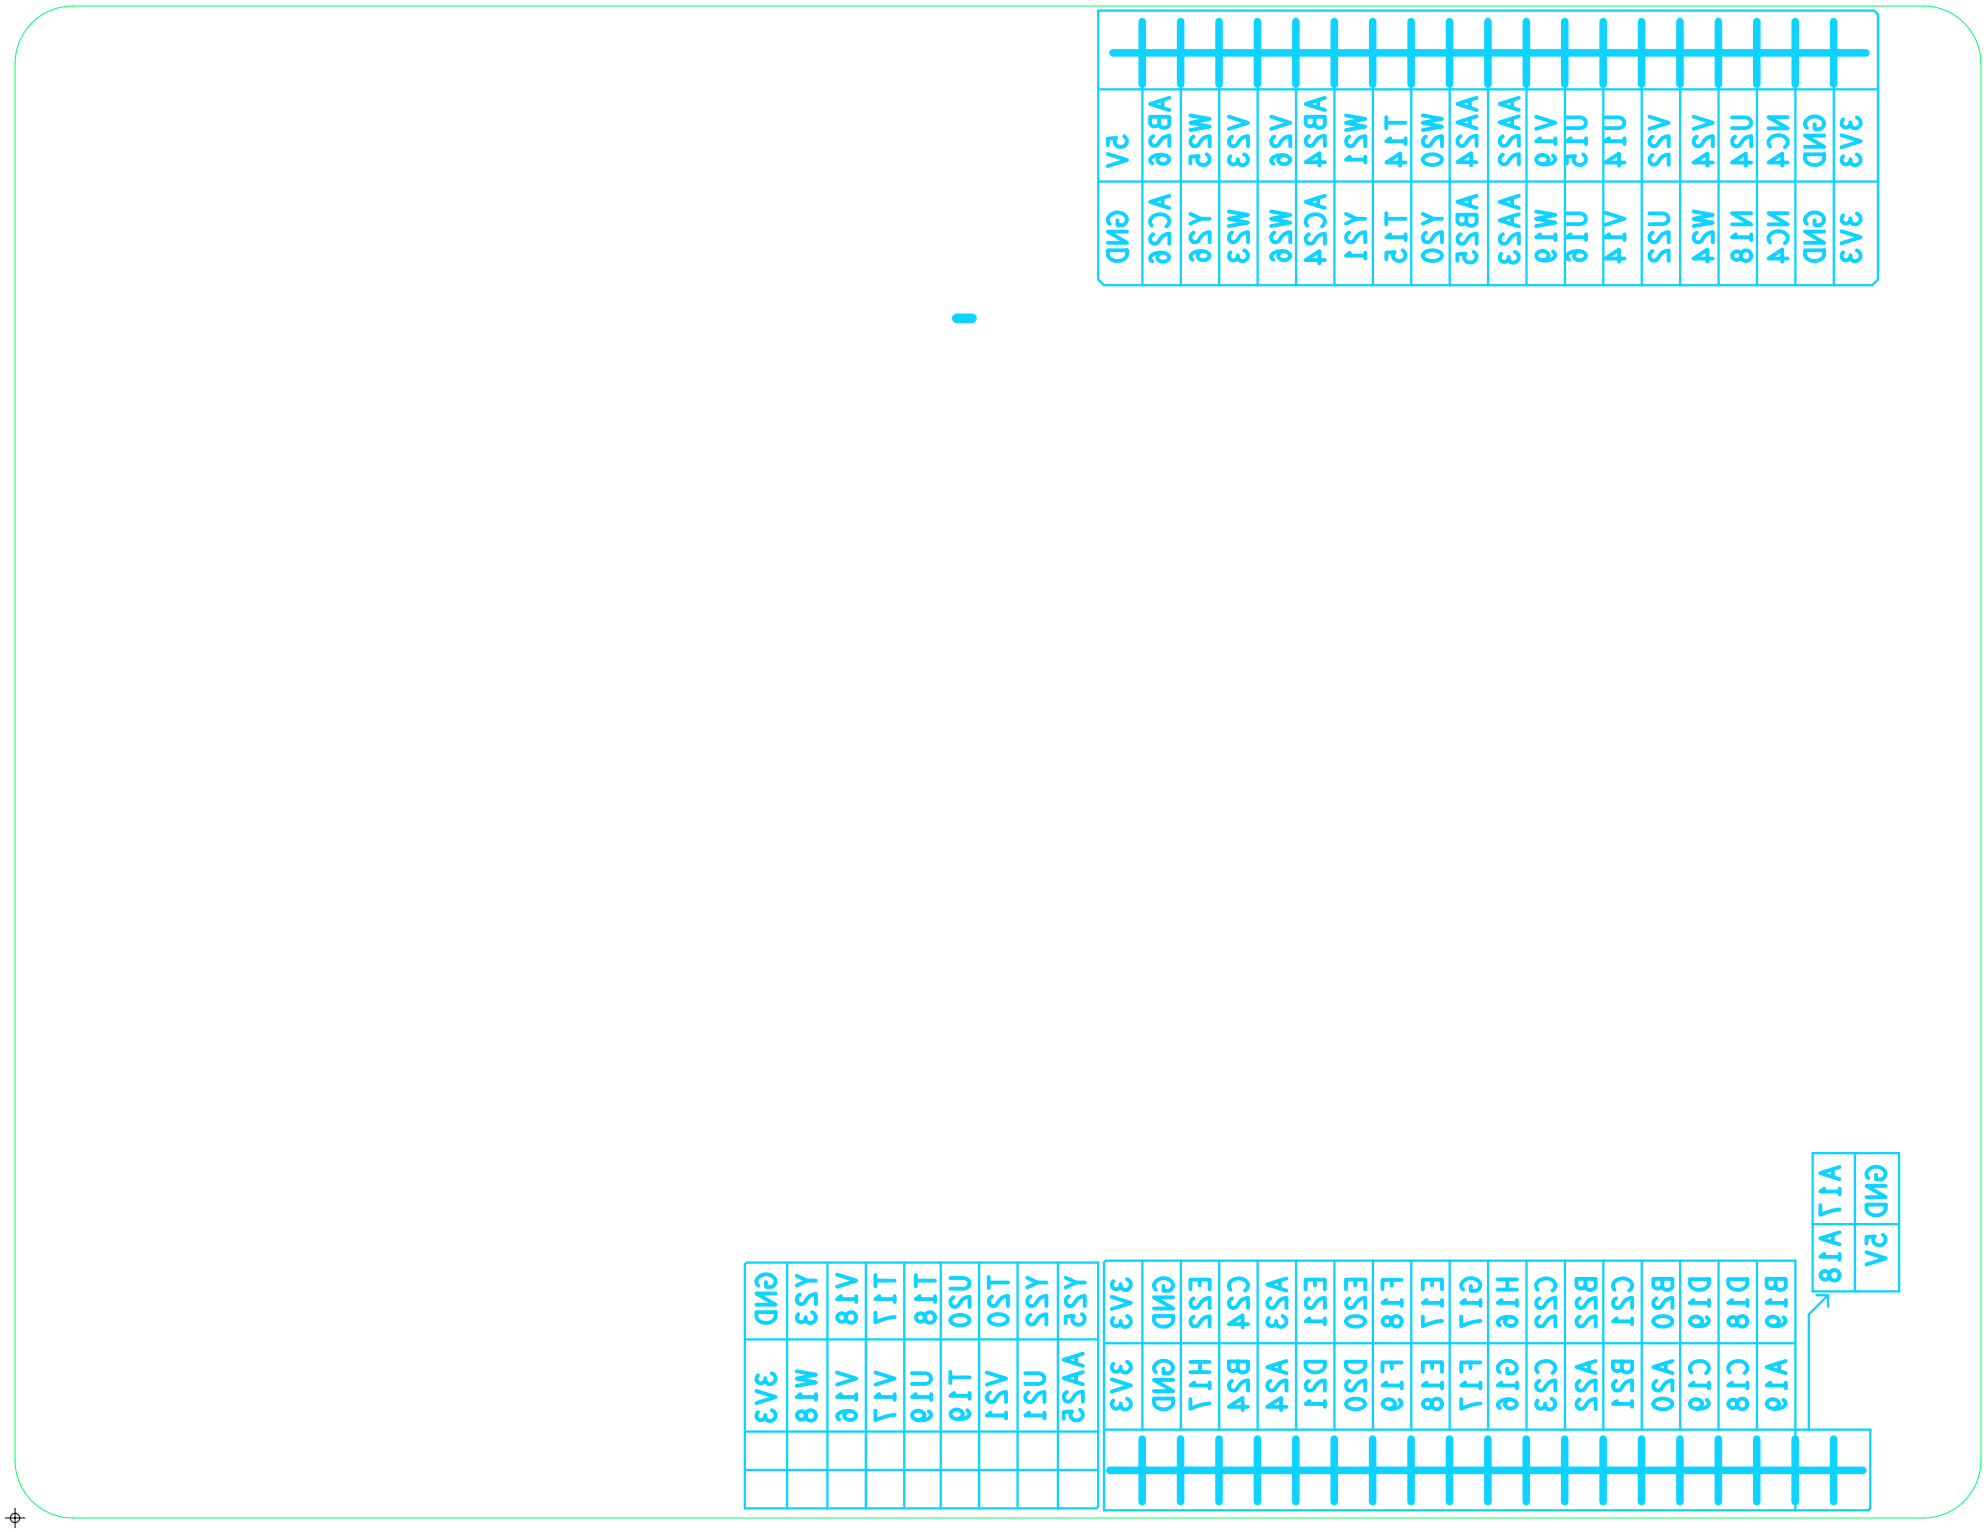
5V
AB26
W25
V23
V26
AB24
W21
T14
W20
AA24
AA22
V19
U15
U14
V22
V24
U24
NC4
GND
3V3
GND
AC26
Y26
W23
W26
AC24
Y21
T15
Y20
AB25
AA23
W19
U16
V14
U22
W24
N18
NC4
GND
3V3
GND
Y23
V18
T17
T18
U20
T20
Y22
Y25
3V3
W18
V16
V17
U19
T19
V21
U21
AA25
3V3
GND
E22
C24
A23
E21
E20
F18
E17
G17
H16
C22
B22
C21
B20
D16
D18
B16
3V3
GND
H17
B24
A24
D21
D20
F19
E18
F17
G16
C23
A22
B21
A20
C16
C18
A16
A17
GND
A18
5V

ART FILM – ASSEMBLY_TOP

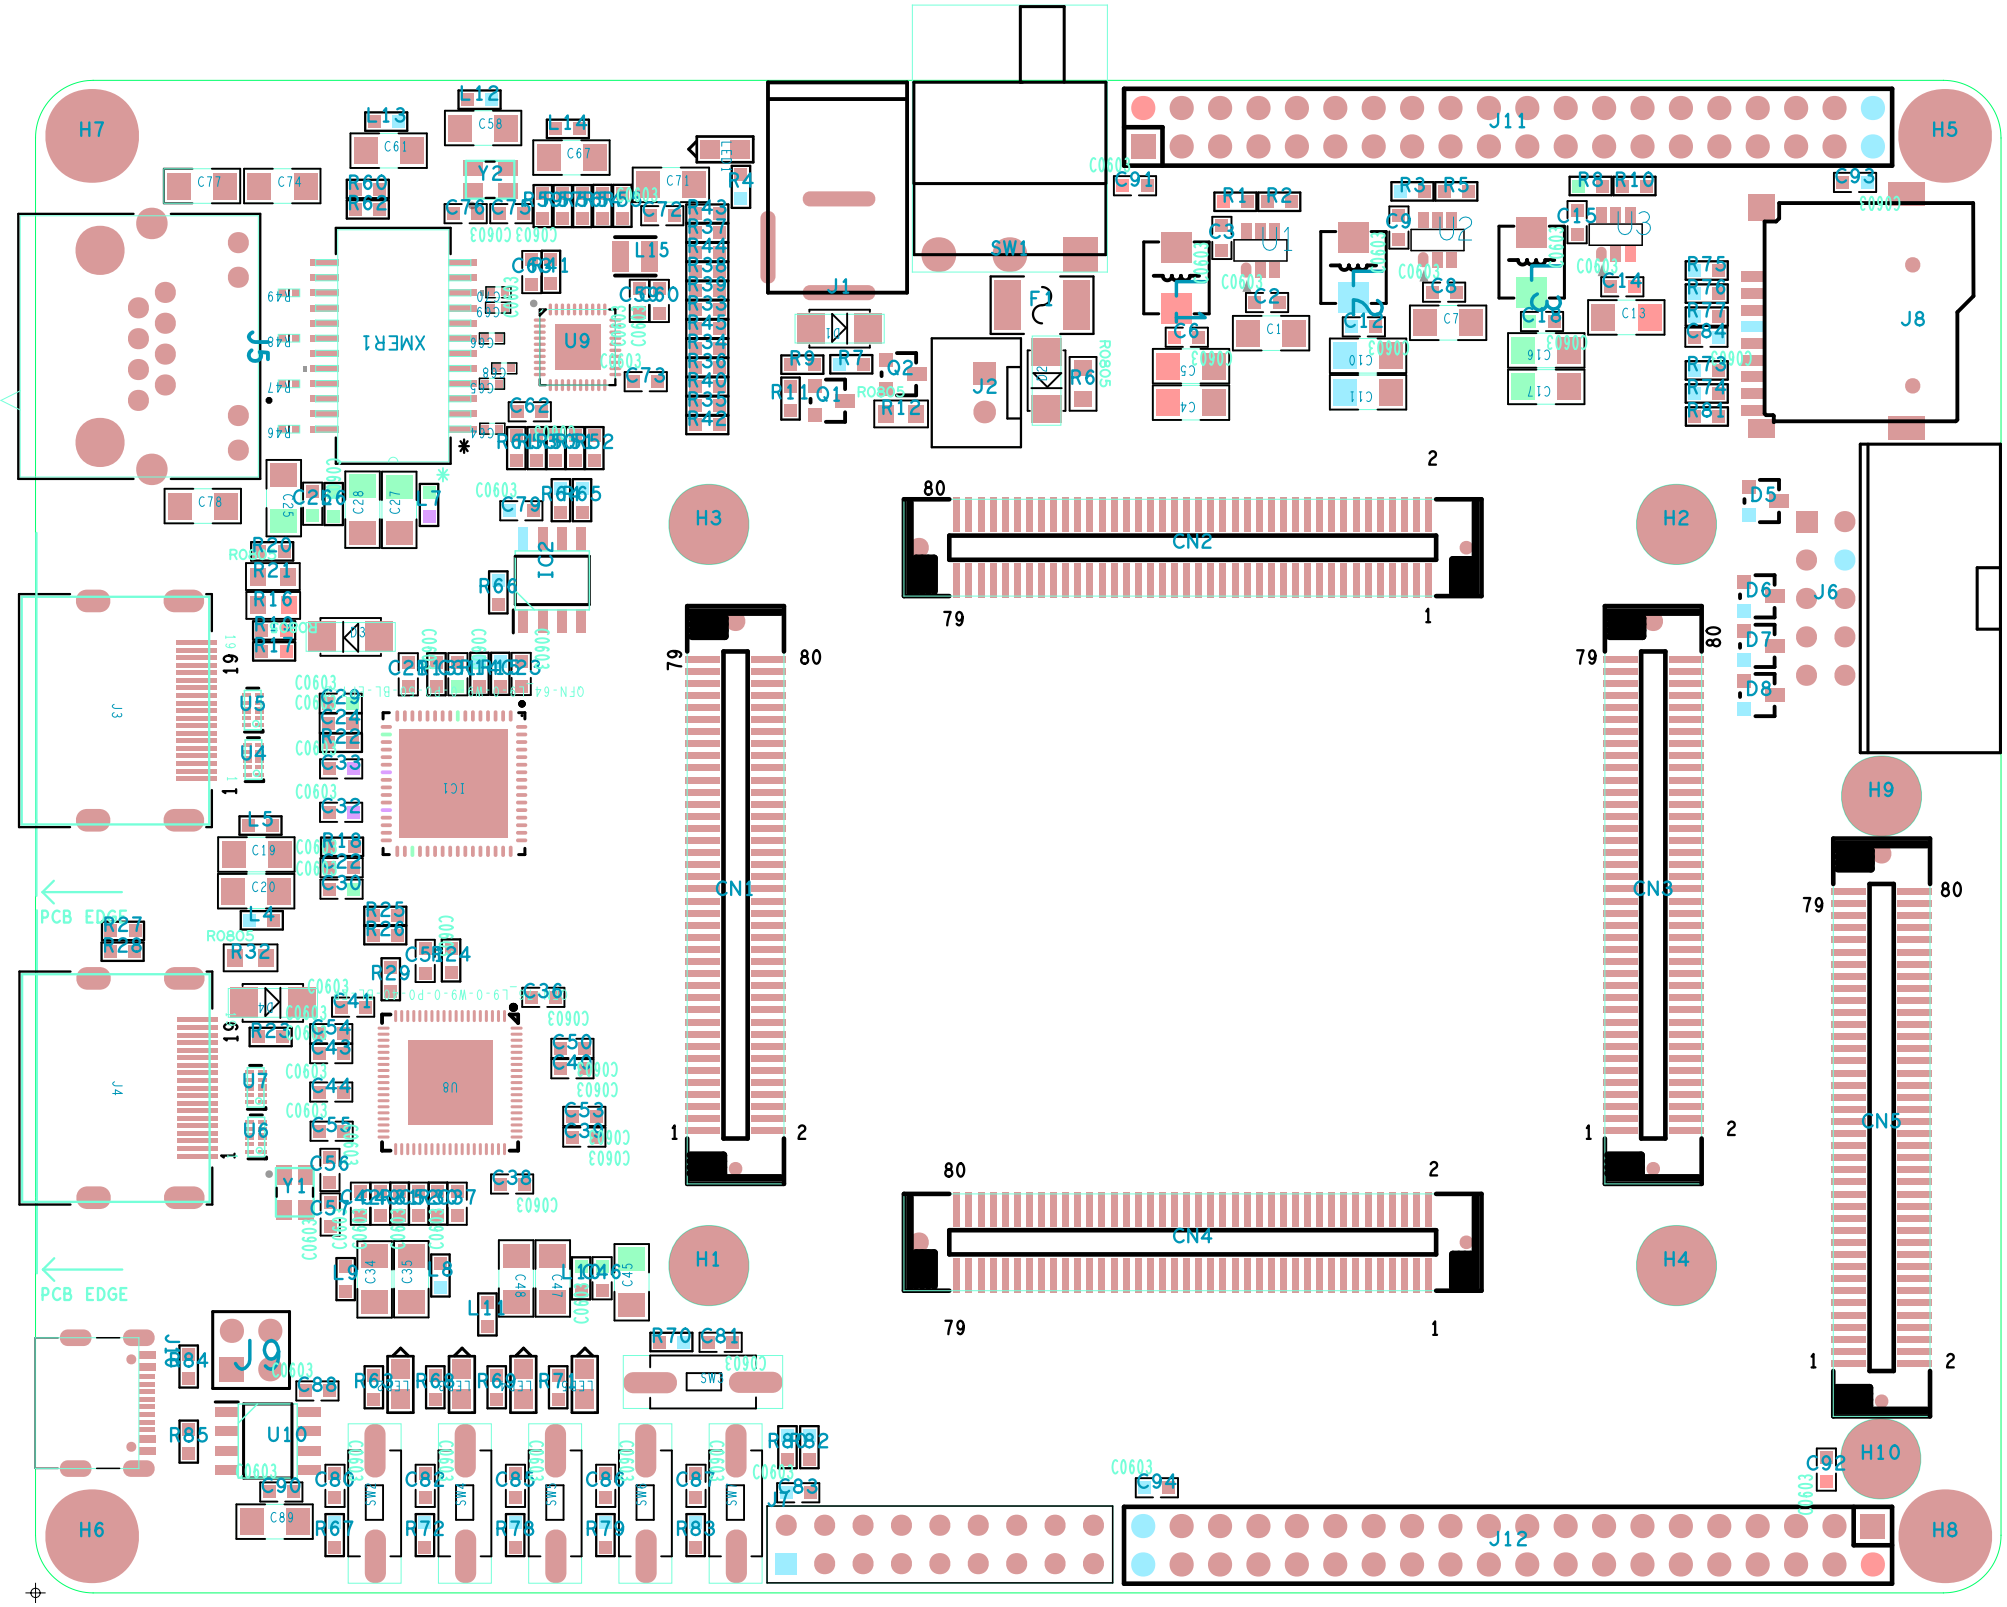
H7
H5
J11
L13
L12
L14
C77
C74
R60
R62
Y2
C76
C75
C72
R43
R37
R44
R38
R39
R40
R42
R4
J1
SW1
F1
C91
R1
R2
R3
R5
R8
R10
C93
C3
U1
C9
U2
C15
U3
L1
L2
L3
C2
C6
C8
C12
C13
C14
C18
C16
C17
C10
C11
C5
C4
C1
C7
R75
R76
R77
C84
R73
R74
R81
J8
J5
XMER1
U9
C64
C41
C50
C60
C73
C62
R9
R7
Q2
R11
Q1
R12
J2
R6
C78
C26
C28
C27
L7
C79
R64
R65
IC2
R66
H3
CN2
80
79
2
1
H2
D5
D6
J6
D7
D8
R20
R21
R16
R15
R17
J3
19
1
U5
U4
C29
C24
R22
C33
C32
IC1
CN1
CN3
L5
C19
C20
R18
R19
C30
L4
PCB EDGE
R27
R28
R32
R25
R26
C58
R24
R29
C36
C41
R23
C54
C43
J4
U7
C44
U6
C55
U8
C59
C47
C53
C39
C56
Y1
C57
C38
H9
CN5
80
79
2
1
H1
CN4
H4
L9
L8
L11
L10
C34
C35
C48
C42
C45
PCB EDGE
J10
R84
J9
C88
R63
R68
R69
R71
R70
C81
SW3
R85
U10
C90
C89
R80
R82
C80
C82
C85
C86
C87
C83
R67
R72
R78
R79
R83
C94
C92
H10
J12
H6
H8

ART FILM – ASSEMBLY_TOP

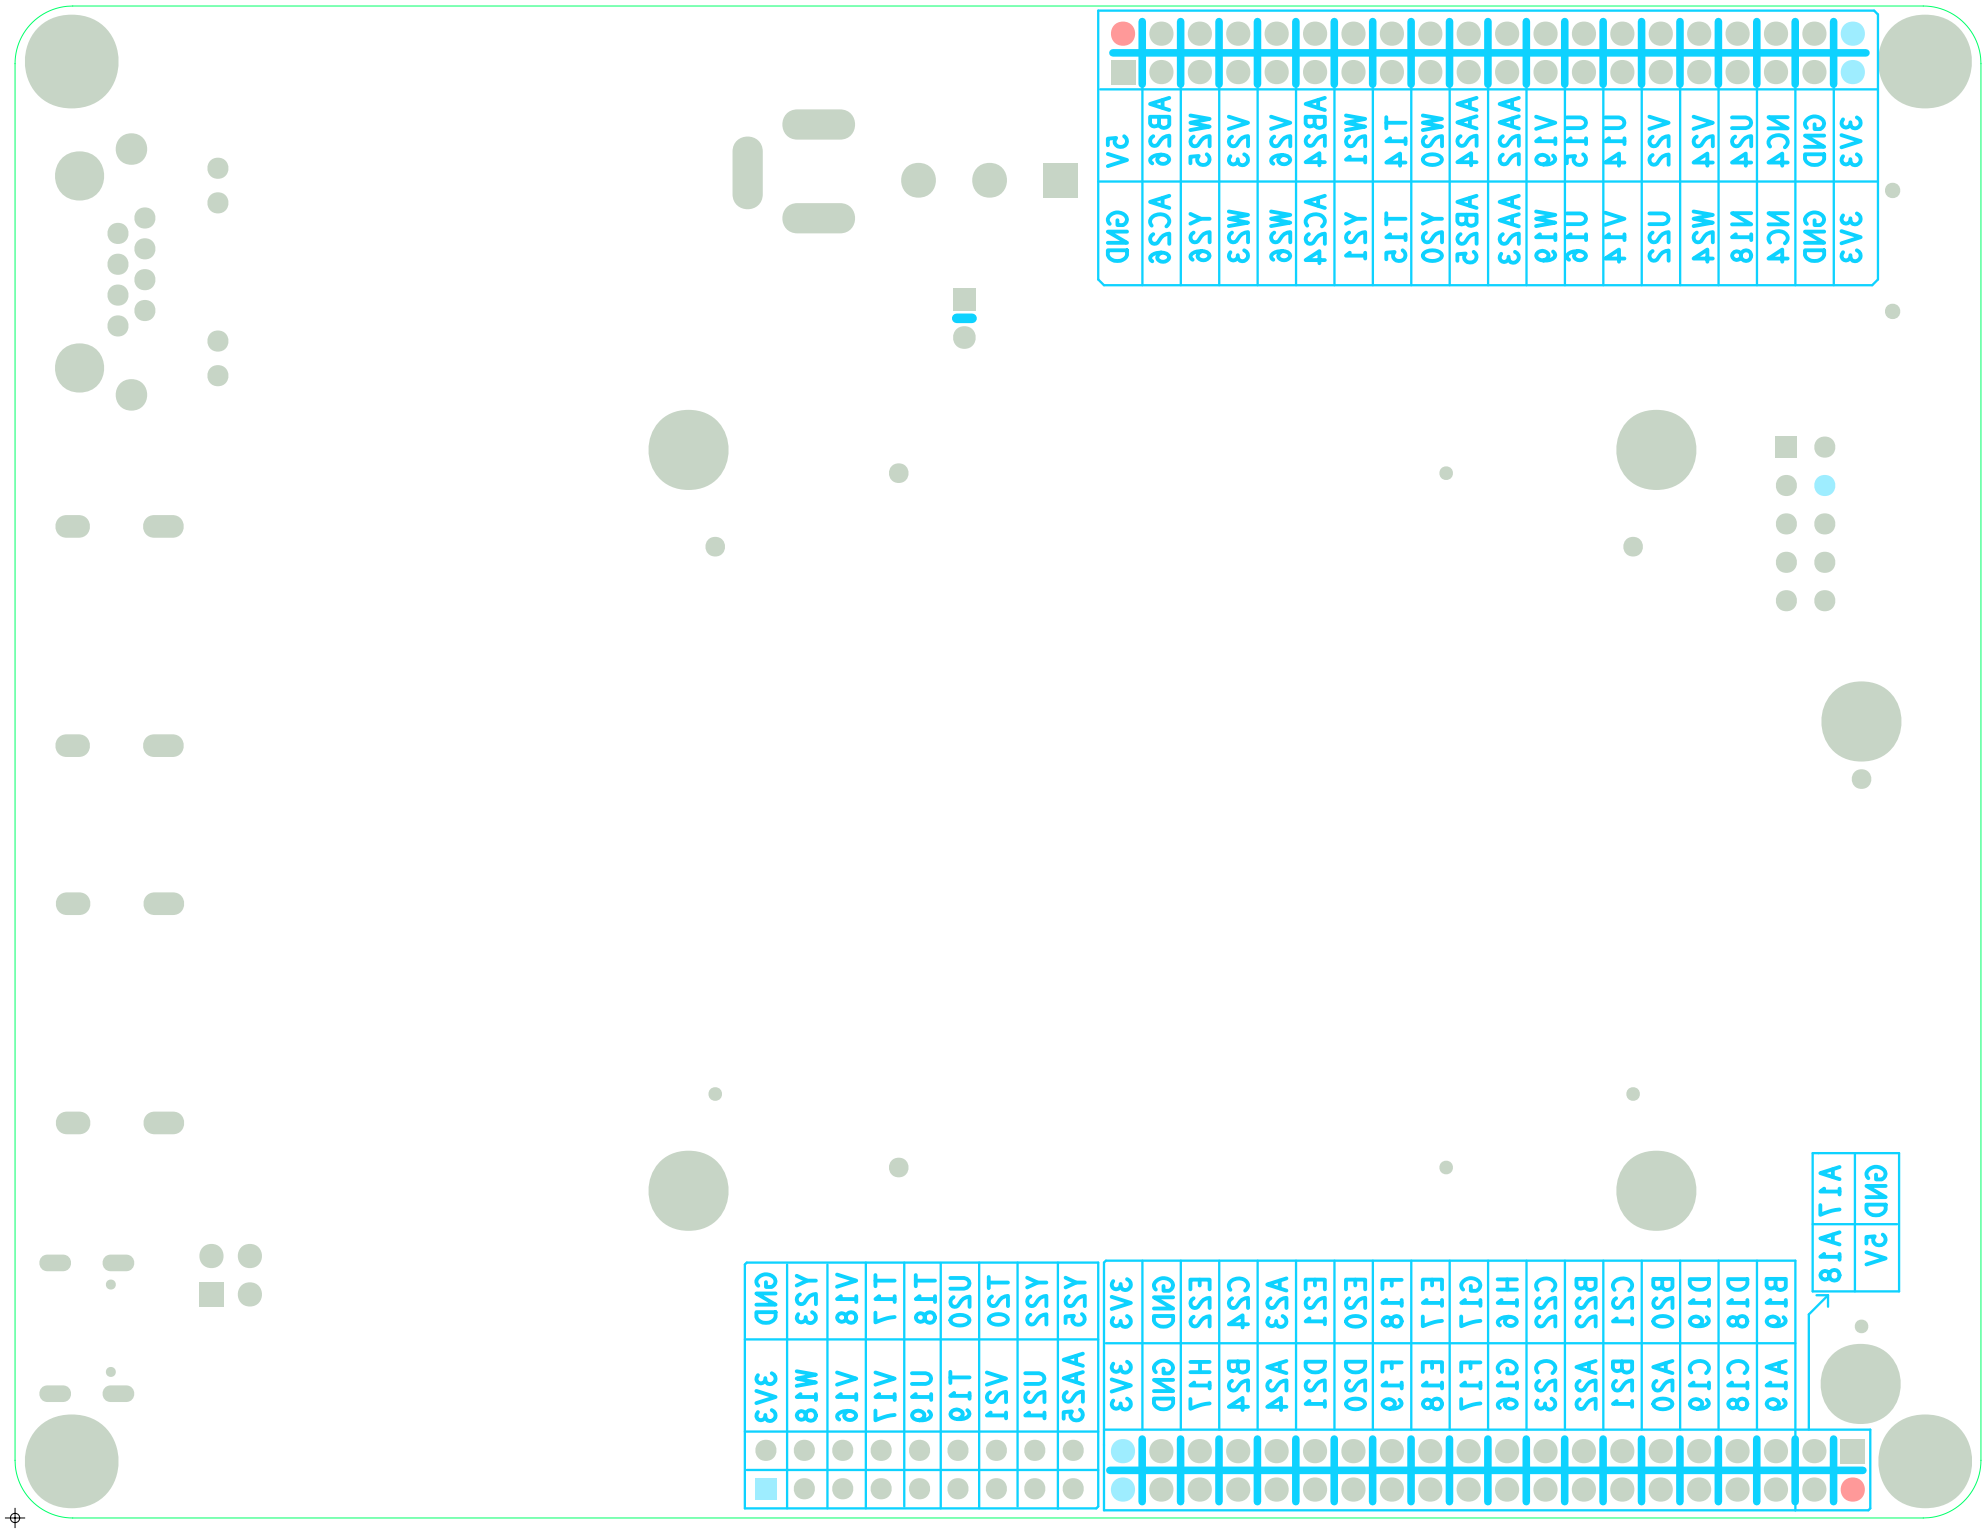
5V
AB26
W25
V23
V26
AB24
W21
T14
W20
AA24
AA22
V19
U15
U14
V22
V24
U24
NC4
GND
3V3
GND
AC26
Y26
W23
W26
AC24
Y21
T15
Y20
AB25
AA23
W19
U16
V14
U22
W24
N18
NC4
GND
3V3
GND
Y23
V18
T17
T18
U20
T20
Y22
Y25
3V3
W18
V16
V17
U19
T19
V21
U21
AA25
3V3
GND
E22
C24
A23
E21
E20
F18
E17
G17
H16
C22
B22
C21
B20
D16
D18
B16
3V3
GND
H17
B24
A24
D21
D20
F19
E18
F17
G16
C23
A22
B21
A20
C16
C18
A16
A17
GND
A18
5V