




USB Conn

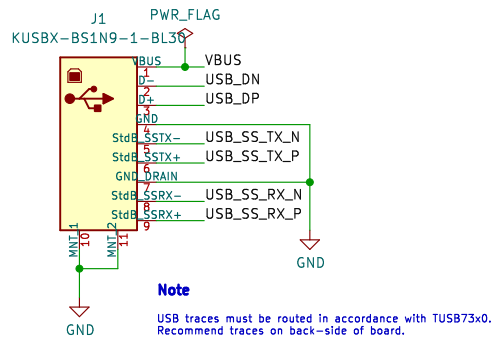


DC Jack




Dual 2FF SIM Holders

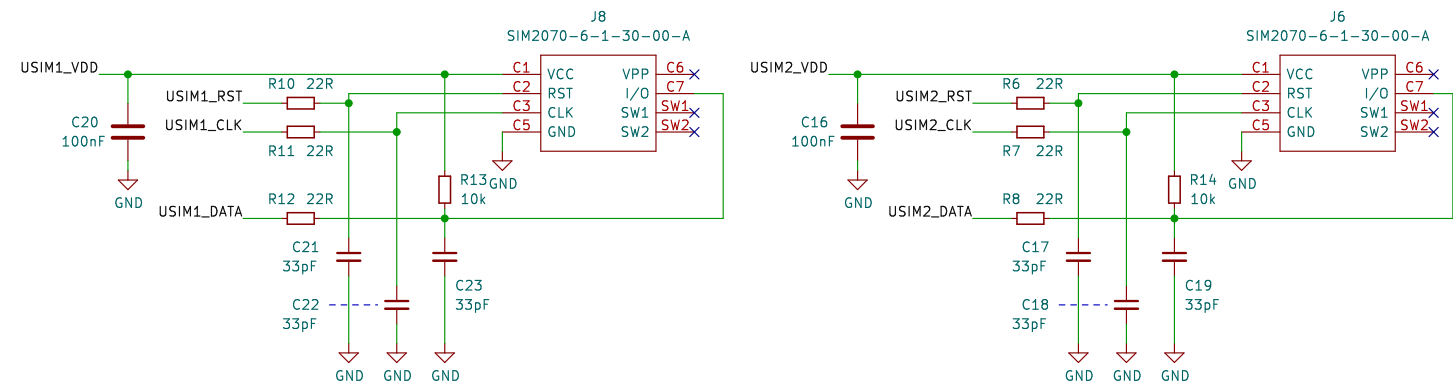


Diode-OR (DC Jack + USB)

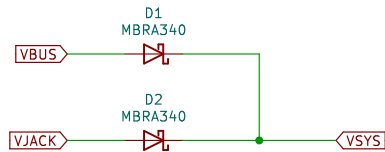


5V Fan Power Header

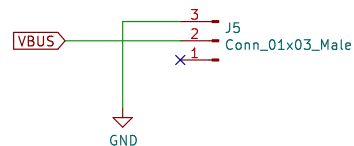

Buck Converter

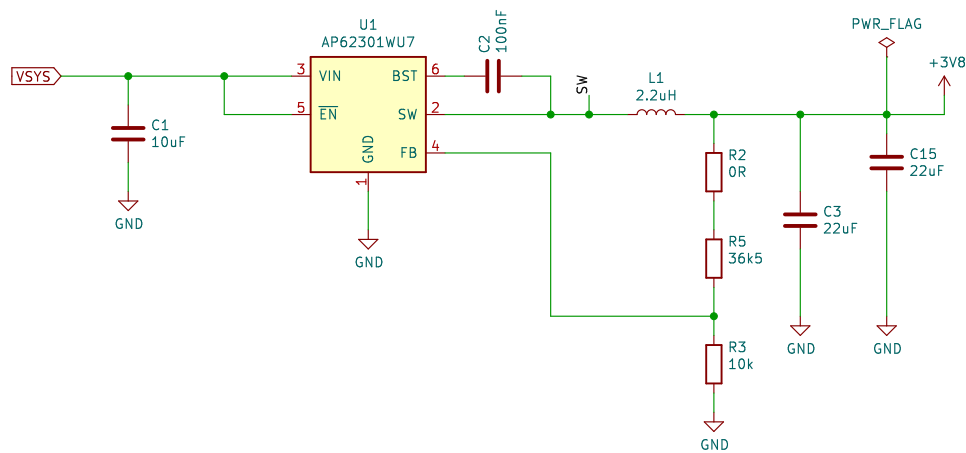


Reset



Mounting Holes

- H1 M2 Threaded Insert
- H2 M2 Threaded Insert

VCC LED



WWAN LED




Power On/Off




Wake-on-WAN



Decoupling

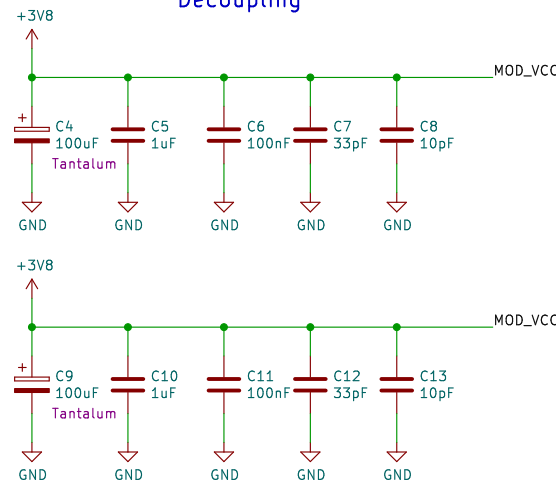

NGFF/M.2 B-Key

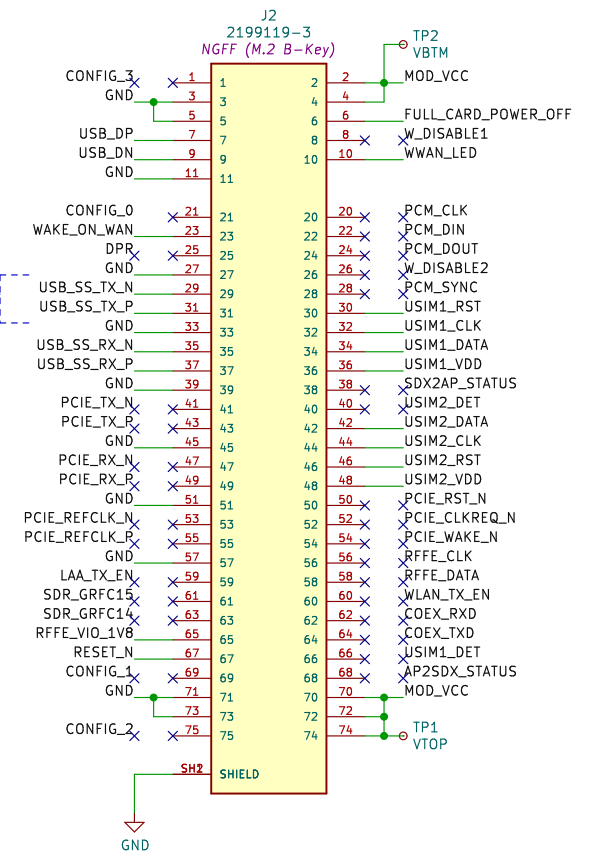

Damien Walsh 2020 - www.damow.net

All resistors 1% unless noted
All capacitors X7R or COG MLCC 6.3V unless noted