




USB Conn

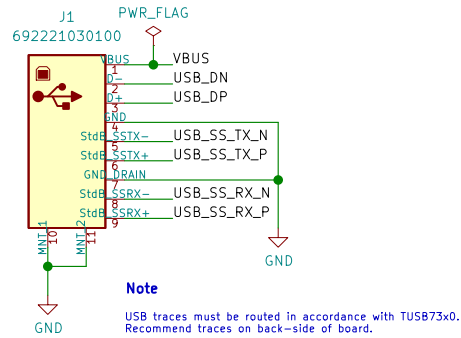


DC Jack




5V Fan Power Header




4FF Nano-SIM Holder

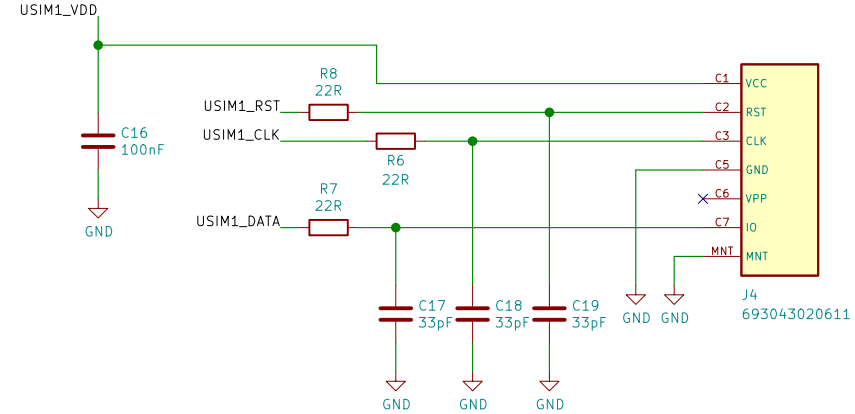

Diode-OR (DC Jack + USB)

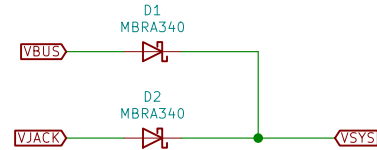

VCC LED



WWAN LED




Power On/Off




Wake-on-WAN



DC-DC (~6V -> 3.8V)

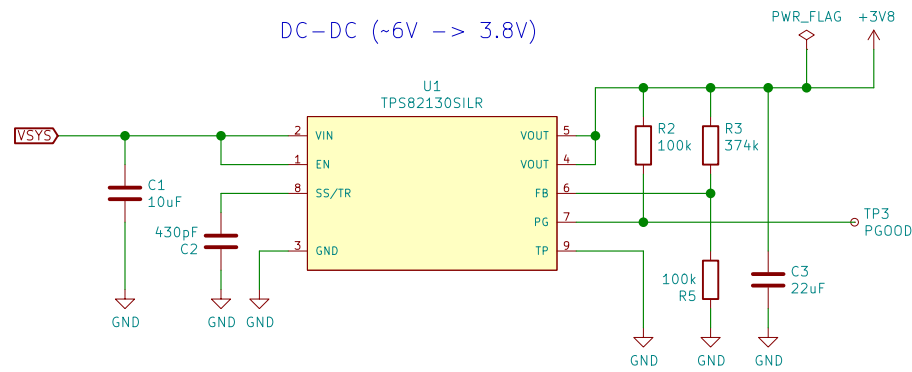


Reset




Mounting Holes

- H1 M2 Threaded Insert
- H2 M2 Threaded Insert

Decoupling

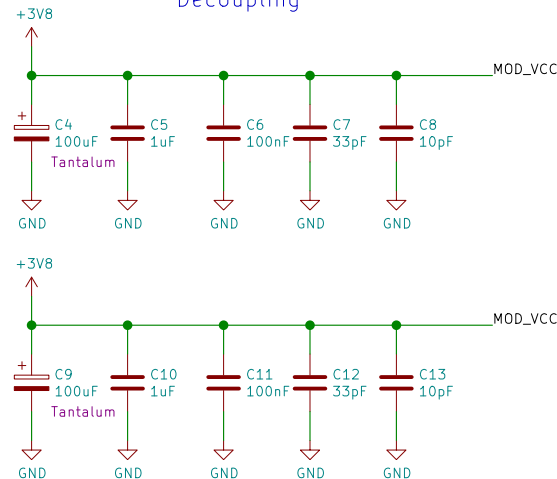

NGFF/M.2 B-Key

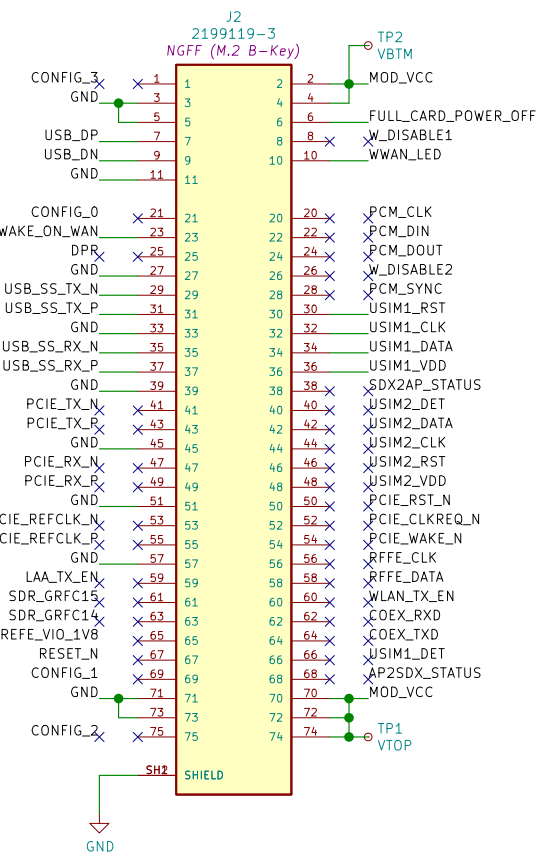

Damien Walsh 2020 - www.damow.net

All resistors 1% unless noted
All capacitors X7R or C0G MLCC 6.3V unless noted

