

IoT Engineering

5: Local Connectivity with Bluetooth LE

CC BY-SA, Thomas Amberg, FHNW
(unless noted otherwise)
Slides: tmb.gr/iot-5



Overview

These slides introduce *Bluetooth Low Energy*.

Examples for the peripheral and central role.

Designing BLE services and characteristics.


2

Prerequisites

Install the Arduino IDE and set up the nRF52840:
Check the Wiki entry on [Installing the Arduino IDE](#).
[Set up the Feather nRF52840 Express](#) for Arduino.
Setting up the board also installs this [BLE library](#).
For testing, a smartphone with BLE is required.


3

IoT reference model

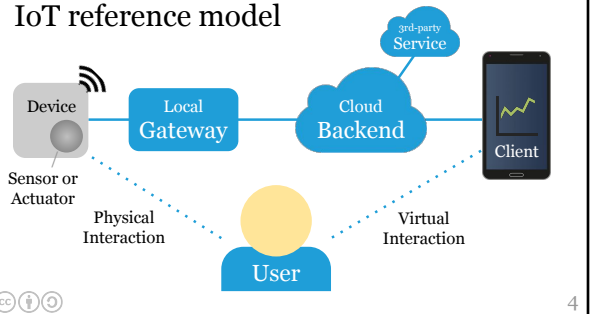

4

BLE reference model

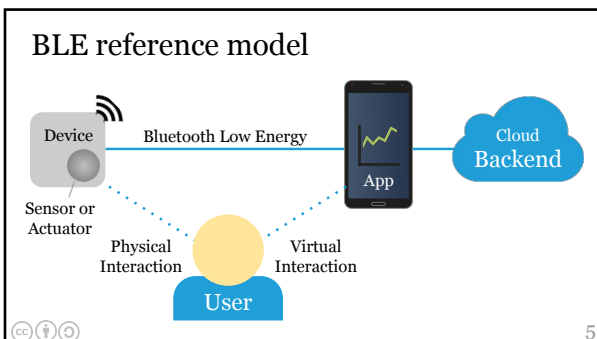

5

Bluetooth Low Energy (BLE)

BLE is a power-efficient Bluetooth variant (since 4.0).

BLE is well suited for small, battery powered devices.

It uses less energy than Wi-Fi and way less than 4/5G.

Range is ~30 m, data rate 1 Mbps, frequency 2.4 GHz.

The **standard** is maintained by the **Bluetooth SIG**.

6

How BLE works

Peripherals advertise the data they have, over the air.
Centrals scan for nearby peripherals to discover them.
The central connects to a peripheral and uses its data.
Data is structured into *services* and *characteristics*.

7

BLE protocol stack

Application — application specific code and formats
BLE library — thin, language-specific wrapper library
GATT — services & characteristics | GAP — discovery
ATT — attribute transport | SMP — security manager
L2CAP — logical link control and adaptation protocol
Link layer — exposed via the host controller interface
Physical layer — dealing with actual radio signals

8

Generic Access Profile (GAP)


GAP defines the following roles, communication types:
Broadcaster and *observer* (connectionless, one-way).
Peripheral and *central* (bidirectional connection).
Each device supports one or more of these roles.

We start with peripheral and central roles.

9

Advertising

A peripheral *advertises* its services by broadcast, in a regular [interval](#).
A central *scans* for all or a subset of services and gets device addresses and, if it's been sent, advertised data.



10

Attribute Transport (ATT)

ATT allows a *client* to access attributes on a *server*.
An *attribute* has a handle, a UUID and permissions.
An *attribute handle* is a server-assigned, 16-bit ID.
A *UUID* is a 16/128-bit universally unique identifier.
Permissions allow you to read, write or get notified.

See [Bluetooth spec v5.1](#), Part F, p. 2288.


11

Generic Attribute Profile (GATT)

[GATT](#) is a simple application level protocol for BLE.
It's connection-based, with a *client* and a *server* role.
This enables a BLE device to provide a RESTful API.
A "GATT API", or *profile*, is a collection of *services*.

Usually, the peripheral acts as a server.

12

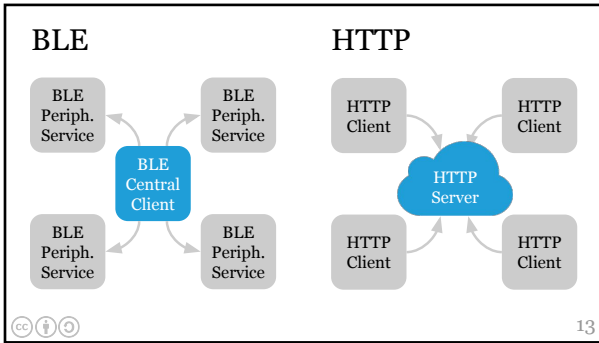

Services

A **GATT service** is a collection of characteristics.

Services encapsulate the behavior of part of a device.

In addition, such a service can refer to other services.

There are **standard** and custom services and profiles.

E.g. the **Battery Service** or the **Heart Rate Service**.

14

Characteristics

A **GATT characteristic** has a value and descriptors.

A *value* encodes data "bits" that form a logical unit.

Descriptors are defined attributes of a characteristic.

Supported procedures: read, write and notifications.

E.g. a **Battery Level** or a **Heart Rate Measurement**.

15

Descriptors

A **GATT descriptor** describes a characteristic value.

E.g. **Presentation Format** or **Valid Range** descriptor.

Descriptors also allow to configure characteristics.

E.g. **Client Characteristic Configuration** descriptor allows a client to enable or disable notifications.


16

Read and write

Connect = the central connects to a peripherals BLE address.

Read = value of a characteristic or its descriptors is returned.

Write = characteristic value, or characteristic descriptor value is set, with/without response.




17

Notifications

Notify = *Client Characteristic Configuration* descriptor of a characteristic, UUID 0x2902, is set to 0x0001 using *Write*.

Value = A *Handle Value Notification* is sent if value changes.

See **Bluetooth spec v5.1**, p. 2360 and p. 2389.



18

BLE explorer apps

For debugging, use any generic BLE explorer app:


Find [BLE explorer apps](#) on the Google Play Store.

Search for "BLE explorer" in the iOS App Store.

Smartphones can act as central or peripheral.

Exploring is a great way to learn about BLE.

19

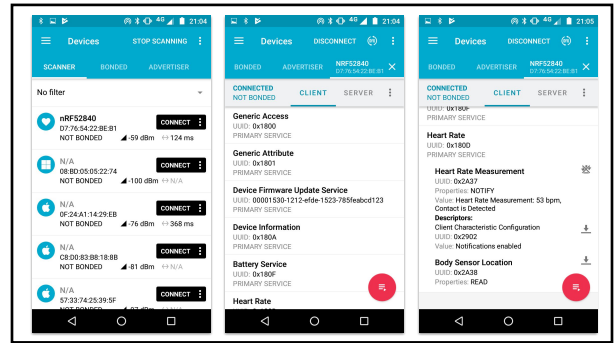

Heart rate service

This service is intended for fitness heart rate sensors:

[Heart Rate Service](#) UUID (16-bit): 0x180D

This service includes the following characteristics:

[Heart Rate Measurement](#) UUID: 0x2A37 [N]
[Body Sensor Location](#) UUID: 0x2A38 [R]
[Heart Rate Control Point](#) UUID: 0x2A39 [W]*

*See also [Heart Rate Service](#) specification.

21

nRF52840 HRM BLE peripheral [.ino](#)

```
hrmSvc = BLEService(0x180D); // See HRM spec
hrmChr = BLECharacteristic(0x2A37); // See spec

hrmSvc.begin(); // to add characteristics
hrmChr.setProperties(CHR_PROPS_NOTIFY); ...
hrmChr.begin(); // adds characteristic

uint8_t hrmData[2] = { 0b00000110, value };
hrmChr.notify(hrmData, sizeof(hrmData));
```

22

Hands-on, 10': HRM BLE peripheral

Build and run the previous nRF52840 BLE example.

Use the [.ino](#) link on the page to get the example code.

Explore the HRM example using a smartphone app*.

Try to enable notifications to get value updates.

*Try [nRF Connect for Android](#) or [iOS](#).

23

Nordic UART service

This service provides a serial connection over BLE:

[Nordic UART Service](#) custom (128-bit) UUID:
0x6E400001-B5A3-F393-E0A9-E50E24DCCA9E

This service includes the following characteristics:

RX (device receives data) UUID: 0x0002 [W]
TX (device transmits data) UUID: 0x0003 [N]

This service is becoming a de facto standard.

24

nRF52840 UART BLE peripheral [.ino](#)

```
// UUID: 6E400001-B5A3-F393-E0A9-E50E24DCCA9E
uint8_t const uartSvcUuid[] = { 0x9E, 0xCA, ...,
0xB5, 0x01, 0x00, 0x40, 0x6E }; // lsb first

uartSvc = BLEService(uartSvcUuid); // 128-bit
rxChr = BLECharacteristic(rxChrUuid); // 128-b.
txChr = BLECharacteristic(txChrUuid); // 128-b.

txChar.setProperties(CHR_PROPS_NOTIFY);
rxChar.setProperties(CHR_PROPS_WRITE);
```

25

Hands-on, 10': UART BLE peripheral

Build and run the previous nRF52840 BLE example.

Use the [.ino](#) link on the page to get the example code.

Write bytes to *RX* with a generic BLE explorer app.

Check the serial monitor to see the received bytes*.

*Why do some bytes not show up?

26

nRF52840 UART BLE central [.ino](#)

```
Bluefruit.begin(0, 1); // 1 central connection
uartSvcClient.begin();
uartSvcClient.setRxCallback(rxCbck); // read
Bluefruit.Central.setConnectCallback(connCbck);

void connCbck(uint16_t connHandle) {
  if (uartSvcClient.discover(connHandle)) {
    uartSvcClient.enableTXD(); // enable notify
    uartServiceClient.print(...); // write data
  } }
... } }
```

27

nRF52840 UART BLE central (ff.) [.ino](#)

```
Bluefruit.Scanner.setRxCallback(found);

void found(ble_gap_evt_adv_report_t* report) {
  if (...Scanner.checkReportForService(
    report, uartServiceClient)) {
    Bluefruit.Central.connect(report);
  } else {
    Bluefruit.Scanner.resume();
  }
}
```

28

Hands-on, 10': UART BLE central

Build and run the previous nRF52840 BLE example.

Use the [.ino](#) link on the page to get the example code.

Open the Arduino serial monitor to enter a message.

Use a second nRF52840 as a UART peripheral.

29

Beacons

Beacons, e.g. [Apple iBeacon](#) are *broadcaster* devices.

Any *observer* can read the data which they advertise.

Lookup of "what a beacon means" requires an app.

Except for [Physical Web](#) / [Eddystone](#) beacons.

These contain an URL to be used right away.

30

nRF52840 beacon BLE observable [.ino](#)

```
BLEBeacon beacon(  
  beaconUuid, // AirLocate UUID  
  beaconMajorVersion,  
  beaconMinorVersion,  
  rssiAtOneMeter);  
beacon.setManufacturer(0x004C); // Apple  
beacon.startAdvertising();  
  
suspendLoop(); // save power
```

31

Hands-on, 10': Beacons

Build and run the previous nRF52840 BLE example.

Use the [.ino](#) link on the page to find the source code.

Test the beacon with a dedicated [iOS/Android](#) app.

Which information is transferred by a beacon?

Start a scan in a public place, e.g. Zürich HB.

32

nRF52840 Scanner BLE Central [.ino](#)

```
Bluefruit.begin(0, 1); // Central  
Bluefruit.Scanner.setRxCallback(found);  
Bluefruit.Scanner.start(0);  
  
void found(ble_gap_evt_adv_report_t* report) {  
  Serial.printBufferReverse( // little endian  
    report->peer_addr.addr, 6, ':');  
  if (Bluefruit.Scanner.checkReportForUuid(...))...  
  Bluefruit.Scanner.resume();  
}
```

33

Hands-on, 10': Scanner BLE Central

Build and run the previous nRF52840 BLE example.

Use the [.ino](#) link on the page to find the source code.

Add a `checkReportForUuid()` for the Battery Service.

Can you spot the UUID in the advertising data?

Consider working in teams => more nRF52840.

34

Security

BLE has [security mechanisms](#) for pairing and more.

Pairing: exchanging identity and keys to set up trust.

Device chooses *Just Works*, *Passkey Entry* or *OOB*.

Or numeric comparison and [ECDH](#) for key exchange.

Some apps add encryption on the application layer.


35

Device API vs. SDK

A *device API* specifies how to talk to the device, from any client (here via BLE).

A platform specific *device SDK* simplifies integration.

E.g. *iOS device SDK* to talk to a device API from iOS.



Battery Service
Battery Level [R]

vs.

```
p = ble.conn(addr);  
b = sdk.getBatt(p);  
x = b.getLevel();
```

36

BLE on Android

There is an official introduction to [BLE on Android](#).
Building a robust BLE app on Android can be tricky.
Use the Nordic Semiconductor [Android-BLE-Library](#).
As an example app, look at the [nRF Toolbox project](#).

Writing a plugin for nRF Toolbox is a good start. 37

BLE on iOS

On iOS the official BLE library is [Core Bluetooth](#).
Its [documentation](#) is a great introduction to BLE.
In iOS there's no way to get a device BLE address.
Instead, a UUID is assigned, as a handle, by iOS.

iOS devices change their Bluetooth MAC address. 38

BLE on Raspberry Pi

On Raspberry Pi Zero W there are many options, e.g.
Node.js libraries: [Noble](#) (central), [Bleno](#) (peripheral)
Python library: [PyBluez](#), [BluePy](#)
Linux C library: [Bluez](#)
CLI: bluetoothctl

39

Summary

BLE provides low power, personal area connectivity.
A BLE central scans for peripherals, who advertise.
Each BLE peripheral provides one or more services.
Services allow to read/write characteristic values.
Descriptors allow to configure notifications.

Next: Raspberry Pi as a Local Gateway.

40

Challenge, 1h+

Design and implement an API for the [DHT11 sensor](#).
[Create UUIDs](#) for your service and its characteristics.
Allow the central to read temperature and humidity.
Chose a data format that fits the sensor value range.
Test your peripheral with a generic BLE explorer.

Done? Consider adding support for notifications. 41

Feedback or questions?

Write me on <https://fhnw-iot.slack.com/>
Or email thomas.amberg@fhnw.ch

Thanks for your time.

42