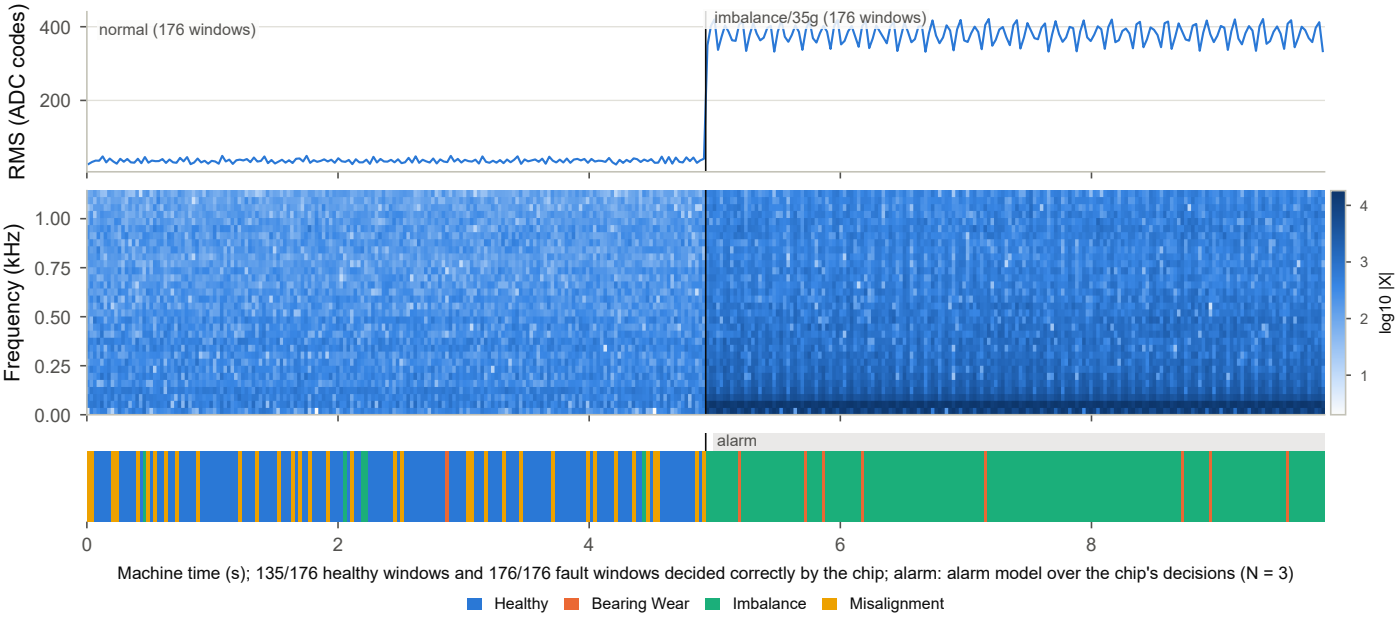

RMS (ADC codes)
400
200
normal (176 windows)
imbalance/35g (176 windows)
Frequency (kHz)
1.00
0.75
0.50
0.25
0.00
log10 |X|
4
3
2
1
alarm
0
2
4
6
8
Machine time (s); 135/176 healthy windows and 176/176 fault windows decided correctly by the chip; alarm: alarm model over the chip's decisions (N = 3)
Healthy
Bearing Wear
Imbalance
Misalignment