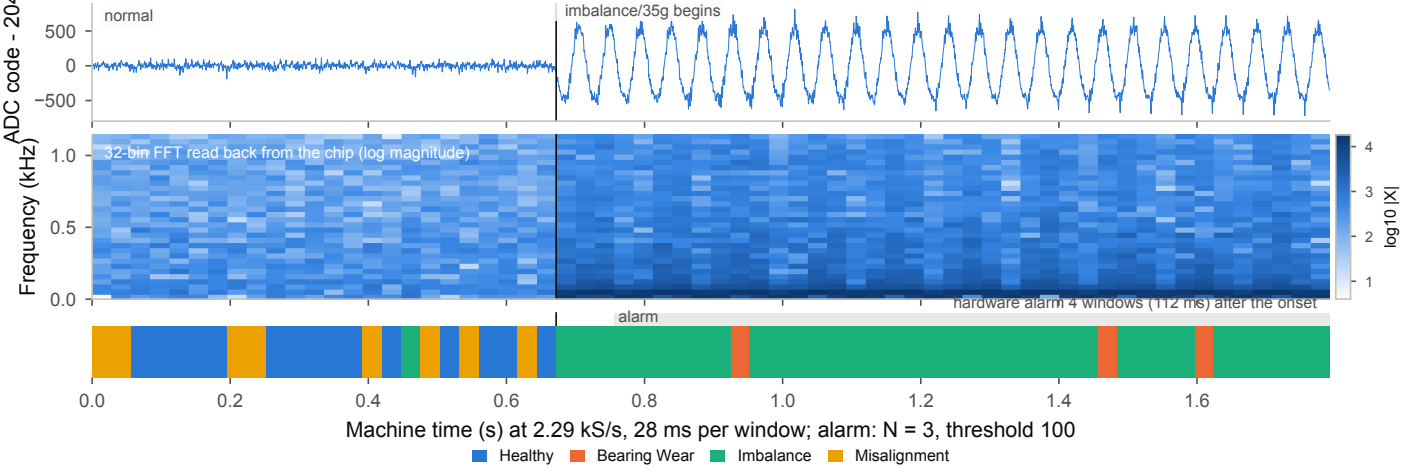

ADC code - 20
normal
imbalance/35g begins
500
0
−500
Frequency (kHz)
32-bin FFT read back from the chip (log magnitude)
1.0
0.5
0.0
log10 |X|
4
3
2
1
hardware alarm 4 windows (112 ms) after the onset
alarm
0.0
0.2
0.4
0.6
0.8
1.0
1.2
1.4
1.6
Machine time (s) at 2.29 kS/s, 28 ms per window; alarm: N = 3, threshold 100
Healthy
Bearing Wear
Imbalance
Misalignment