

CBTS-100 Thermo Shaker Incubator

CBTS-100 thermo shaker incubator for tubes adopts DC brushless motor and microcomputer control technology, and combines the two functions of constant temperature and shaking, which greatly shortens the time of experimental operation and improves work efficiency. It is an ideal automation tool for sample incubation, catalysis, shaking and preservation. CBTS-100 thermo shaker incubator for tubes also has multi-mode functions such as heating, cooling, and shaking to meet the needs of different users.



LCD

LCD displays time and speed; it's easy to accurately set and reproduce experimental conditions.

Self recovery

Power failure self-recovery function, the device can automatically resume operation according to the originally set procedure after power failure recovery. The experimental conditions are consistent and the results are stable.

Accurate Temp. Control

Microprocessor control, good temperature control linearity, temperature control accuracy of $\pm 0.5^{\circ}\text{C}$. Accurate temperature control improves experiment repeatability.

2 mm

Mixing orbit 2 mm, coordinating the shaking speed, forms a 2D mix and has an excellent sample mixing ability.

CE

Multiple safety protection functions, conforming CE safety standards, safe and reliable.


Custom izable Block

Multiple safety protection functions, conforming CE safety standards, safe and reliable.

Product Parameter

Specification	CBTS-100 Thermo Shaker Incubator
Temp. control range	RT. $+5^{\circ}\text{C}$ ~ 100°C
Temp. uniformity	$\leq 0.5^{\circ}\text{C}$
Timer range	1 min~99 h59 min
Temp. control accuracy	$\pm 0.5^{\circ}\text{C}$
Display accuracy	$\pm 0.1^{\circ}\text{C}$
Shaking speed	200~1500 rpm
Heating time (40 ~ 100°C)	≤ 10 min
Mixing orbit	2 mm
Dimension (mm)	300×220×170
Weight	7 kg

CBTS-100 Suitable Block

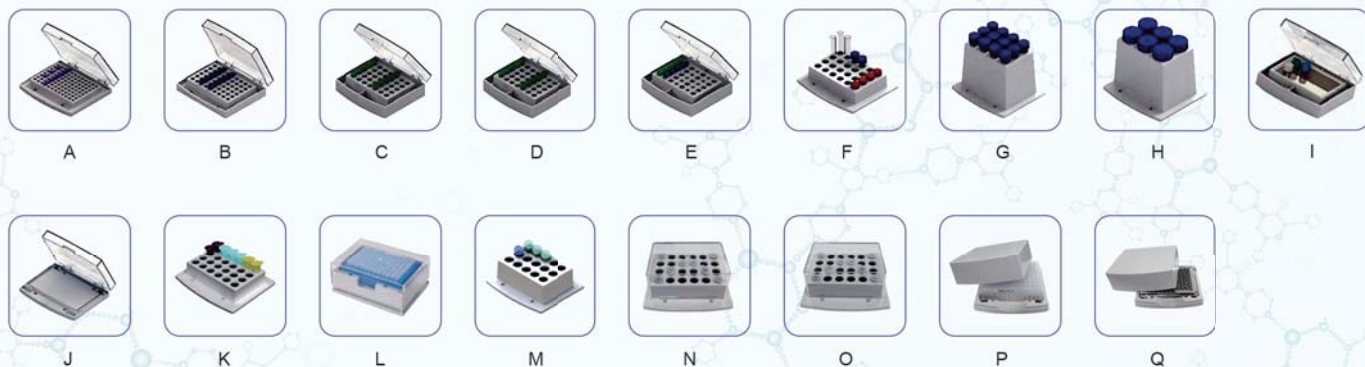

Code	Type	Description	Max. speed	Max. Temp.
AS-02010-00	A	96x0.2 mL tubes	1500 rpm	100 °C
AS-01051-02	B	54x0.5 mL tubes	1500 rpm	100 °C
AS-01051-03	C	35x1.5 mL tubes	1500 rpm	100 °C
AS-01051-04	D	24x5 mL tubes	1500 rpm	100 °C
AS-01051-05	E	15x5 mL Eppendorf tubes	1500 rpm	100 °C
AS-01051-06	F	96 deep-well microplate	1200 rpm	100 °C
AS-01051-07	G	96x0.2 mL microplate	750 rpm	100 °C
AS-01051-08	H	103x67x30 mm rectangular bath block	750 rpm	100 °C
AS-01051-09	I	6x50 mL Falcon tube	1500 rpm	100 °C
AS-01051-10	J	35x2.0 mL tubes	1500 rpm	100 °C
AS-01051-11	K	15x0.5 mL+20x1.5 mL tubes	1200 rpm	100 °C
AS-01051-12	L	24xDia.≤Φ12 mm tubes	800 rpm	100 °C
AS-01051-13	M	12x15 mL Falcon tube	1200 rpm	100 °C
AS-01051-14	N	24x2 mL tubes	1200 rpm	100 °C
AS-01051-15	O	24x1.5 mL tubes	1200 rpm	100 °C
AS-01051-16	P	96x1000 µL deep-well plate	1200 rpm	100 °C
AS-01051-17	Q	MTPs deep-well plate	1200 rpm	80 °C