
NEW




Wear Plate for Core Side

Code: **G172**

Self-Lubricating - Heat Resistance: 150°C

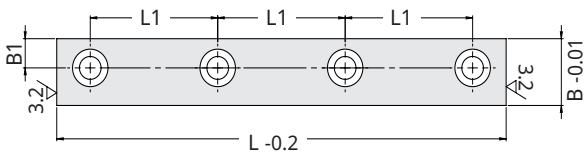

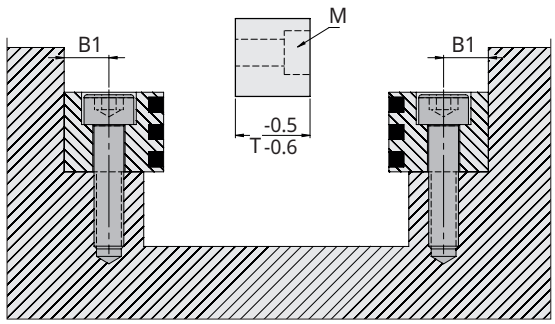


B	T	L	L1	B1	Hole	M
20	12	80	60	9	2	M6
		125	52.5		3	
	16	100	40			
		160	70			
25	22	125	50.5	11		M8
		200	58		4	
	30	160	68		3	
		250	74		4	
32	38	160	64	14	3	M10
		250	72		4	

Order: **G172.** B x L

Material: Bronze + graphite inserts

CAD - Formats:
TIA, STEP, IGES 3D, X_T






Working Direction

Wear Plate Two-Way Sliding Type

Code: **G123**

Self-Lubricating - Heat Resistance: 150°C

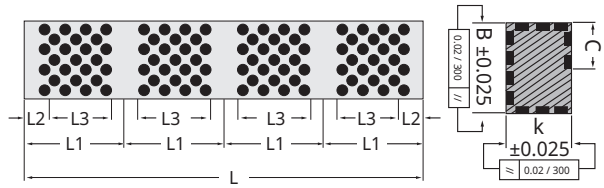


k	B	L	C	L1	L2	L3
10.3	15.3	75	6	25	3	6
		100				
		150				
		200				
		250				
		300				
15.3	25.3	105	8	35	4	8
		140				
		175				
		210				
		245				
		280				
		315				
		350				
		385				
		420				
		455				
		490				
25.3	35.3	135	12	45	5	10
		180				
		225				
		270				
		315				
		360				
		405				
		450				
		496				
35.3	45.3	165	16	55	6	12
		220				
		275				
		330				
		385				
		440				
		495				

Order: **G123.** k x L x B

Material: Bronze + graphite inserts

Die & Mould producers and users can be used by ordering standard product produced in 'L' length and cutting pieces suitable to their needs.






Working Direction

Wear Plate, Plain Type


Code: **G122**

Self-Lubricating - Heat Resistance: 150°C

Form A

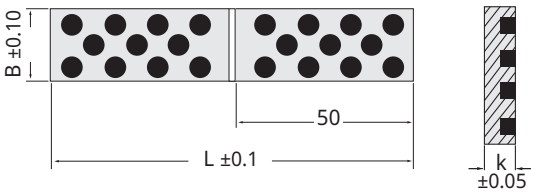

Form B

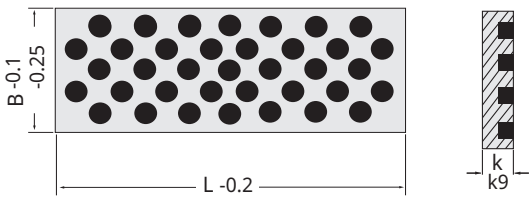


k	L	B	Form
5.3	302	20	A
		35	
		50	
10.3	302	20	A
		35	
		50	
5	50	25	B
	71		
	90		
5	50	40	B
	71		
	80		
	90		
6	100	40	B
	125		
	160	63	
	200		

Order:
G122. k x L x B x Form

Long strip wear plates is compatible for use by perforated connection holes and cutting by user (in desired length). Working surfaces should be lubricated for once.






Working Direction


Wear Plate "T" Shaped

Code: **G121**

Self-Lubricating - Heat Resistance: 150°C




All wear plates friction surfaces are ground and all corners of wear plates are chamfered.



Order:
G121. C x L

C	L	B	k	H
12	350	18	8	5
25	350	22	12	15
35	350	28	18	20

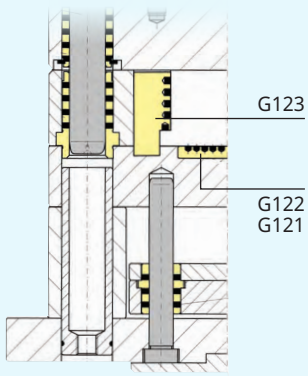


Usage of self-lub. wear plates on injection moulds:

Self-lubricating components provides load carrying capacity beyond expectations in low sliding speeds and a wide temperature range. The graphite inserts are positioned with an appropriate geometric structure. By this means maximum lubricating effect is achieved during sliding. They especially work better with hardened and ground bearings. Sliding surfaces should be slightly lubricated before starting to work.




Mounting example





Wear Plate, "L" Shaped Code: G104

Self-Lubricating & Two-Way Sliding Type

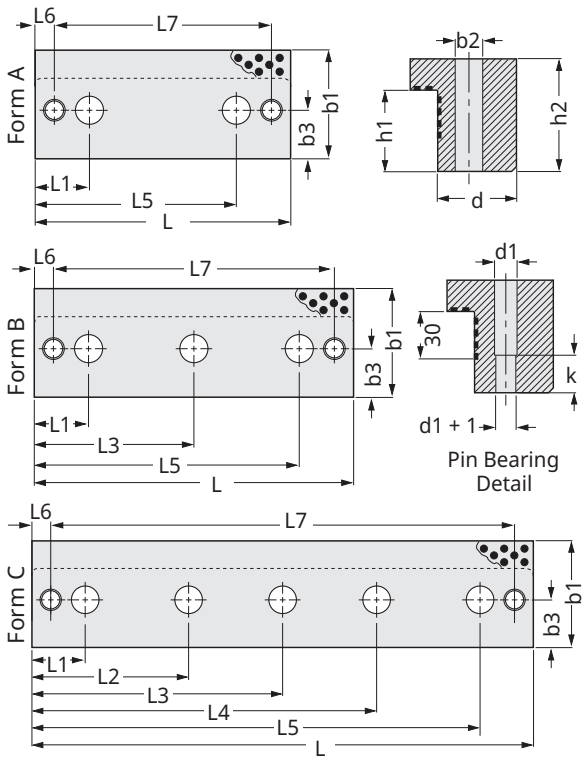

Form	b1	h1	b2	b3	d	d1	k	h2
A	55	55	37	20	13.5	10	23	39
A								
A	70	75	50	30	17.5	12	35	55
A								
B								
C								
A	85	90	63	38	22	16	45	65
A								
B								
C								


Form	L	L1	L2	L3	L4	L5	L6	L7
A	100	27.5	-	-	-	72.5	10	80
A	160					132.5		140
A	160	35	-	-	-	125	12.5	135
A	200					165		175
B	250			125		215		225
C	400		125	200	275	365		375
A	160	42.5	-	-	-	117.5	15	130
A	200					157.5		170
B	250			125		207.5		220
C	400		125	200	275	357.5		370

Order: **G104.** b1 x h1 x L

Material: Bronze + graphite inserts

Wear Plate, "L" Shaped Code: G105

Self-Lubricating & Two-Way Sliding Type

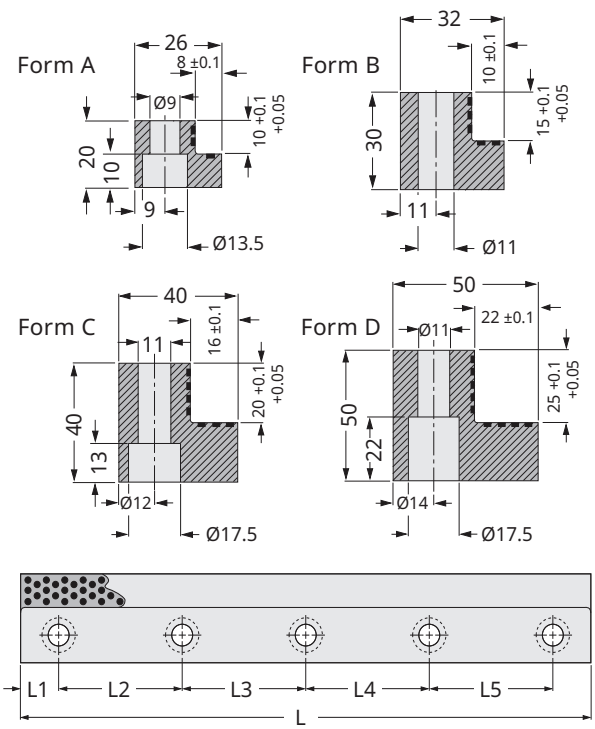


Advantages of Self-Lub. Wear Plate:


* Highly compatible with sudden movements.
* Maximum load carrying capacity at low speeds.
* Can be used under water or with chemical solutions.
* Wide range of temperature resistance.
* Resistant to impact in case of vibration.


Form	L	L1	L2	L3	L4	L5	Hole
A	100	20	60	-	-	-	2
	150		55	55	-		3
	200		55	50	55		4
B	100	20	60	-	-	-	2
	150		55	55	-		3
	200		55	50	55		4
	250		70	70	70		
C	160	15	130	-	-	-	2
	250			80			3
D	200	20	55	50	55	-	4
	250		70	70	70	-	
	300		65	65	65	65	5
	350		80	75	75	80	

Order: **G105.** Form x L

Material: Bronze + graphite inserts

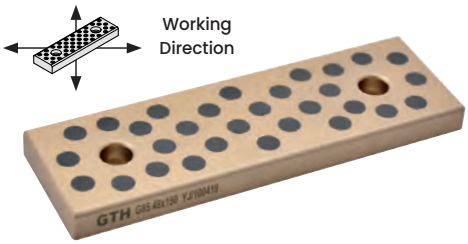




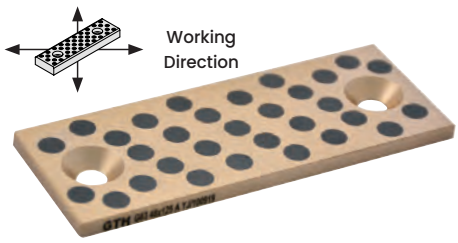

Wear Plate, Self-Lubricating

Code: **G85**

Thickness: 10 mm / with 2 holes

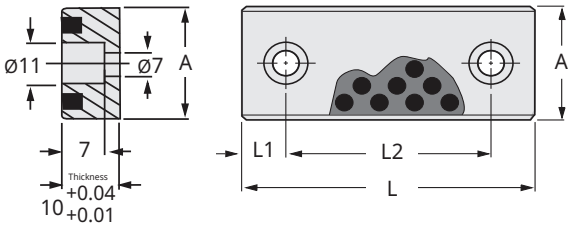

A	L	L1	L2	Hole
18	75	15	45	2 pcs. M6x20
	100	25	50	
	125		75	
	150		100	
28	75	15	45	2 pcs. M6x20
	100	25	50	
	125		75	
	150		100	
38	75	15	45	2 pcs. M6x20
	100	25	50	
	125		75	
	150		100	
48	75	15	45	2 pcs. M6x20
	100	25	50	
	125		75	
	150		100	

Order: **G85.** A x L


Material:
Bronze + Graphite Inserts

Self-lubricating components provides load carrying capacity beyond expectations in low sliding speeds and a wide temperature range. The graphite inserts are positioned with an appropriate geometric structure. By this means, maximum lubricating effect is achieved during sliding. They especially work better with hardened and ground bearings. Sliding surfaces should be slightly lubricated with lithium grease during mounting before starting to work. 25-30% of the surface in plain, self-lubricating bearings and pillar bearings are formed with graphite inserts. The part corresponding to self-lubricating bearing component should be ground and fixed to the sliding axis in parallel.

Wear Plate, Self-Lubricating

Code: **G83**

Thickness: 5 mm / Form: A - B - C - D

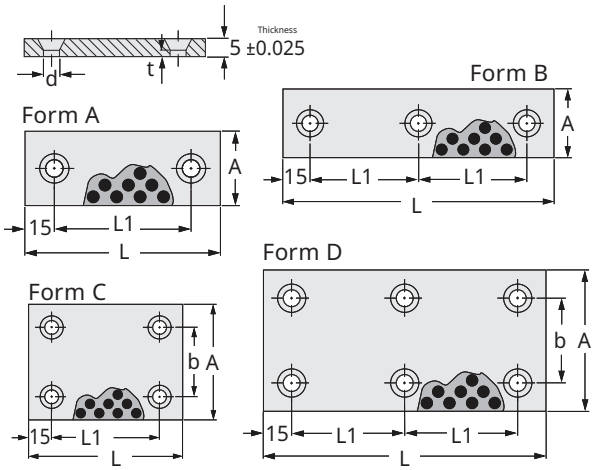


A	L	L1	b	d	t	Form	Screw
18	50	20	-	6.5	1	A	2 pcs. M6x10
	75	45					
	100	70					
	150	60				B	3 pcs.
28	50	20	-	9	0.5	A	2 pcs. M8x10
	75	45					
	100	70					
	150	60				B	3 pcs.
38	50	20	-	9	0.5	A	2 pcs. M8x16
	75	45					
	100	70					
	150	60				B	3 pcs.
48	75	45	-	9	0.5	A	2 pcs. M8x16
	100	70					
	125	95					
	150	60				B	3 pcs.
75	75	45	45	9	0.5	C	4 pcs. M8x16
	100	70					
	125	95					
	150	60				D	6 pcs.
100	100	70	70	9	0.5	C	4 pcs. M8x16
	125	95					
	150	60				D	6 pcs.


Order: **G83.** A x L

Material:
Bronze + Graphite Inserts

Self-lubricating plates are generally preferred because of their strength against lateral loads in large dies or injection moulds. They are maintenance-free, self-lubricating and work long time.








Self-Lubricating
G87



Steel Type
G87C


Wear Plate Code: G84

Self-Lubricating, Thickness: 10 mm / Form: A - B - C

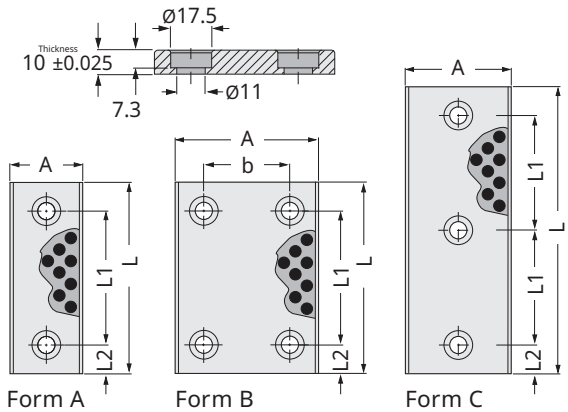

Wear Plate, VDI 3357 Code: G87 - G87C

Self-Lubricating, Thickness: 12 mm / Form: A - B

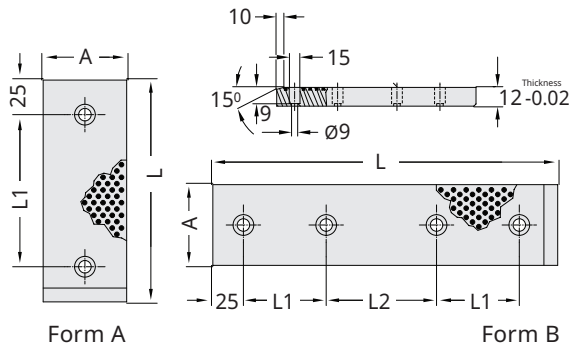

A	L	L1	L2	b	Form
28	75	45	15	-	A
	100	50	25		
	125	75			
	150	100			
38	75	45	15	-	A
	100	50	25		
	125	75			
	150	100			
48	75	45	15	-	A
	100	50	25		
	125	75			
	150	100	50		
	200				
58	75	45	15	-	A
	100	50	25		
	125	75			

A	L	L1	L2	b	Form
58	150	100	25	-	A
	200		50		
75	75	45	15	-	A
	100	50	25		
	125	75			
	150	100			
	200	75			C
100	100	50	25	50	B
	125	75			
	150	100			
	200	150			
	250	200			
125	150	100	25	50	B
	200	150			
	250	200			
150	150	100	25	100	B
	200	150			

A	L	L1	L2	Form
30	80	30	-	A
	100	50		
	125	75		
	160	110		
	200	150		
	225	175		
30	250	60	80	B
	260		90	
	280		110	
	300	80	90	
	320		110	
40	80	30	-	A
	100	50		
	125	75		
	160	110		
	200	150		
50	80	30	-	A
	100	50		
	125	75		
	160	110		
	200	150		
	225	175		
50	250	60	80	B
	300	80	90	
	350	100	100	
	400	120	110	

A	L	L1	L2	Form
60	80	30	-	A
	100	50		
	125	75		
	160	110		
	200	150		
	225	175		
60	240	60	70	B
	250		80	
	260		90	
	280		110	
80	80	30	-	A
	100	50		
	125	75		
	160	110		
	200	150		
	225	175		
80	240	60	70	B
	250		80	
	260		90	
	280		110	
100	260	60	90	B
	280		110	

Order: **G84.** A x L

* Fixing screws: **M10x20**

Order: **G87.** A x L

for steel type
Order: **G87C.** A x L



Self-Lubricating
G91




Steel Type
G91C


Wear Plate, VDI 3357

Code: **G91 - G91 C**


Self-Lubricating, Thickness: 20 mm / Form: A - C - D

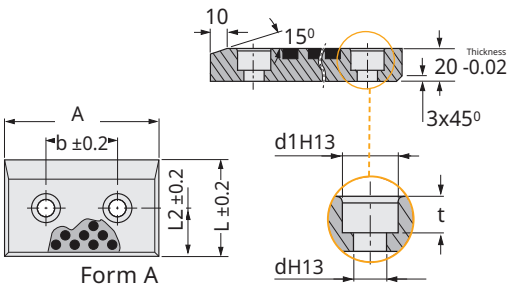

Form A



Form C



Form D

A	L	L1	L2	b	d	d1	t	Screw	Form
80	50	-	25	30	9	15	9	M8x25	A
100	50	-	25	20	13.5	20	13	M12x25	A
	80		40						
125	50	-	25	75	13.5	20	13	M12x25	A
	80		40						
	100	75	25	75	13.5	20	13	M12x25	C
	125	100							
	160	135							
	200	175							
	250	210	40						
	315	275							
160	50	-	25	110	13.5	20	13	M12x25	A
	80		40						
	100	75	25	110	13.5	20	13	M12x25	C
	125	100							
	160	135							
	200	175							
	250	210	40						
	315	275							
160	250	210	40	110	13.5	20	13	M12x25	D
	315	275							

Order:
G91. A x L

for steel type
Order:
G91C. A x L



Self-Lubricating
G90




Steel Type
G90C


Wear Plate, VDI 3357

Code: **G90 - G90 C**

Self-Lubricating, Thickness: 20 mm



Form B




Working Direction
Code: **G91 - G91C / G90 - G90C**

Heat Resistance 150°C
Code: **G91 - G91C / G90 - G90C**

A	L	L1	L2	d	d1	t	Screw	Form
50	80	55	25	9	15	9	M8x25	B
	100	75		13.5	20	13	M12x25	
	125	100						
	160	135						
	200	175						
80	80	55	25	13.5	20	13	M12x25	B
	100	75						
	125	100						
	160	135						
	200	175						
	250	210	40					
	315	275						
100	100	75	25	13.5	20	13	M12x25	B
	125	100						
	160	135						
	200	175						
	250	210	40					
	315	275						

Order:
G90. A x L

for steel type
Order:
G90C. A x L

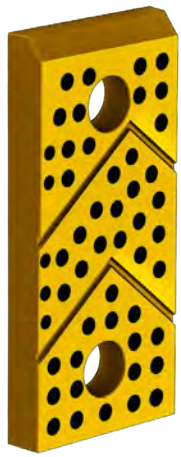

NEW

NAAMS GLOBAL STANDARD COMPONENTS


Ford

3D CAD FILES GUVENAL


Wear Plate with Visual Wear Indicators, WDX138011

Code: G78

Self-Lubricating, Thickness: 20 mm

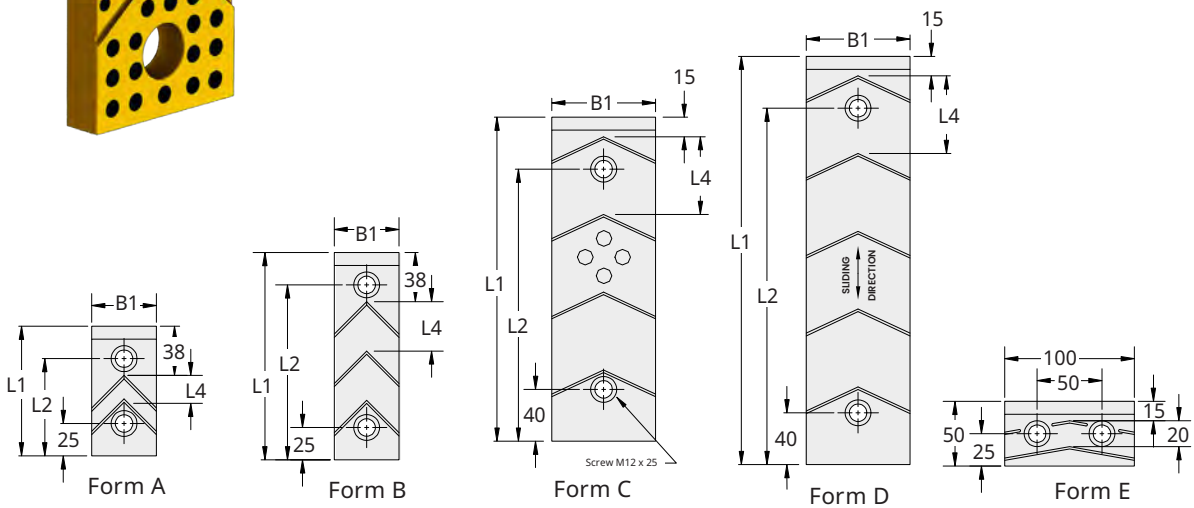

Order Code	B1	L1 ±0.2	L2 ±0.2	L4	Form
G7850100A	50	100	75	18	A
G7850125A		125	100	38	
G7850160B	50	160	135	38	B
G7850200B		200	175	50	
G7880100A	80	100	75	20	A
G7880125A		125	100	40	
G7880160B	80	160	135	40	B
G7880200B		200	175	60	
G7880250C	80	250	210	60	C
G7880315D	80	315	275	60	D
G7810050E	100	50	-	-	E
G78100100A	100	100	75	20	A
G78100125A		125	100	40	
G78100160B	100	160	135	40	B
G78100200B		200	175	60	
G78100250C	100	250	210	60	C
G78100315D	100	315	275	60	D

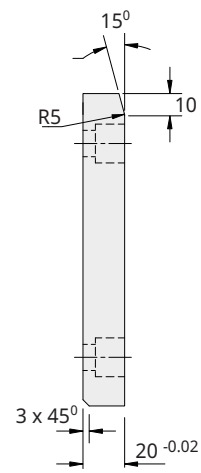

Material:
Bronze + Graphite Inserts

Heat Resistance: 150°C



NEW

GLOBAL STANDARD COMPONENTS NAAMS


Ford

3D CAD FILES GUVENAL


Wear Plate with Visual Wear Indicators, WDX138012

Code: **G78-12**

Self-Lubricating, Thickness: 20 mm

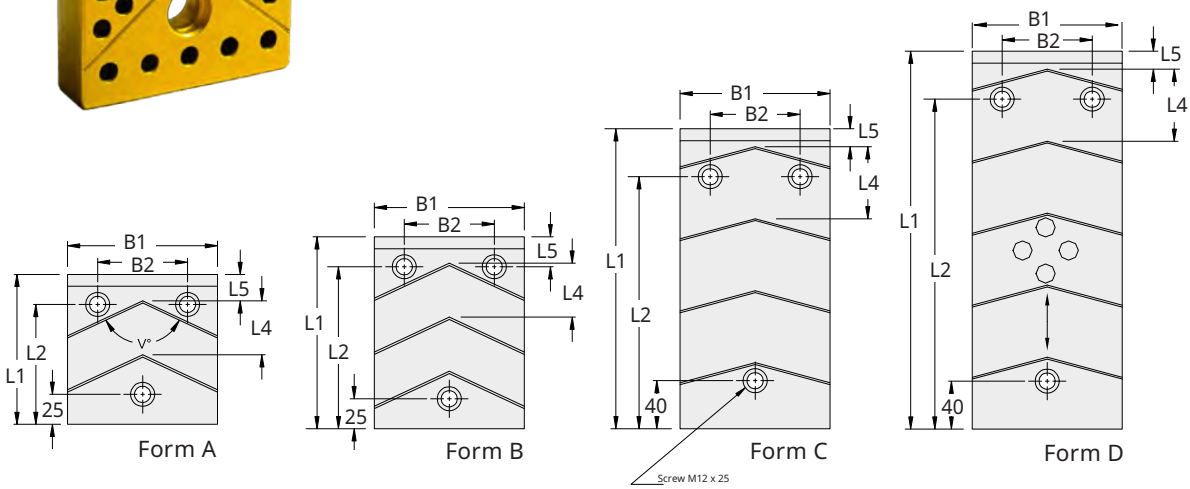


Order Code	B1	B2 ±0.2	L1 ±0.2	L2 ±0.2	L4	L5	Form
G78-12.125100A	125	75	100	75	35	22	A
G78-12.125125A			125	100	45	22	
G78-12.125160B	125	75	160	135	45	22	B
G78-12.125200B			200	175	60	22	
G78-12.125250C	125	75	250	210	60	15	C
G78-12.125315D	125	75	315	275	60	15	D
G78-12.160100A	160	110	100	75	40	15	A
G78-12.160125A			125	100	50	15	
G78-12.160160B	160	110	160	135	50	15	B
G78-12.160200B			200	175	60	15	
G78-12.160250C	160	110	250	210	60	15	C
G78-12.160315D	160	110	315	275	60	15	D

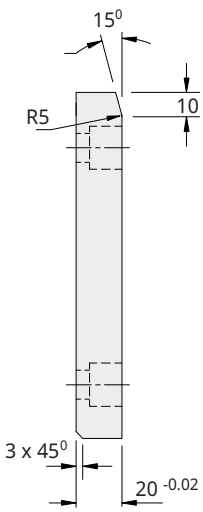

Material:
Bronze + Graphite Inserts

Heat Resistance: 150°C






Wear Plate, ISO 9183-1

Code: **G89**

Self-Lubricating, Thickness: 20 mm / Form: A-B-C-D-E-F

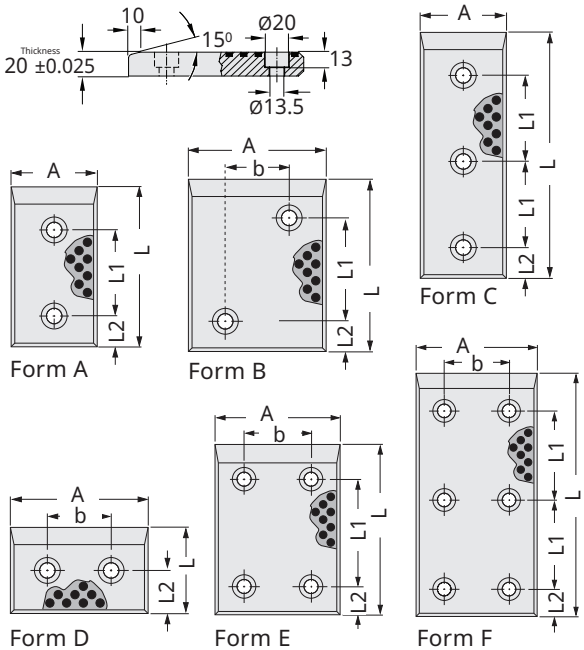


A	L	L1	L2	b	Form
50	80	35	20	-	A
	100	55			
	125	80			
	160	115			
	200	155			
	250	100	20	-	C
80	50	-	25	40	D
	80	35	20	40	B
	100	55			
	125	80			
	160	115	20	40	E
	200	155			
	250	100	20	40	F
	315	132			
100	50	-	25	60	D
	80	35	20	60	B
	100	55			
	125	80	20	60	E
	160	115			
	200	155			
	250	100	20	60	F
	315	132			

A	L	L1	L2	b	Form
125	50	-	25	85	D
	80	35	20	85	B
	100	55	20	85	E
	125	80			
	160	115			
	200	155			
	250	100	20	85	F
	315	132			
160	50	-	25	120	D
	80	35	20	120	E
	100	55			
	125	80			
	160	115			
	200	155			
	250	100	20	120	F
	315	132			

Order:
G89. A x L

* Fixing screws: **M12 x 25**
* Heat Resistance 150°C.






Wear Plate

Code: **G88**

Self-Lubricating, Thickness: 20 mm / Form: A-B-C

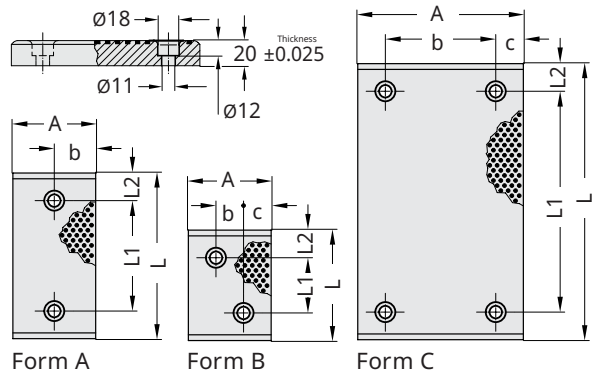

Advantages of Self-Lub. Wear Plate:

* Highly compatible with sudden movements.
* Maximum load carrying capacity at low speeds.
* Can be used under water or with chemical solutions.
* Wide range of temperature resistance.
* Resistant to impact in case of vibration.

A	L	L1	L2	c	b	Form
28	75	45	15	-	14	A
	100	50	25			
	125	75				
	150	100				
38	75	45	15	-	19	A
	100	50	25			
	125	75				
	150	100				
	200	150				
48	75	45	15	-	24	A
	100	50	25			
	125	75				
	150	100				
	200	150				
58	75	45	15	-	29	A
	100	50	25			
	150	100				
75	75	45	15	-	37.5	A
	75	25	25	25	25	B
	100	50	25	-	37.5	A
	100	50	25	25	25	B
	125	75	25	-	37.5	A
	150	100				
	200	150				

A	L	L1	L2	c	b	Form
100	100	50	25	25	50	C
	125	75				
	150	100				
	200	150				
	250	200				
	300	250				
125	125	75	25	37.5	50	C
	150	100				
	200	150				
	250	200				
	300	250				
	350	300				
150	150	100	25	25	100	C
	200	150				
	250	200				
	300	250				
200	200	150	25	25	150	C
	250	200				
	300	250				

Order:
G88. A x L x Form

* Fixing screws: **M10 x 25**
* Heat Resistance 150°C.



Self-Lubricating
G92




Steel Type
G92C


Working Direction


Code: **G92 - G92C**

Wear Plate, AFNOR / ISO 9183-2

Form A - B - C - D - E - F - G - H - I





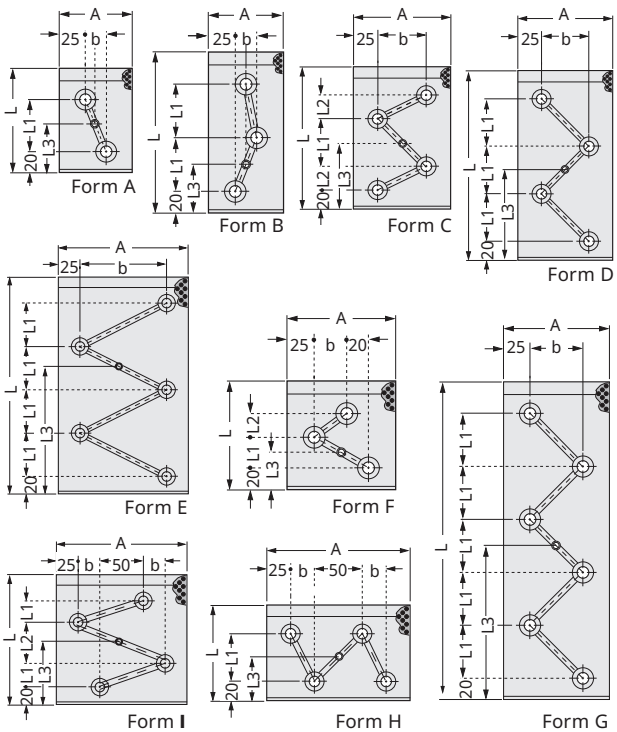


A	L	L1	L2	L3	b	Form
70	100	50	-	45	20	A
	150	50	-	45	10	B
	200	50	-	95	20	D
100	150	50	25	70	50	C
	200	50	-	95	50	D
	250	50	-	145	50	E
150	200	50	-	95	100	D
	250	50	-	145	100	E
100	100	25	25	32.5	30	F
	300	50	-	145	50	G
150	100	50	-	45	25	H
	150	25	50	70	25	**I**
	300	50	-	145	100	G
200	100	50	-	45	50	H

Order:
G92. A x L

for steel type

Order:
G92C. A x L






Working Direction

Wear Plate, VDI 3357

Code: **G96**

Self-Lubricating / Two-Way Sliding Type Form: A - B

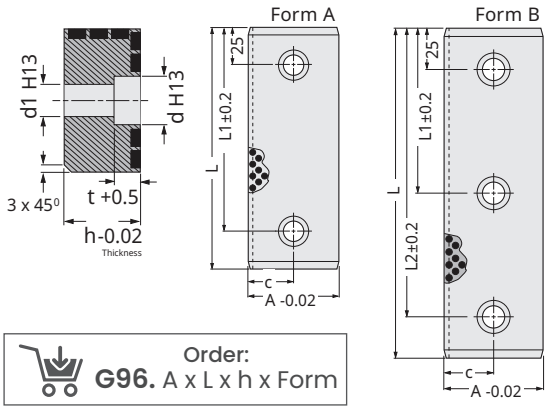


Order:
G96. A x L x h x Form

A	L	L1	L2	c	h	d	d1	t	Form
25	110	85	-	12.5	12	15	9	8.5	A
	120	95							
	110	85			15	18	11	10.5	
	120	95							
60	125	100	-	30	30	20	13.5	13	A
	150	125							
	160	135							
60	200	100	175	30	30	20	13.5	13	B
	125		-		40				A
	150	125							
	160	135							
	200	100	175						**B**



Code: **G93**


Wear Plate, CNOMO

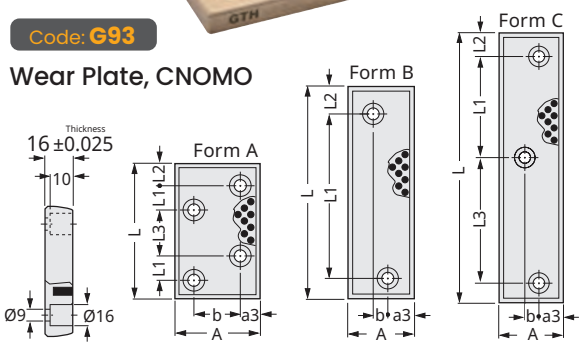

A	L	L1	L2	L3	b	a3	Form
50	63	39	12	-	20	15	B
50	160	126	21	-	12	19	B
50	250	100	21	116	12	19	C
63	100	18	15	34	39	12	A

Order:
G93. A x L


* Fixing screws: **M10**
* Heat Resistance 150°C.

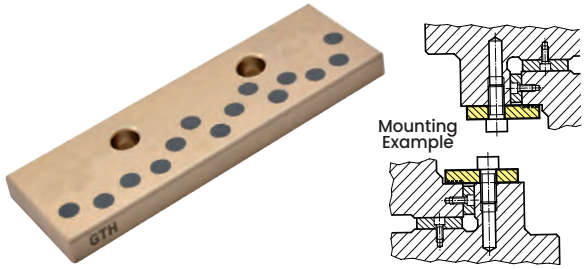

Wear Plate, VDI 3357

Code: **G95**


Self-Lubricating

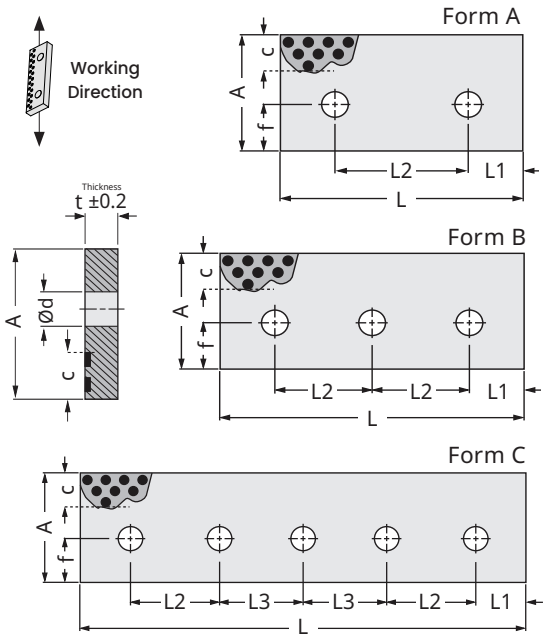

A	L	L1	L2	L3	t	c	f	d	Form
35	160	45	70	-	10	10	15	11	A
	200		110						
	250		80						B
45	160	45	70	-	15	15	15	13.5	A
	200		110						
	250		80						B
55	160	45	70	-	15	20	20	17.5	A
	200		110						
	250		80						B
75	160	45	70	-	25	25	35	17.5	A
	200		110						
	250		80						B
100	160	45	70	-	25	30	40	17.5	A
	200		110						
	250		80						B
	400		80	75					C
	160		70	-	30			22	A
	200		110						
	250		80						B
	400		80	75					C
125	160	45	70	-	30	30	50	22	A
	200		110						
	250		80						B
	400		80	75					C

Order:
G95. A x L x t


Material:
Bronze + Graphite Inserts

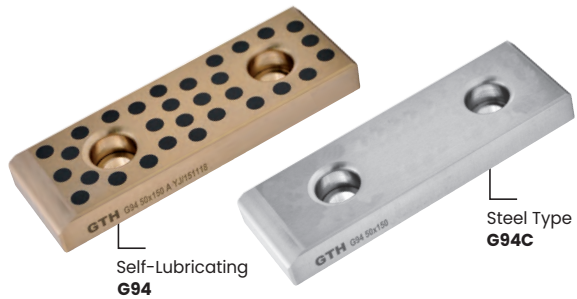

Wear Plate, NAAMS

Code: **G94 - G94C**

Self-Lubricating / Steel

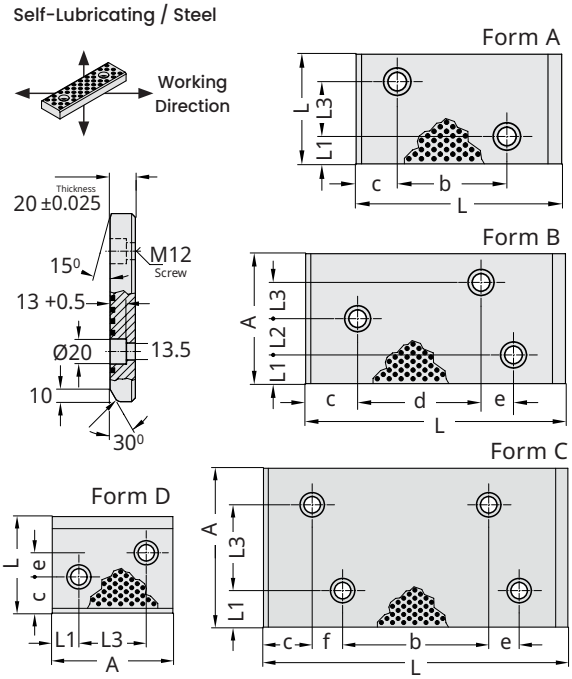


A	L	L1	L2	L3	c	f	b	e	Form
50	100	25	-	-	30	-	30	-	A
	150						80		
	200				40		120		
80	100	20	-	40	30	-	30	-	A
	150						80		
	200						120		
	250				40		170		
	315		20	20			210	25	B
100	50	22	-	56	14	-	-	13	D
	80							20	
	100				30		30	-	A
	150						80		
	200		28	28	40	-	95	25	B
	250						145		
	315						210		
125	80	25	-	75	30	-	-	20	D
	100						30	-	A
	150						80		
	200		37	38	40	-	95	25	B
	250						145		
	315		-	75		25	185		C
160	100	30	-	100	30	-	30	-	A
	150						80		
	200		50	50	40		95	25	B
	250		-	100		25	120		C
	315						185		

Order:
G94. A x L

for steel type
Order:
G94C. A x L




Mounting example






Cam Driver Plate, VDI 3357

Code: **G109**

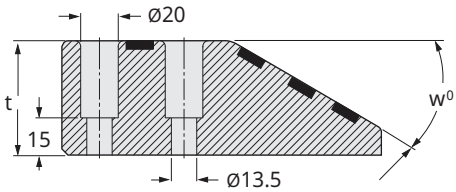

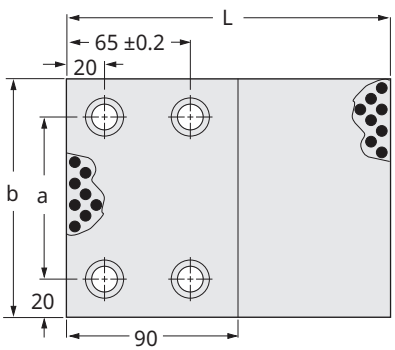

b	L	t	a	w
100	170	45	60	20⁰
125			85	
150			110	
100	150		60	30⁰
100	170	60		
125	150	45	85	
125	170	60		
150	150	45	110	
150	170	60		


Order: **G109.** b x L x t


Material: Bronze + graphite inserts

Self-Lub. Angular Wear Plates for Upper and Lower Body of Cam Units Tolerance between hole distances is ± 0.25. ± 0.25 is used for all dimensions where tolerance is not specified.

Cam Driver Plate, VDI 3357

Code: **G109C**

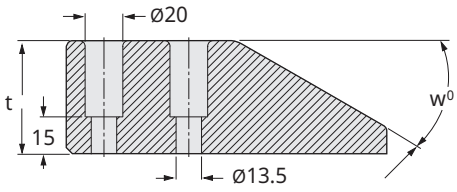

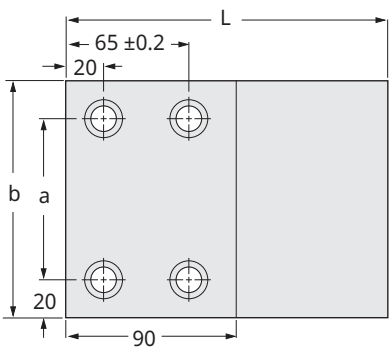

b	L	t	a	w
100	170	45	60	20⁰
125			85	
150			110	
200			160	
100	150		60	30⁰
100	170	60		
125	150	45	85	
125	170	60		
150	150	45	110	
150	170	60		
200	150	45	160	
200	170	60		

Order: **G109C.** b x L x t

Material: Steel, Hardened

Steel Type, Angular Wear Plates for Upper and Lower Body of Cam Units Tolerance between hole distances is ± 0.25. ± 0.25 is used for all dimensions where tolerance is not specified.




Self-Lubricating
G108



Steel Type
G108C

Cam Driver Plate

Code: **G108 - G108C**

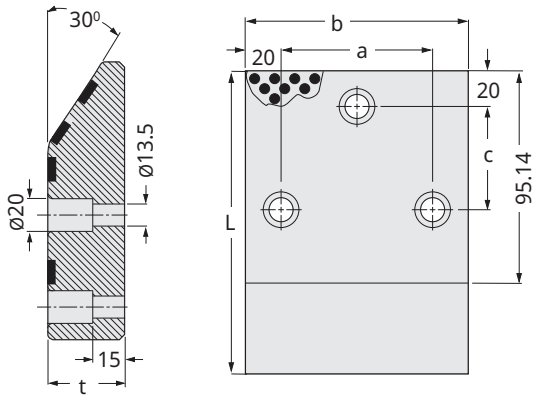


b	L	t	a	c
100	125	30	60	50
	150	45		45
	170	60		
125	125	30	85	50
	150	45		45
	170	60		
160	125	30	120	50
	150	45		45
	170	60		

Order:
G108. b x L

for steel type
Order:
G108C. b x L

Self-Lub. & Steel Angular Wear Plates for Upper and Lower Body of Cam Units
Tolerance between hole distances is ± 0.25. ± 0.25 is used for all dimensions where tolerance is not specified.






Code: **G76**

Return Cam Plate

Order:
G76. A x L



A	L	b	t	L1	L2	d	d1	h
25	60	11	30	30	15	11	17.5	18
32	60	16	38	30	15	13	20	23
32	80	16	38	40	20	13	20	23



Self-Lubricating
G106




Steel Type
G106C

Guide Bar, VDI 3387

Self-Lubricating & Steel Types

Code: **G106 - G106C**

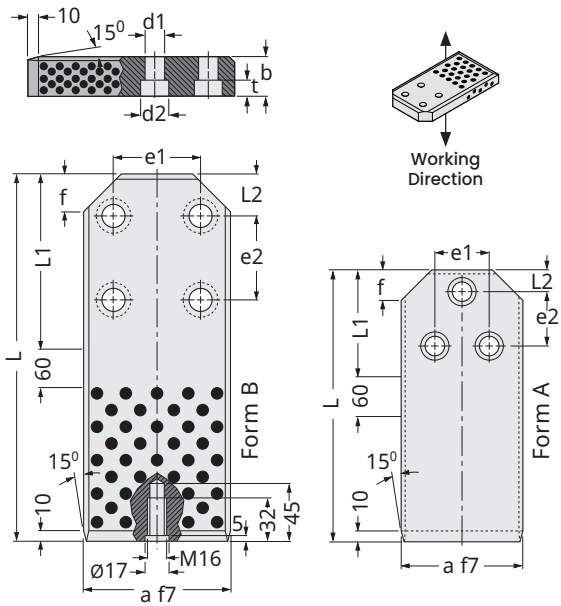

a	b	L	L1	L2	e1	e2	f	d1	d2	t	Form
63	36	200	90	20	36	50	18	14	20	16	A
71											
90	45		100		50		28	18	26	21	
112											
112		250									
140	45	315	150	40	90	80	36	22	33	25.5	B
140		400									
140	56										
190											
240		500	250		160	160		26	40	30.5	
240		630									


G106
Material:
Bronze + graphite inserts

G106C
Material:
Steel, Hardened

Order:
G106. a x b x L


Order:
G106C. a x b x L





G111 Self-Lubricating
Cam Plate, "V" Guide - VDI 3357


Code: **G111**

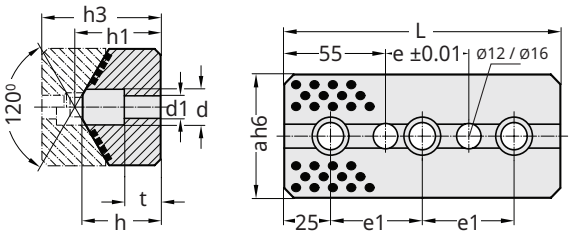

a	L	h1	h	h3	e	e1	d	d1	t	Hole
65	150	47	44	65	45	100	20	13.5	20	2
	200				95	150				
	250				145	100				3
	300				195	125				
125	150	52	47	85	45	100	26	17.5	15	2
	200				95	150				
	250				145	100				3
	300				195	125				


Order:
G111. a x L

There is ± 0.12 tolerance between fixing holes and ± 0.10 tolerance between pin holes.




G139 Self-Lubricating
Cam Plate, "V" Guide

Code: **G139**

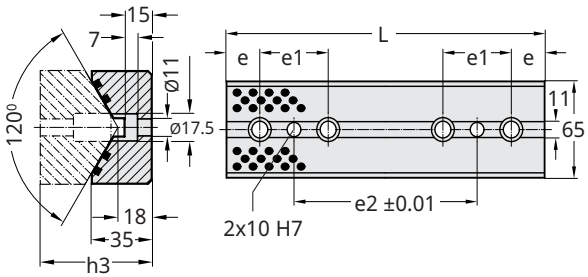

h3	L	e	e1	e2	Hole
65	100	20	60	20	2
	150	25	50	50	3
	200			100	4
	250			150	5
	300			200	6


Order:
G139. h3 x L

Material:
Bronze + graphite inserts




G111C Steel
Cam Plate, "V" Guide - VDI 3357

Code: **G111C**

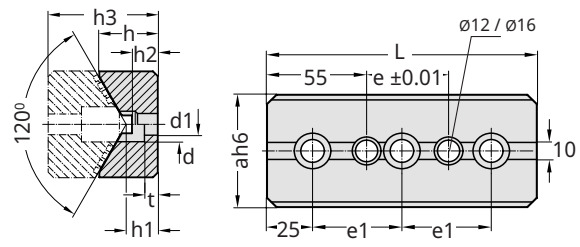

a	L	h1	h	h2	h3	e	e1	d	d1	t	Hole
65	150	18	35	17	65	45	100	20	13.5	8	2
	200					95	150				
	250					145	100				3
	300					195	125				
125	150	33	60	32	85	45	100	26	17.5	15	2
	200					95	150				
	250					145	100				3
	300					195	125				


Order:
G111C. a x L

Material:
Steel, Hardened




G139C Steel
Cam Plate, "V" Guide

Code: **G139C**

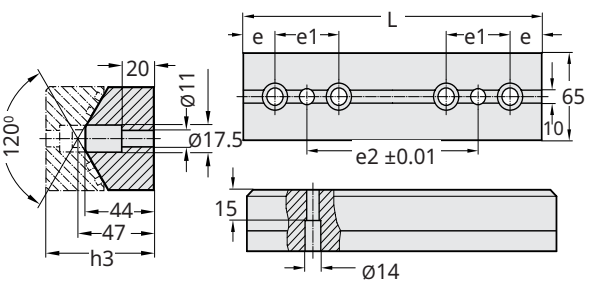

h3	L	e	e1	e2	Hole
65	100	20	60	20	2
	150	25	50	50	3
	200			100	4
	250			150	5
	300			200	6

Order:
G139C. h3 x L

Material:
Steel, Hardened