
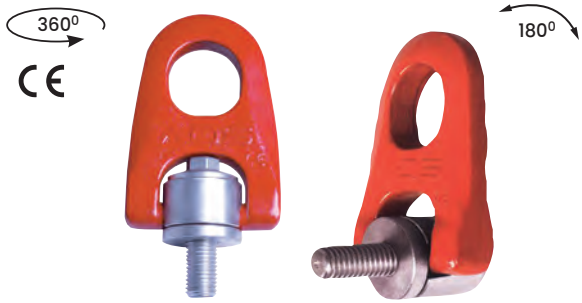


Code: **AK400**

Double Swivel Ring - Eyebolt

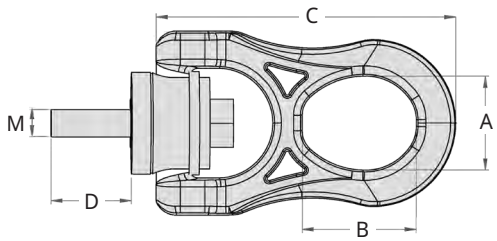

Order Code	M	A	B	C	D
AK400 M8	M8	27.5	33.5	88.5	15
AK400 M10	M10	27.5	33.5	88.5	20
AK400 M12	M12	27.5	33.5	88.5	20
AK400 M14	M14	37.5	49	123.5	38
AK400 M16	M16	37.5	49	123.5	38
AK400 M18	M18	37.5	49	123.5	38
AK400 M20	M20	37.5	49	123.5	38
AK400 M24	M24	55.5	73	176.5	50
AK400 M30	M30	55.5	73	176.5	50

Eyebolt p : Load Capacity - T on


M	p	p	p	p	45° p	60° p	45° p	60° p
M8	0.3	0.6	0.3	0.6	0.4	0.3	0.6	0.3
M10	0.6	1.2	0.6	1.2	0.8	0.6	1.3	0.6
M12	1	2	1	2	1.4	1	2.1	1
M14	1.3	2.6	1.3	2.6	1.8	1.3	2.7	1.3
M16	1.6	3.2	1.6	3.2	2.2	1.6	3.4	1.6
M18	2	4	2	4	2.8	2	4.2	2
M20	2.5	5	2.5	5	3.5	2.5	5.3	2.5
M24	4	8	4	8	5.6	4	8.4	4
M30	6.3	12.6	6.3	12.6	8.8	6.3	13.2	6.3

Material: Class > 8CE Safety Certificated



Code: **AK450**

Heavy Tonnage Swivel Ring - Eyebolt

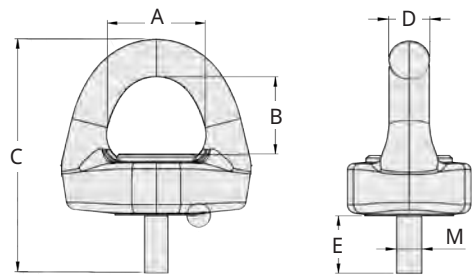

Order Code	M	A	B	C	D	E
AK450 M8	M8	33	27	73	13	20
AK450 M10	M10	33	27	73	13	20
AK450 M12	M12	48	40	105	20	27
AK450 M16	M16	48	40	105	20	27
AK450 M20	M20	48	40	105	20	27
AK450 M24	M24	72	60	145	30	31
AK450 M30	M30	72	60	155	30	39
AK450 M36	M36	103	86	215	44	45
AK450 M42	M42	103	86	225	44	55
AK450 M48	M48	103	86	235	44	65

Eyebolt p : Load Capacity - T on

M	p	p	p	p	45° p	60° p	45° p	60° p
M8	0.3	0.6	0.3	0.6	0.4	0.3	0.6	0.3
M10	0.6	1.2	0.6	1.2	0.8	0.6	1.3	0.6
M12	1	2	1	2	1.4	1	2.1	1
M16	1.6	3.2	1.6	3.2	2.2	1.6	3.4	1.6
M20	2.5	5	2.5	5	3.5	2.5	5.3	2.5
M24	4	8	4	8	5.6	4	8.4	4
M30	6.3	12.6	6.3	12.6	8.8	6.3	13.2	6.3
M36	10	20	10	20	14	10	21	10
M42	12.5	25	12.5	25	17.5	12.5	26.3	12.5
M48	15	30	15	30	21	15	31.5	15

Material: Class > 8CE Safety Certificated



Lifting equipment manufactured as forging in Türkiye, has been registered that its production quality is in European standards with "Approval of Material Manufacturer" certificate given by Germanischer Lloyd.

Class > 8CE Safety Factor 5 : 1

Maximum Lifting Load (Safety Factor ≥ 5:1)


Germanischer Lloyd


CE



Rotary Safety Eyebolt

Code: **G140**

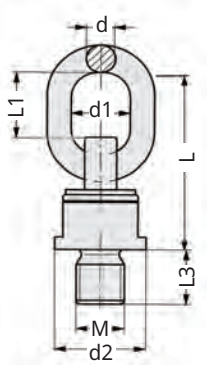





* Pivot angle **180⁰** degree and **360⁰** degree of rotation



* **45⁰** angle mark works as an angle indicator
* Body engraved with WLL and thread size



* Ball bearing inserted ensures smooth rotation

Mounting Example





Maximum Lifting Load
(Safety Factor ≥ 5:1)


p : Ton

Order Code	M x Thread	d	d1	d2	L	L1	L2	L3	p 0°	p 90°	p 0 - 45°	p 45 - 60°	p 0 - 45°	p 45 - 60°	Weight
G140M8	M8 x 1.25	12	30	40	98	44	46	12	0.6	0.4	0.4	0.4	0.84	0.6	0.44 kg.
G140M10	M10 x 1.50	12	30	40	98	44	46	19	0.9	0.6	0.6	0.6	1.26	0.9	0.45 kg.
G140M12	M12 x 1.75	12	30	40	98	44	46	19	1.2	0.7	0.8	0.7	1.58	1.12	0.45 kg.
G140M14	M14 x 2.0	12	30	40	98	44	46	31.8	2	1.25	1.25	1.25	2.62	1.87	0.44 kg.
G140M16	M16 x 2.0	12	30	40	98	44	46	31.8	2.6	1.5	1.4	1.3	3.15	2.25	0.48 kg.
G140M20	M20 x 2.5	20	40	70	160	67	76	38.1	4	2.5	2.8	2.5	5.25	3.75	2.3 kg.
G140M24	M24 x 3.0	20	40	70	160	67	76	38.1	7	4	4.9	4	8.4	6	2.35 kg.
G140M30	M30 x 3.5	22	51	79	206	95	91	50	10	6	7	6	12.6	9	3.75 kg.
G140M36	M36 x 4.0	22	51	79	206	95	91	54	15	10	14	10	21	15	3.9 kg.
G140M42	M42 x 4.5	26	65	93	230.5	108	100.5	63	17	13	18.2	13	27.3	19.5	5.9 kg.
G140M48	M48 x 5.0	26	65	93	230.5	108	100.5	68	18	14	19.6	14	29.4	21	6.15 kg.
G140M56	M56 x 5.5	32	70	105	278	120	132	84	28	20	28	20	42	30	10 kg.
G140M64	M64 x 6.0	32	70	105	278	120	132	95	28	20	28	20	42	30	10.7 kg.




Rotary Safety Eyebolt: By absorbing sudden and rigid motion during lifting - bending and breaking of sling / rope / chain that can be occurred due to swinging of load, it will amortise costs above possible damages with safety lifting and carrying. Special forged steel (class 8) product, 4 times safety against fracture in rotation direction of full load, hinged rotary design that can be taken correct position and be turned axially by aligning movable ring 180⁰ in loaded position.
* 42CrMo High Quality Alloy Steel * High precision ISO metric thread tolerances provides a good surface contact



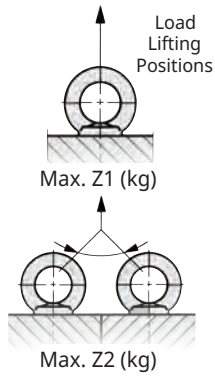

Lifting Eyebolt / DIN 580

Code: **G141**

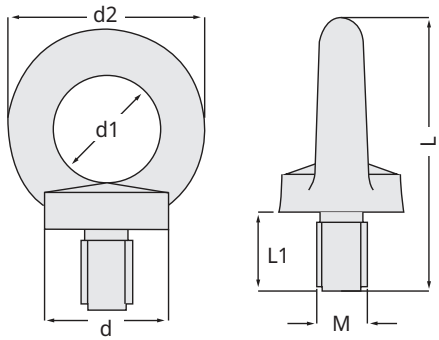

M x Thread	d	d2	d1	L	L1	Weight	Z1 Ton	Z2 Ton
M8 x 1.25	20	36	20	49	13	70 gr.	0.15	0.09
M10 x 1.50	25	45	25	63	17	100 gr.	0.23	0.15
M12 x 1.75	30	54	30	73.5	20.5	180 gr.	0.34	0.20
M14 x 2.0	30	54	30	73.5	20.5	200 gr.	0.46	0.30
M16 x 2.0	35	63	35	89	27	280 gr.	0.70	0.50
M18 x 2.5	35	63	35	89	27	330 gr.	0.90	0.60
M20 x 2.5	40	72	40	101	30	420 gr.	1.20	0.80
M24 x 3.0	50	90	50	126	36	830 gr.	1.80	1.25
M30 x 3.5	65	108	60	154	45	1.66 kg.	3.60	2.50
M36 x 4.0	75	126	70	182	54	2.65 kg.	5.10	3.60
M42 x 4.5	85	144	80	210	63	4.03 kg.	7.00	4.90
M48 x 5.0	100	166	90	236	68	8.80 kg.	8.60	5.90

Order: **G141.** M

Material: C15E Forged


Lifting Eyebolt: It is loaded only with forces making maximum 45° angle with vertical or circular plane, not allowed to other loadings however such liftings are oftenly unavoidable. Please plan selection of eyebolt suitable to safety bearing in advance (its safety is provided).



Lifting Sling

Code: **GPS**

(Double-layer, polyester)



Load Capacity	A (mm)	L - Sling Length (meter)							
		1	2	3	4	5	6	8	10
Purple - 1 TON	25	■	■	■	■	■	■		
Green - 2 TON	50	■	■	■	■	■	■	■	
Yellow - 3 TON	75		■	■	■	■	■	■	■
Gray - 4 TON	100		■	■	■	■	■	■	■
Red - 5 TON	125			■	■	■	■	■	■
Brown - 6 TON	150			■	■	■	■	■	■
Blue - 8 TON	200			■	■	■	■	■	■
Orange - 10 TON	250			■	■	■	■	■	■

Sling Clour Load	%100	%80	%200	%140 0 - 45°	%100 45 - 60°
	1 Ton	0.8 Ton	2 Ton	1.4 Ton	1 Ton
	2 Ton	1.6 Ton	4 Ton	2.8 Ton	2 Ton
	3 Ton	2.4 Ton	6 Ton	4.2 Ton	3 Ton
	4 Ton	3.2 Ton	8 Ton	5.6 Ton	4 Ton
	5 Ton	4 Ton	10 Ton	7 Ton	5 Ton
	6 Ton	4.8 Ton	12 Ton	8.4 Ton	6 Ton
	8 Ton	6.4 Ton	16 Ton	11.2 Ton	8 Ton
	10 Ton	8 Ton	20 Ton	14 Ton	10 Ton

Order: **GPS.** Load x Length

Safety coefficient of polyester sling in accordance with EN1492 -1 is 6 times of each type of slings. It is produced from 100% double layer polyester webbing. Reinforcement lifting eye - colour / load coded low coefficient of elongation - EN1492-1 : 2000.