


Group Locating - Centring Unit


Code: **G127**



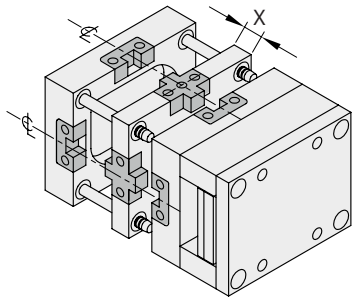


Oil grooves were created on the working surfaces of the products.

Material: 1.2510
Hardened: 52 - 54 HRC

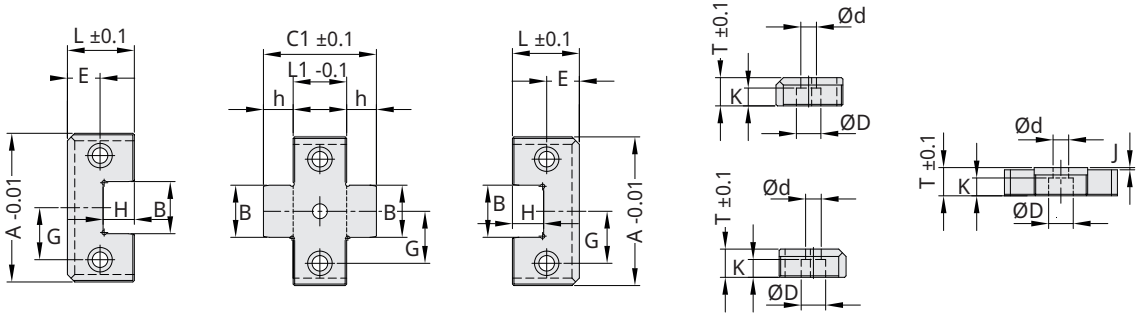

Mounting Mould Application




Order Code	A	X	B	C1	D	d	E	F	G	h
G127.5026	50	26	17	43	10.5	6.5	11	13	17	8.5
G127.5036		36		53				18		
G127.7526	75	26	25	54	16.5	10.5	18	13	25	14
G127.7536		36		64				18		
G127.10036	100	36	35	76	16.5	10.5	22	18	35	20
G127.10046		46		86				23		
G127.12536	125	36	45	76	16.5	10.5	22	18	42	20
G127.12546		46		86				23		

Order Code	H	J	K	L	L1	T	M	N	Dp	N1
G127.5026	9.5	1.5	8	21.5	26	16	M6	15	6	17
G127.5036					36					
G127.7526	15	1.5	12	36	26	19	M10	20	10	22
G127.7536					36					
G127.10036	21	1.5	12	45	36	19	M10	20	10	22
G127.10046					46					
G127.12536	21	1.5	12	45	36	25	M10	20	12	22
G127.12546					46					

Square Locating - Centring Unit

Code: **G128**











Oil grooves were created on the working surfaces of the products.

Material: 1.2510
Hardened: 52 - 54 HRC










Mounting
Mould Application



3D CAD - Formats: CATIA, STEP, IGES 3D, X_T


Order Code	A	G	E	M	L	T	N	B
G12838	38	11	7	M5	17	13	15	11
G12850	50	17	11	M6	21.5	16	15	17
G12875	75	25	18	M10	36	19	20	25
G128100	100	35	22	M10	45	19	20	35
G128125	125	42	22	M10	45	25	20	45

Order Code	C	d	D	h	H	J	K
G12838	30	5.5	9.5	8	9	1.5	5.5
G12850	30	6.5	10.5	8.5	9.5	1.5	8
G12875	50	10.5	16.5	14	15	1.5	12
G128100	65	10.5	16.5	20	21	1.5	12
G128125	65	10.5	16.5	20	21	1.5	12

Code: **G131**


Centring Unit - DLC Coated

The G131 series is suitable for rotational multi-component moulds.
Material: 1.2344 - DLC Coated / **Hardened:** 52 - 54 HRC






Order Code: **G131 - 1**

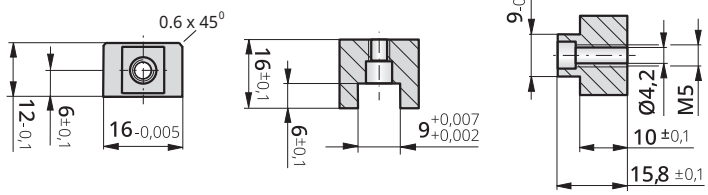

Note: Please use **M4 screws** for proper mounting.




Order Code: **G131 - 2**

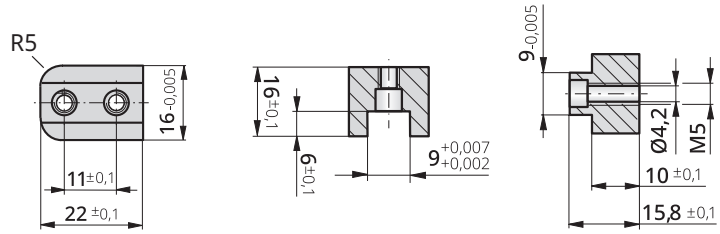

Note: Please use **M4 screws** for proper mounting.




Order Code: **G131 - 3**

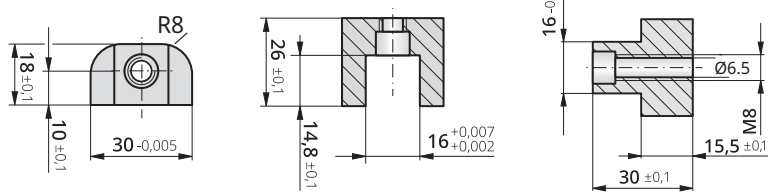

Note: Please use **M6 screws** for proper mounting.




Order Code: **G131 - 4**

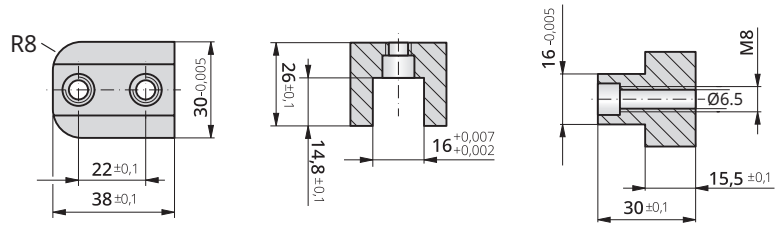

Note: Please use **M6 screws** for proper mounting.



Order Code: **G131 - 5**

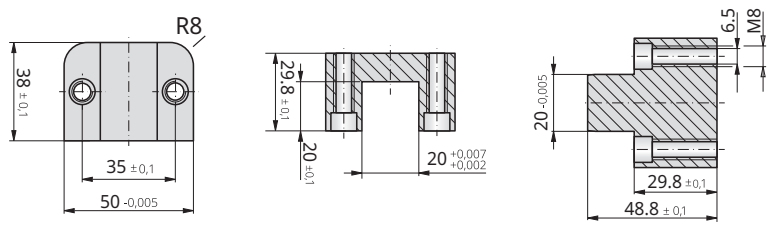

Note: Please use **M6 screws** for proper mounting.










Oil grooves were created on the working surfaces of the products.

Locating - Centring Unit


Code: **G129**








Mounting Example





Order Code	B	B1	B2	L1	L2
G1291	12.7	38.1	25.5	25.4	22.2
G1292	25.5	63.5	44.5	38.1	34.9
G1293	36.6	88.9	63.5	50.8	44.5


Order Code	L3	L4	L5	D2	D3	Screw
G1291	22	13.3	9.5	M6	9	M5
G1292	34.8	19.5	15.9	M8	11	M6
G1293	44.2	25.7	19	M12	18	M10


Material: 1.2510 / **Hardened:** 52 - 54 HRC


Note: This product is not suitable for the rotational (multi component) moulds. Please use "G131" products for the rotational multi component moulds.





Mounting Example

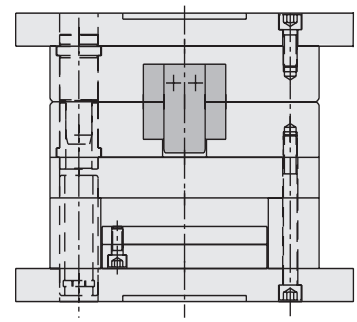









Code: **G130**

Square Locating - Centring Unit


Material: 1.2510 / **Hardened:** 52 - 54 HRC

Order Code	B1	L1	L2	A	B2	M	a1	b1	t1	t2	R
G130 16 20 20	16	20	20	22	45	M8	11	30	11.5	12	8
G130 16 20 40			40								
G130 30 26 40	30	26	40	35	60	M8	17.5	46	19.5	20	10
G130 30 26 63			63								
G130 48 36 32	48	36	32	46	100	M12	23	74	25.5	26	12.5
G130 48 36 50			50								
G130 48 36 63			63								
G130 48 36 80			80								
G130 77 56 50	77	56	50	60	150	M16	30	114	35.5	36	16
G130 77 56 71			71								
G130 77 56 100			100								




Locating - Centring Unit


Code: **G132**

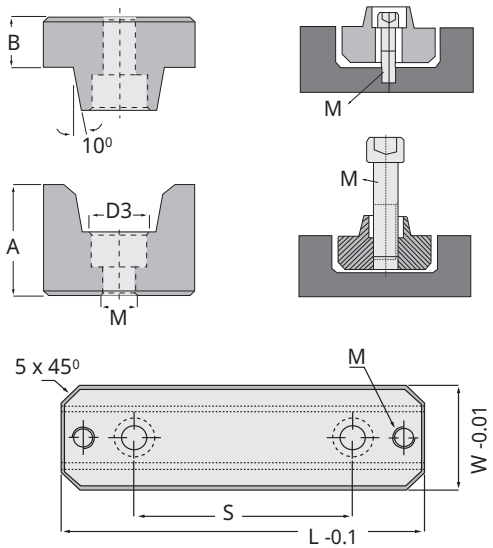



Oil grooves were created on the working surfaces of the products.



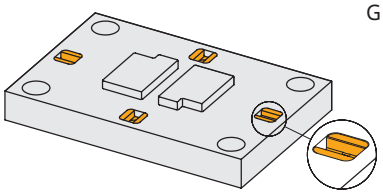

Mounting Example

W	L	A	B	G	S	D3	M
25	50	17.5	8	25.5	-	9.6	M5
30	100	22	10	32	60	11	M6
40	150	25	13	38	100	14	M8

Order: **G132** x W

Material: 1.2510
Hardened: 52 - 54 HRC

"WHY DO OUR BUSINESS PARTNERS PREFER TECINMAK PRODUCTS? "



1 "It reduces maintenance losses with lubrication grooves that reduce friction and extend lubrication periods"

2 "Easy traceability even after years with the brand and production tracking number"

3 "When mounted with appropriate criteria, 12.9 grade bolts that do not elongate are included with the product"

4 "The product has been 100% inspected by the TECINMAK CMM quality team"

5 "The product is stored and packaged in a climate-controlled stock area, in compliance with precise tolerance requirements"

