

Code: **G152**

Bar Lock System



Material: 1.2379 / **Hardened:** 58 - 60 HRC

Code: **G152K**


Bar Lock Slide Block



Material: 1.2842 / **Hardened:** 58 - 60 HRC

Code: **G152KL**

Bar Lock Guide Jaw

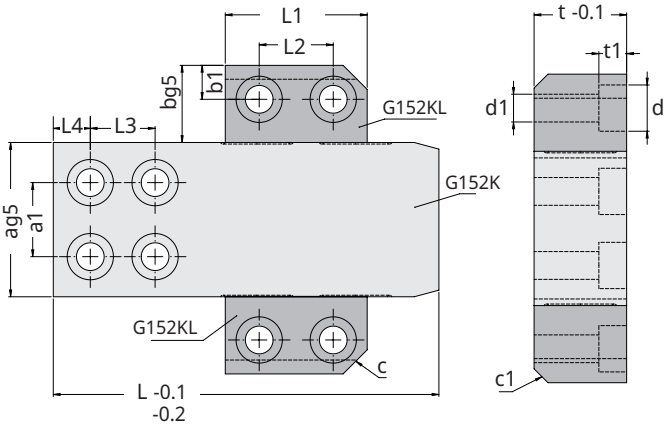

All parts, including part holder rings, are applied a thin layer of oil (fit for food industry) before all areas dry and get hardened. G152KL product can be used in group applications for each mould as 2 pieces and multi bar lock guide jaws can be used in different designs. There are 2 pcs jaws in 1 set.

It provides making selections among ready-made products for wide moulds with movable plates more than one for mould designers. During production, insert locks and only wipe outer surfaces. Please do not touch thin layer of lubrication in joints.


Order: **G152.** t x L

Order: **G152K.** a x L


Order: **G152KL.** L1 x b

a	a1	b	b1	c	c1	d	d1	L	L1	L2	L3	L4	t	t1	Screw
32	14	20	10	6	6	11	6.6	70 90 112	36	16	18	9	22	6.8	M6
50	24	25	11	8	5	15	9	90 125 150	46	24	21	12	30	9	M8
60	30	32	16	10	10	18	11	112 150 175	56	30	26	15	32	11	M10
80	44	35	16	10	10	18	11	112 150 175	56	30	26	15	35	11	M12
100	55	40	17	10	10	20	13.5	175 200 250	76	40	32	18	50	13	M12
120	75	45	20	12	12	20	13.5	200 250 300	86	50	35	20	65	13	M12


Bar Lock System Contents (G152):
G152K= 1 pcs. + G152KL= 1 set (2 pcs).




Wide Mould Applications

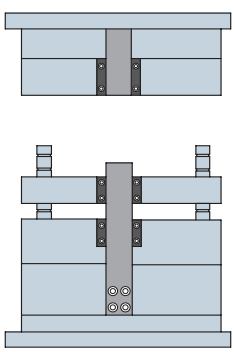

Stripper Plate Appications

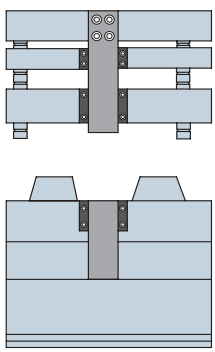

Triple Plate Applications

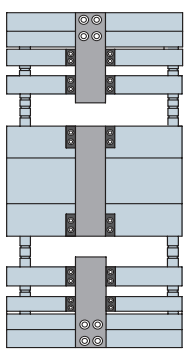

Sequence Mould Application