

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16


17

18


**Wear - Shim Plate****Code: G155**

(Core bases, for movable or fixed surfaces)

Clamping / locking loads occurred with the support of 1.2842 steel materials and heat treatment during injection and 2nd pressure are equally distributed to mould surfaces except cores, the mould surfaces are protected with this way. It can be used for both (movable and fixed) surfaces when necessary.

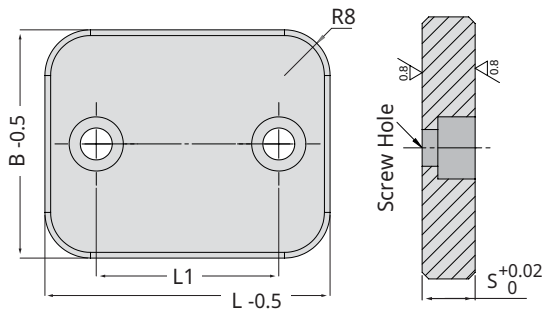


Order Code	B	L	S	L1	Screw Hole
G1552032	20	32	8.1	16	M5
G1552040		40	10.1	24	M5
G1552064		64	12.1	40	M5
G1552532	25	32	8.1	16	M5
G1552540		40	10.1	24	M5
G1552564		64	12.1	40	M5
G1553240	32	40	8.1	24	M5
G1553264		64	8.1	40	M5
G15532100		100	10.1	64	M6
G1554050	40	50	8.1	32	M5
G1554080		80	10.1	52	M6
G15540100		100	12.1	64	M6
G1555064	50	64	10.1	40	M6
G15550100		100	12.1	64	M6
G15550125		125	12.1	80	M6
G1556480	64	80	10.1	52	M6
G15564100		100	12.1	64	M6
G15564125		125	12.1	80	M6
G15564160	80	160	12.1	100	M6
G1558080		80	12.1	52	M6
G15580100		100	12.1	64	M6
G15580125		125	12.1	80	M6
G15580160		160	12.1	100	M6


Material: 1.2842 (Heat treated) / **Hardness:** 54 - 56 HRC**Wear - Shim Plate, Round****Code: G156**

(Core bases, for movable or fixed surfaces)


In injection mould designs: Injection pressure on mould separation surfaces should be distributed according to a predefined value. Thus, the mould separation surfaces are aligned correctly and the height differences are easily balanced thanks to innovative Güvenal products such as **G154 / G155 / G156**. 1.2842 steel 54 - 56 HRC hardened shim plates are ready to mount with 0.2 mm precision tolerances in embedded mounting holes and round - rectangular versions.

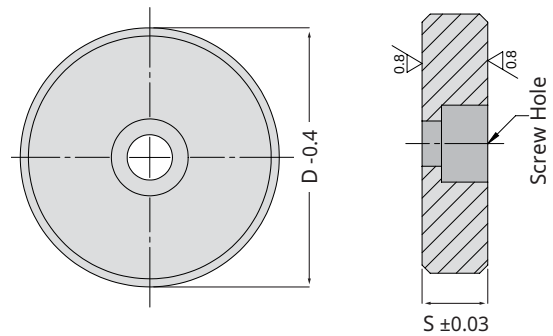

Order Code	D	S	Screw Hole
G15620	20	8.1	M5
G15625	25	8.1	M5
G15632	32	8.1	M5
G15640	40	10.1	M6
G15650	50	10.1	M6
G15664	64	12.1	M6
G15680	80	12.1	M6

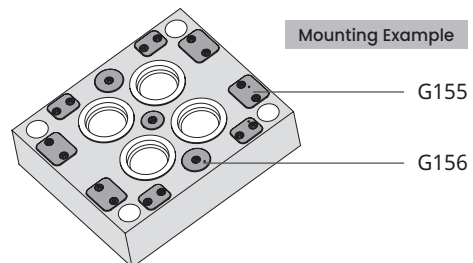**Material:** 1.2842 (Heat treated)
Hardness: 54 - 56 HRC**Mounting Example**

G155 / G156 - Usage: The necessary thickness should be correctly calculated during mounting. The final thickness is achieved by grinding back surface of the product when necessary. Plate to be used for the same core should be ground together. The parts to be used in mould locking should be ground together. The cleanliness and measurements of the mounting surfaces are important. Mounting hole sizes should be bigger than 0.2 (minimum) from one side. Hexagon socket head cap screws in 12.9 quality are used for connections. ***Connecting screws are provided separately**




Wear - Shim Plate (with oil grooves)

Code: **G154**


(Hard, heat-treated core bases, for movable or fixed surfaces)

Innovative wear and shim plates The difference of the mould separation surface can be easily offset by grinding back surface of the plate. It minimizes wearings due to friction with the heat treatment hardness and oil accumulated in oil grooves. used as sliding plate. Clamping / locking loads occurred with the support of 1.2842 steel materials and heat treatment during injection and 2nd pressure are equally distributed to mould surfaces except cores, the mould surfaces are protected with this way. It can be used for both (movable and fixed) surfaces when necessary.

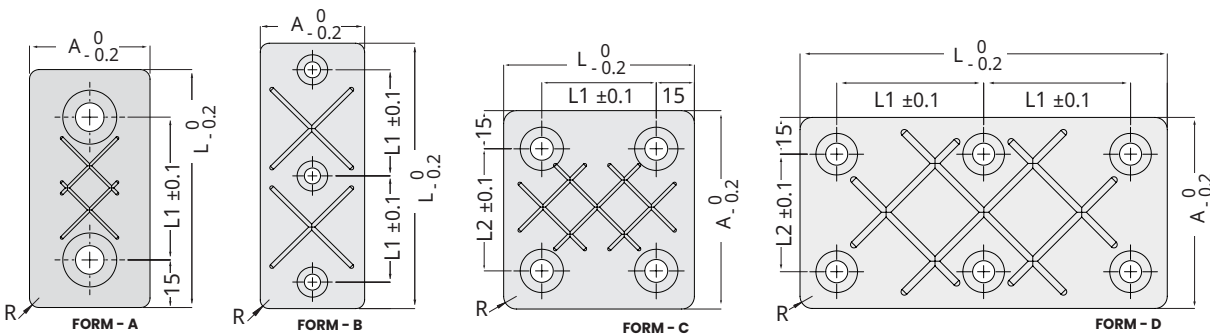

A	L	L1	L2	R	D	T	Form
18	50	20	-	4	6.5	7	A
	75	45					B
	100	70					
	150	60					B
28	50	20	-	4	9	7	A
	75	45					B
	100	70					
	150	60					B
38	50	20	-	4	9	7	A
	75	45					B
	100	70					
	150	60					B

A	L	L1	L2	R	D	T	Form
48	75	45	-	5	9	7	A
	100	70					B
	125	95					
	150	60					B
58	75	45	-	5	9	7	A
	100	70					B
	125	95					
	150	60					B
78	75	45	48	5	9	7	C
	100	70					D
	125	95					
	150	60					D



A: 18 / L: 50 - 75 - 100
FORM - A M6 x 20 - 2 Pcs.
A: 18 / L: 150
FORM - B M6 x 20 - 3 Pcs.

Countersunk Head
Screws with Hex-Socket

FORM - A M8 x 20 - 2 Pcs.
FORM - B M8 x 20 - 3 Pcs.
FORM - C M8 x 20 - 4 Pcs.
FORM - D M8 x 20 - 6 Pcs.

 Order: **G154**. A x L x T

 **Material:** 1.2842 (Heat treated)

Hardness: 54 - 56 HRC

Usage: The necessary thickness should be correctly calculated during mounting. The final thickness is achieved by grinding back surface of the product when necessary. Mounting hole sizes should be bigger than 0.2 (minimum) from one side.