



Code: **G152**


Bar Lock System



Material: 1.2379 / Hardened: 58 – 60 HRC

Code: **G152K**


Bar Lock Slide Block

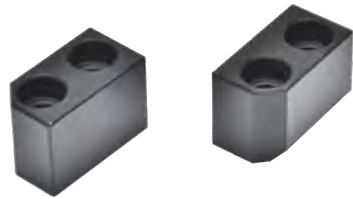

Material: 1.2842 / Hardened: 58 – 60 HRC

Code: **G152KL**

Bar Lock Guide Jaw

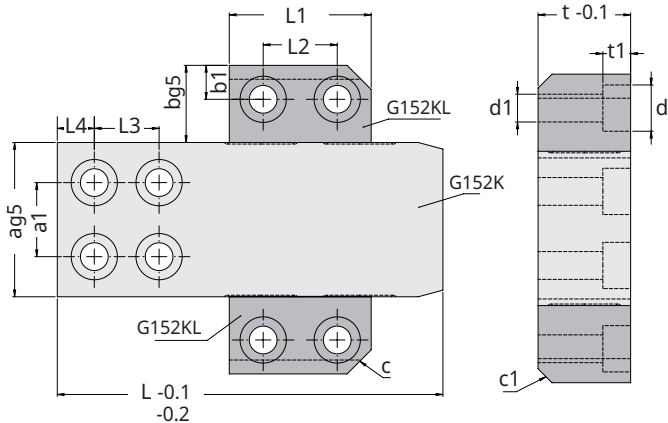

All parts, including part holder rings, applied a thin layer of oil (fit for food industry) before all areas dry and get hardened. G152KL product can be used in group applications for each mould as 2 pieces and multi bar lock guide jaws can be used in different designs. There are 2 pcs jaws in 1 set.

It provides making selections among ready-made products for wide moulds with movable plates more than one for mould designers. During production, insert locks and only wipe outer surfaces. Please do not touch thin layer of lubrication in joints.



Order:
G152. t x L




Order:
G152K. a x L




Order:
G152KL. L1 x b

a	a1	b	b1	c	c1	d	d1	L	L1	L2	L3	L4	t	t1	Screw
32	14	20	10	6	6	11	6.6	70	36	16	18	9	22	6.8	M6
								90							
								112							
50	24	25	11	8	5	15	9	90	46	24	21	12	30	9	M8
								125							
								150							
60	30	32	16	10	10	18	11	112	56	30	26	15	32	11	M10
								150							
								175							
80	44	35	16	10	10	18	11	112	56	30	26	15	35	11	M12
								150							
								175							
100	55	40	17	10	10	20	13.5	175	76	40	32	18	50	13	M12
								200							
								250							
120	75	45	20	12	12	20	13.5	200	86	50	35	20	65	13	M12
								250							
								300							


Bar Lock System Contents (G152):
G152K= 1 pcs. + G152KL= 1 set (2 pcs).

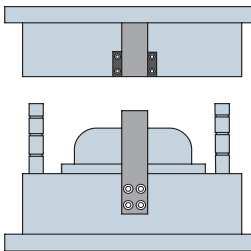


Wide Mould Applications



Stripper Plate Applications



Triple Plate Applications



Sequence Mould Application

Locating / Centring Units for Moulds