

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16


17

18

Mechanical Die Components



Code: **G64**
Locating Cone

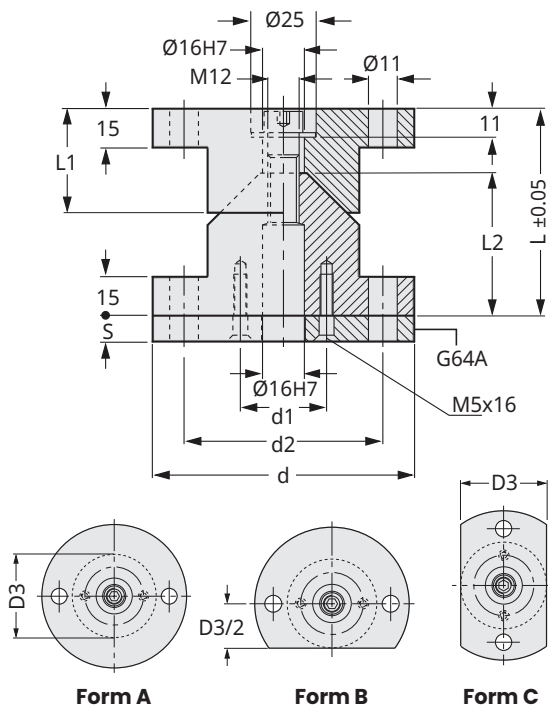

d	L	D1	D2	D3	L1	L2	t	Form
100	80	40.5	76	58	40	55	5.5	A
120	90	50.5	96	78	50	65		
100	80	40.5	76	58	40	55	5.5	B
120	90	50.5	96	78	50	65		
100	80	40.5	76	58	40	55	5.5	C
120	90	50.5	96	78	50	65		
100	80	40.5	76	58	40	55	10	A
120	90	50.5	96	78	50	65		
100	80	40.5	76	58	40	55	10	B
120	90	50.5	96	78	50	65		
100	80	40.5	76	58	40	55	10	C
120	90	50.5	96	78	50	65		
100	80	40.5	76	58	40	55	10.5	A
120	90	50.5	96	78	50	65		
100	80	40.5	76	58	40	55	10.5	C
120	90	50.5	96	78	50	65		



Order: **G64**. d x L x t x Form


Shim plates are with the unit in thickness (t) specified dimensions as a standard. Except this, other form(A - B - C) shim plates can be ordered upon request. Mounting screws are excluded.
Material: 1.7131 (16MnCr5) / Hardness: 60 - 64 HRC



Code: **G64A**
Shim Plate for
Locating Cone



(Custom-made products upon request)

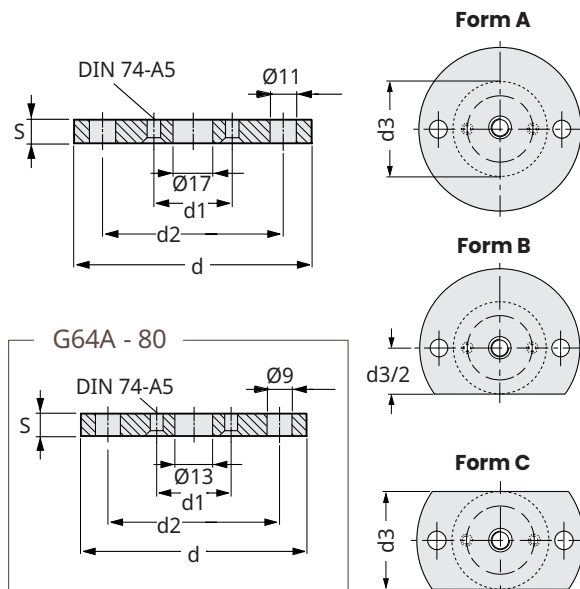

d	t	d2	d1	d3	Form
80	5	63	32	48	A
80	5.5	63	32	48	
80	5	63	32	48	C
80	5.5	63	32	48	
100	5.5	76	40.5	58	A
120	5.5	96	50.5	78	
100	5.5	76	40.5	58	B
120	5.5	96	50.5	78	
100	5.5	76	40.5	58	C
120	5.5	96	50.5	78	
100	10	76	40.5	58	A
120	10	96	50.5	78	
100	10	76	40.5	58	B
120	10	96	50.5	78	
100	10	76	40.5	58	C
120	10	96	50.5	78	
100	10.5	76	40.5	58	C
120	10.5	96	50.5	78	



Order: **G64A**. d x t x Form




Material: 1.0503 (CK45)

Note: Fixing screws will be provided separately.



Code: **G63**
Locating Cone - NAAMS
Shim Plate (upon request, **Form A - B**)
Reference: NAAMS G91

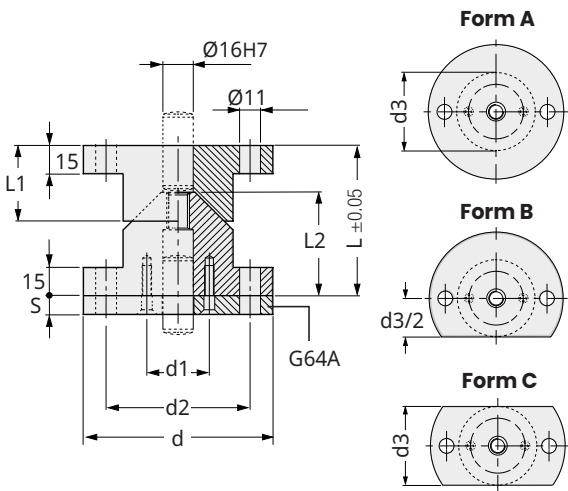


d	L	L1	L2	d1	d2	d3	S	Form
100	80	40	55	40.5	76	58	10.5	A
							10.5	C
							5.5	A
							10	A
							5.5	B
							10	B
							5.5	C
							10	C
120	90	50	65	50.5	96	78	10.5	A
							10.5	C
							5.5	A
							10	A
							5.5	B
							10	B
							5.5	C
							10	C

 Order: **G63**. d x L x S x Form



Code: **G46**
Locating Cone
Reference: WDX - 14 - 62 - 0175


(Custom-made products upon request)

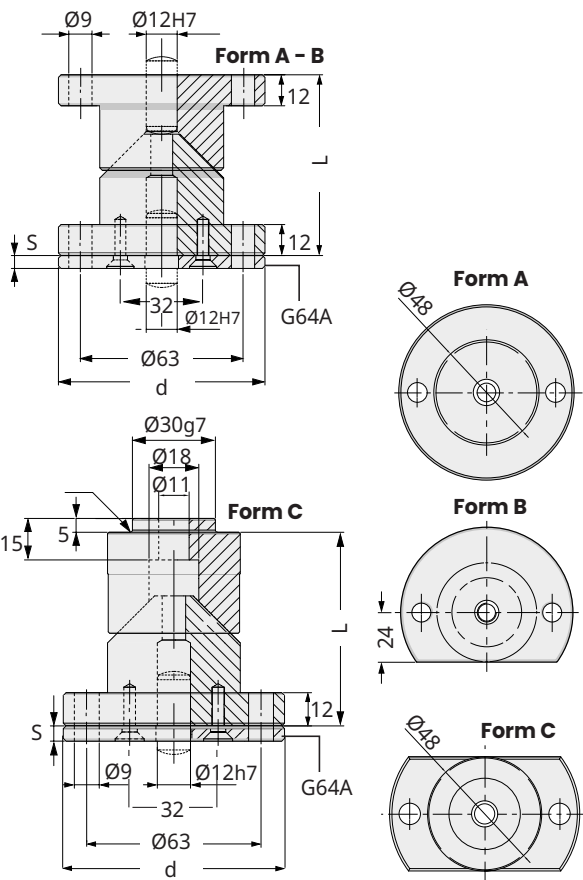

d	L	S	Form
80	70	5	A
80	70	5.5	
80	70	5	B
80	70	5.5	
80	70	5	C
80	70	5.5	

 Order: **G46**. d x L x S x Form

 **Material:** 16MnCr5 (CK45)
Hardened: 60 - 62 HRC

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18