

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

Mechanical Die Components

NEW



1 Material: 1.6511 / Screw: 8.8

2 Material: St 37


3 Material: CK45

4 Material: Polyurethane

Retainer Bolt

(Ref: FCA - FORD)

Code: **G169**

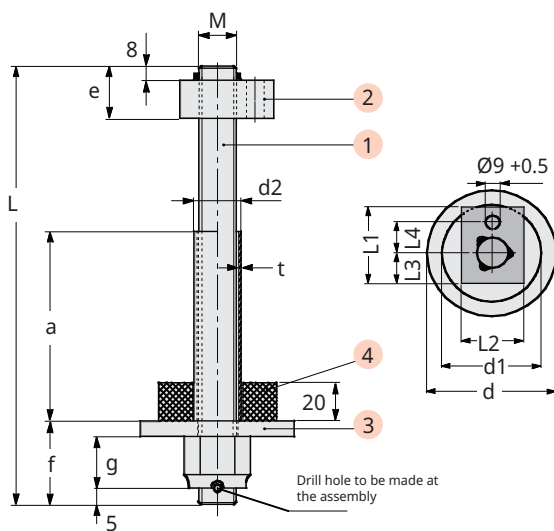

M	d	d1	d2	e	f	g
M16	65	50	22	28	30	19
M20	82	63	25	28	35	22
M24	105	80	30	28	42	27
M30	130	100	38	33	50	33

M	L1	L2	L3	L4	t	Max. Load kg.
M16	50	35	20	20	2	250
M20	50	40	20	20	2	450
M24	50	45	20	20	2.5	750
M30	63	50	28	26	2.5	1250

Please pay attention to the Max. Load.



Order:
G169. M x L x a


The lengths (L and a) are specified by the customer




Slide Stop Block

Code: **G97**

Reference: BMW - Ford - VW - Audi

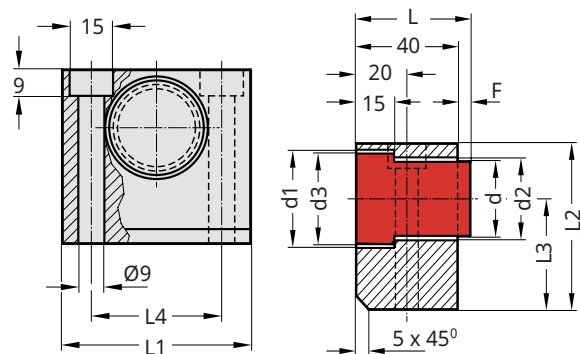

Note: Fixing screws (M8 cylinder head cap screws) should be provided separately.



Load N	d	d1	d2	d3	L	L1	L2	L3	L4	F
5200	27	35	30	34	45	65	60	40	45	5
9800	36	45	40	44	45	75	70	45	55	5



Order:
G97. L1




Material: CK45 Steel
Polyurethane 90 Shore



Slide Stopper

Code: **G97A**




d	d3	L
27	34	45
36	44	45




Order:
G97A. d

Slide stopper for is90 Shore. Used with slide stop block.



Code: **G99**

Cylinder Locating Block
(FCA Code: CNT_ST_01)

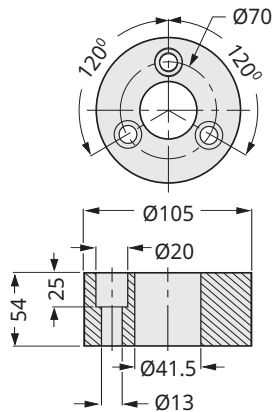

Material: 1.7131 (16MnCr5)
Hardness: 60 - 64 HRC




Order Code: **G99**



Code: **G99B**



Cylinder Locating Block
Reference: PSA

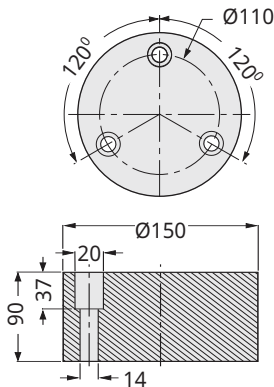

Material: 1.7131 (16MnCr5)
Hardness: 60 - 64 HRC



Order Code: **G99B**



Cylinder Stopping Block

Code: **G98**



Order Code	d1	Screw	d2	d3	h1	h2	L5
G98 40	40	M10	11	18	30 ~ 60	20	30 - 40
G98 60	60	M12	14	20	40 ~ 80	22	40 - 50
G98 80	80	M12	14	20	56 ~ 100	42	50 - 60
G98 100	100	M16	18	26	80 ~ 160	62	80
G98 120	120	M20	22	33	104 ~ 160	82	100
G98 150	150	M20	22	33	124 ~ 160	102	120



Material: 1.7131 (16MnCr5) / **Hardness:** 60 - 64 HRC



Note: Fixing screws should be provided separately.



Cylinder Stopping Block

Code: **G98B**

Reference: FCA

d	h
Diameter 80 mm	Thickness 25 mm
Diameter 80 mm	Thickness 30 mm
Diameter 100 mm	Thickness 25 mm
Diameter 100 mm	Thickness 30 mm
Diameter 120 mm	Thickness 25 mm
Diameter 120 mm	Thickness 30 mm



Order:
G98B. d x h



Material: 1.7131 (16MnCr5)
Hardness: 60 - 64 HRC

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17


18



Guide Code: **G67**

Guide - Hardened Code: **G67S**

(Ref: BMW - Mercedes-Benz - FCA - Ford - Opel - VW/AUDI)

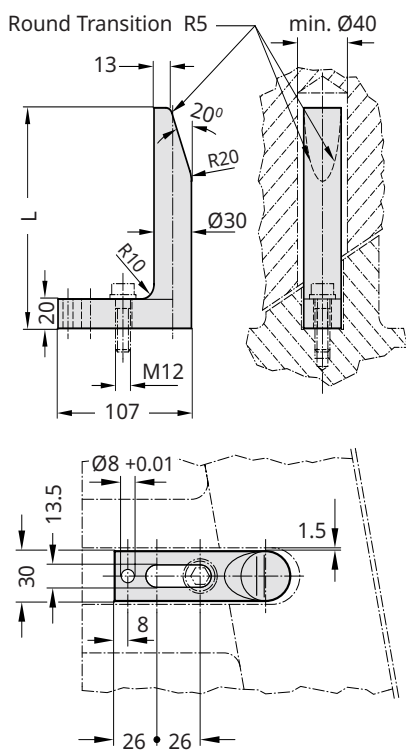

Order Code		L
G67 065	G67S 065	65 mm
G67 090	G67S 090	90 mm
G67 120	G67S 120	120 mm
G67 150	G67S 150	150 mm
G67 180	G67S 180	180 mm
G67 250	G67S 250	250 mm
G67 300	G67S 300	300 mm
G67 350	G67S 350	350 mm

Code: **G67** Material: CK 45 Forged

Code: **G67S** Material: CK 45 Forged
Hardened: 50 - 55 HRC


NEW



Guide for Sensor - Hardened

Code: **G68**


(Ref: BMW - FCA)

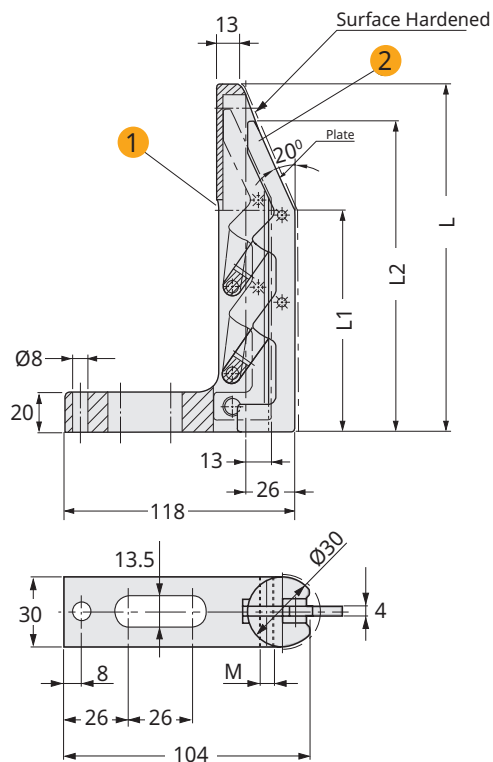

Order Code	L	L1	L2	M
G68 120A	120	78	113	M8x1
G68 120B	120	78	113	M12x1
G68 150A	150	90	130	M8x1
G68 150B	150	90	130	M12x1
G68 180A	180	114	160	M8x1
G68 180B	180	114	160	M12x1
G68 250A	250	114	160	M8x1
G68 250B	250	114	160	M12x1
G68 250C	250	184	230	M8x1
G68 250D	250	184	230	M12x1


Material: CK 60 Forged
Hardness: 58 - 60 HRC

Material: St37
Hardness: 58 - 60 HRC

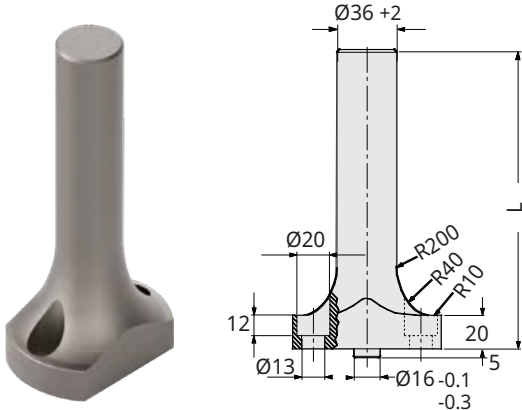

Air Pin VDI 3002

Code: **G69B**

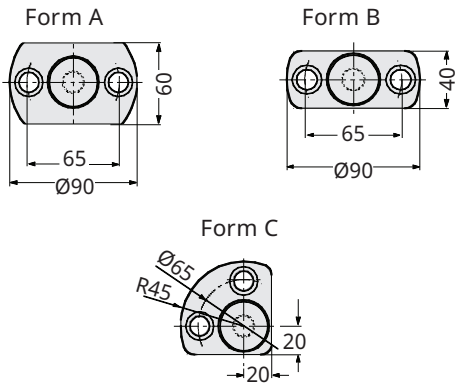


L	L	L
150 mm	215 mm	275 mm
155 mm	220 mm	280 mm
160 mm	225 mm	285 mm
165 mm	230 mm	290 mm
170 mm	235 mm	295 mm
175 mm	240 mm	300 mm
180 mm	245 mm	310 mm
185 mm	250 mm	320 mm
190 mm	255 mm	330 mm
195 mm	260 mm	340 mm
200 mm	265 mm	350 mm
205 mm	270 mm	360 mm



Material: CK 45
800 ÷ 1000 N / mm² Forged




Order: **G69B**. L x Form

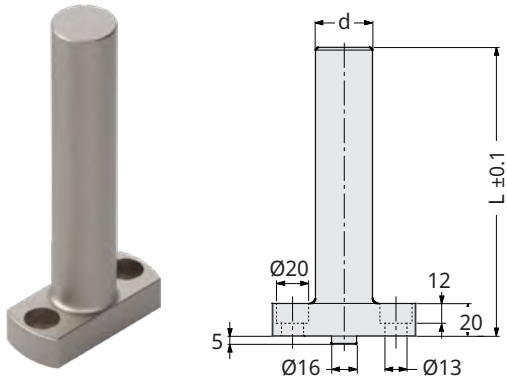

Air Pin

Code: **G69**

Referans: BMW B2 2615 12 / OPEL F33 15
VW AUDI 39D 638-1 / FORD WVDX 17 - 70M



d	d1	L1	L2	Max. Load	L
36	90	40	65	50	optional
46	100	50	75	70	optional




Material: CK 45
800 ÷ 1000 N / mm² Forged



Order: **G69**. d x L



The length (L) is specified by the customer

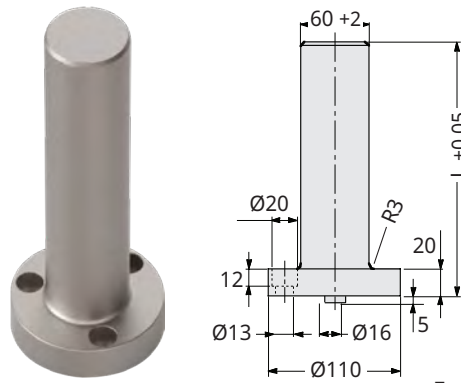

Air Pin

Code: **G69 - 1**

Form	Max. Load	L
A	80	optional
B	80	optional



Material: CK 45
800 ÷ 1000 N / mm² Forged



Order: **G69 - 1**. d x L

The length (L) is specified by the customer

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

Mechanical Die Components

1

NEW



Type 1
Steel Roller

Güvenal Order Code	VW/AUDI Code	Roller
ARSL-1-A	39V 1569/1	Steel
ARSL-1-B	39V 1569/2	
ARSL-1-C	39V 1569/3	
ARSL-3-A	39V 1569/20	Steel + Vulkollan
ARSL-3-B	39V 1569/21	
ARSL-3-C	39V 1569/22	

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18



Type 2
Plastic Roller (PP)




Type 3
Steel + Vulkollan Roller

Roller Strip Lifter


Code: **ARSL..**

Ref: VW/AUDI & FCA


FORM A

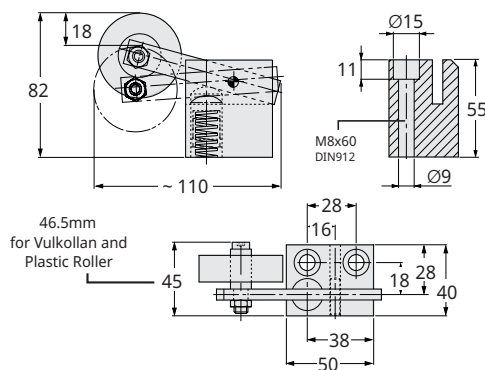

FORM B

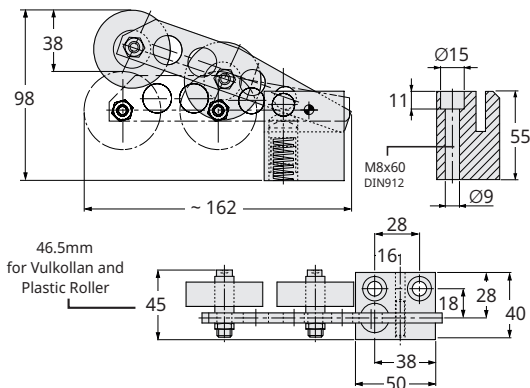


FORM C

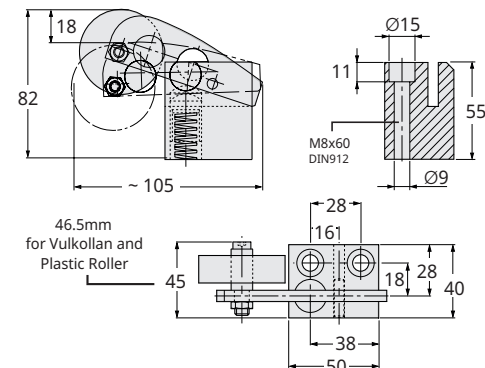

Order: **ARSL - Type - Form**

Order Example: **ARSL-1-A**


NEW

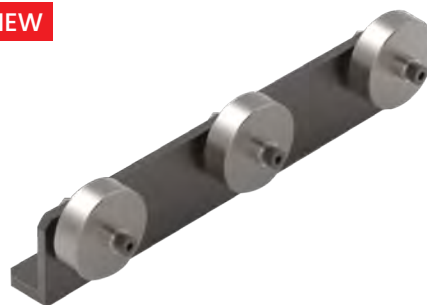


Roller Group

Order Code: **AFRG**

Ref: FCA

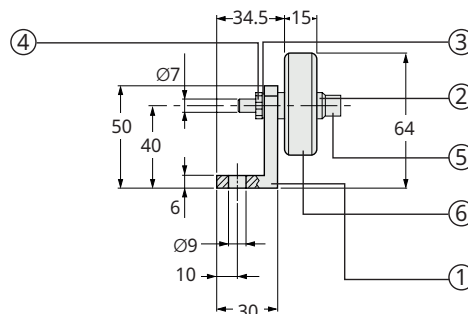

FORM A



① Material: St 37


② ③ Washers for M6

④ Nut for M6


⑤ Screw M6x40 DIN 912

⑥ Material: Steel Roller

FORM B

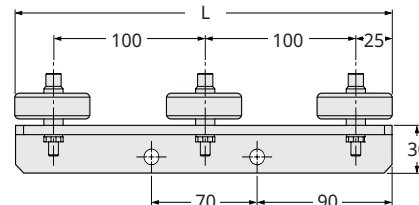

FORM C

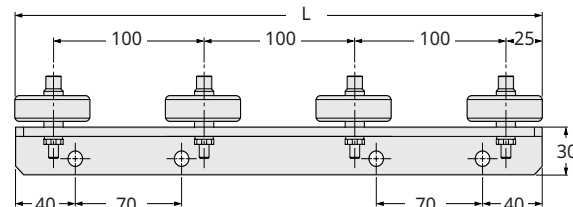

Order Code	Form	L	Max. Load (daN)
AFRG150	A	150	50
AFRG250	B	250	75
AFRG350	C	350	100


NEW

COIL SUPPORTS



Order Code: **ACS-S100**

Load (on roller)
Initial pressure:3.0 kgf
Final pressure: 5.0 kgf
Spring Constant
5.2 kgf. mm/deg

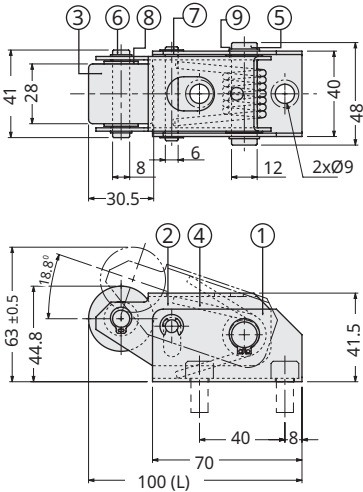


- ① Base
- ② Tilt Plate
- ③ Roller
- ④ Spring
- ⑤ Hinge Pin A
- ⑥ Hinge Pin B
- ⑦ Hinge Pin C
- ⑧ Washer
- ⑨ Shim



Order Code: **ACS-P140**

Load (on roller)
Initial pressure:3.3 kgf
Final pressure: 5.0 kgf
Spring Constant
18.84 kgf. mm/deg

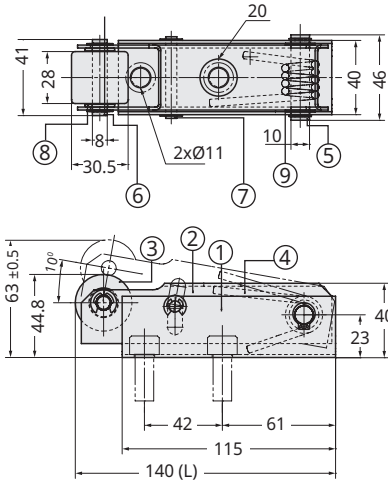

- ① Base
- ② Tilt Plate
- ③ Roller
- ④ Spring
- ⑤ Hinge Pin A
- ⑥ Hinge Pin B
- ⑦ Hinge Pin C
- ⑧ Washer
- ⑨ Shim



Steel Type


Order Code: **ACS-CTS**

Resin Type


Order Code: **ACS-CTJ**

Order Code	F Max	Spring Constant N/mm (kgf/mm)
ACS-CTS	16	8.43 (0.86)
ACS-CTJ		

Travel F is max. 16mm (durability range)

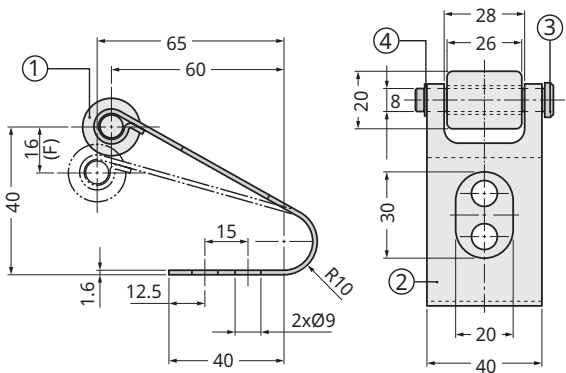

- ① Roller (Steel)
- ① Roller (Resin)
- ② Plate Spring
- ③ Hinge Pin
- ④ G Type Reatining Ring
- + 2pcs. M8x20 Bolt




Light Load Type

Order Code: **ACS-BTL**

Heavy Load Type

Order Code: **ACS-BTH**

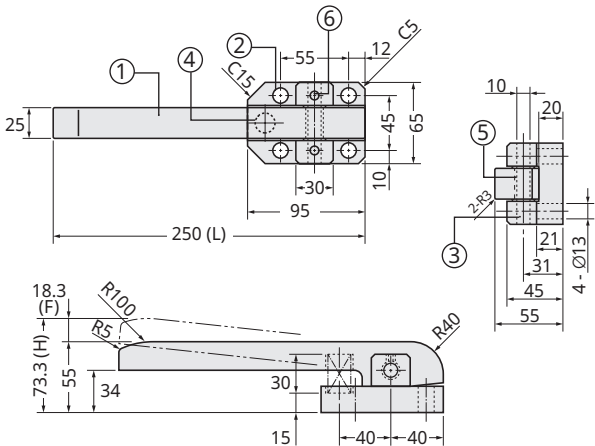

- ① Support Bar
- ② Base Plate
- ③ Pin
- ④ Spring
- ⑤ Bushing with Flange
- ⑥ Hex. Sock. Set Screw M6x8

Order Code	L	F	H	Spring Load (N)		Weight Kg.
				Initial Load	Final Load	
ACS-BTL	250	18.3	73.3	57	95	2.2
ACS-BTH				240	400	

