




Overvoltage protection

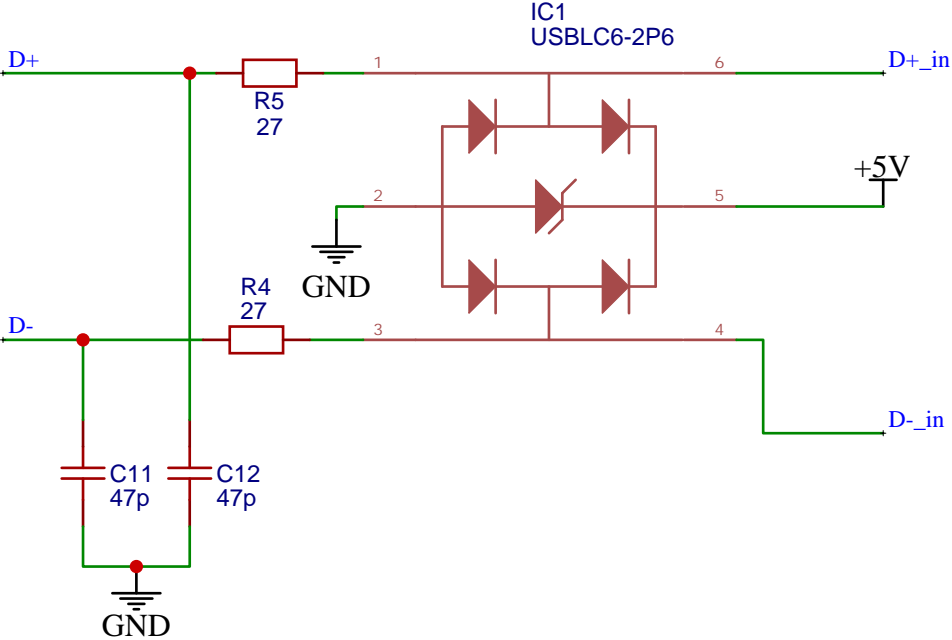


USB-UART

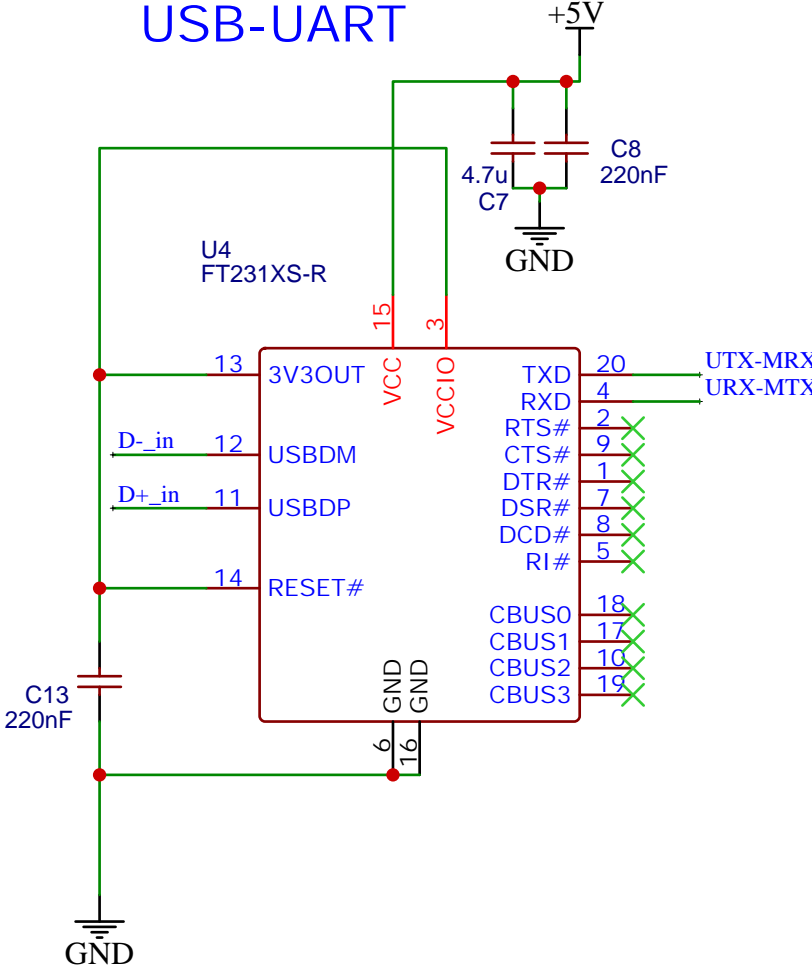


LDO Voltage Regulator

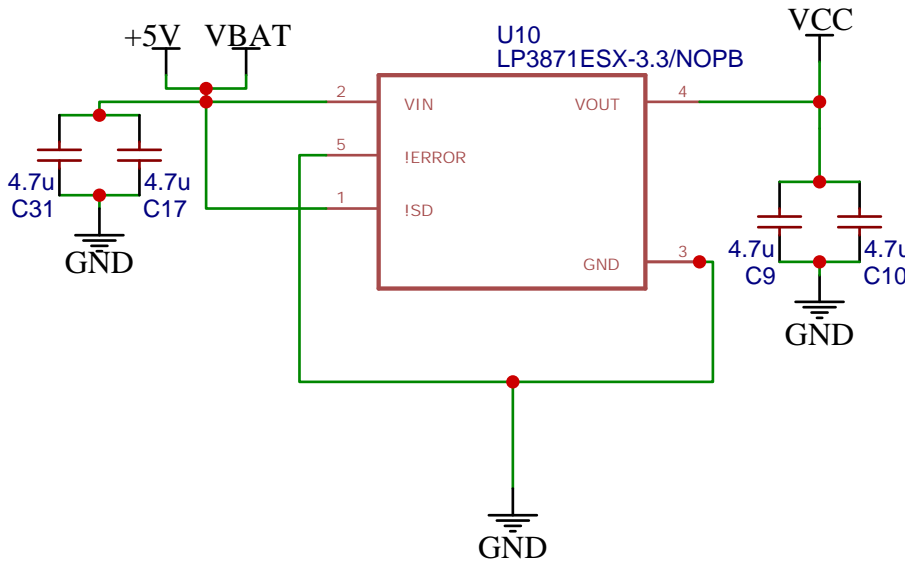


Battery Holder

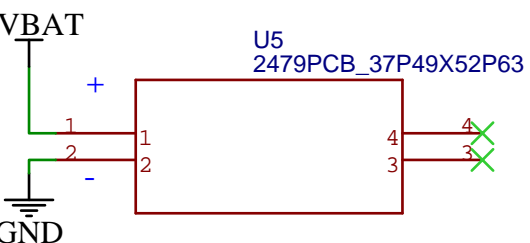

USB-C (female)

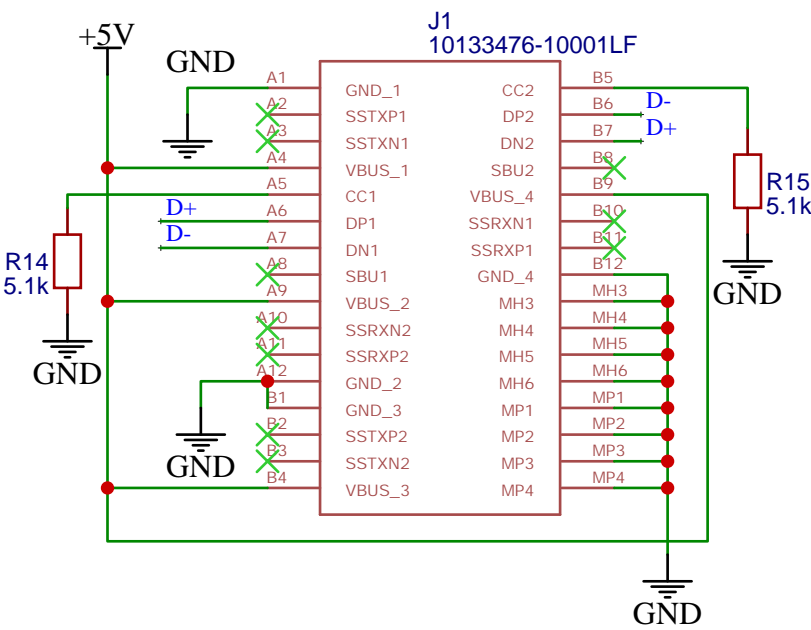

LoRaWAN

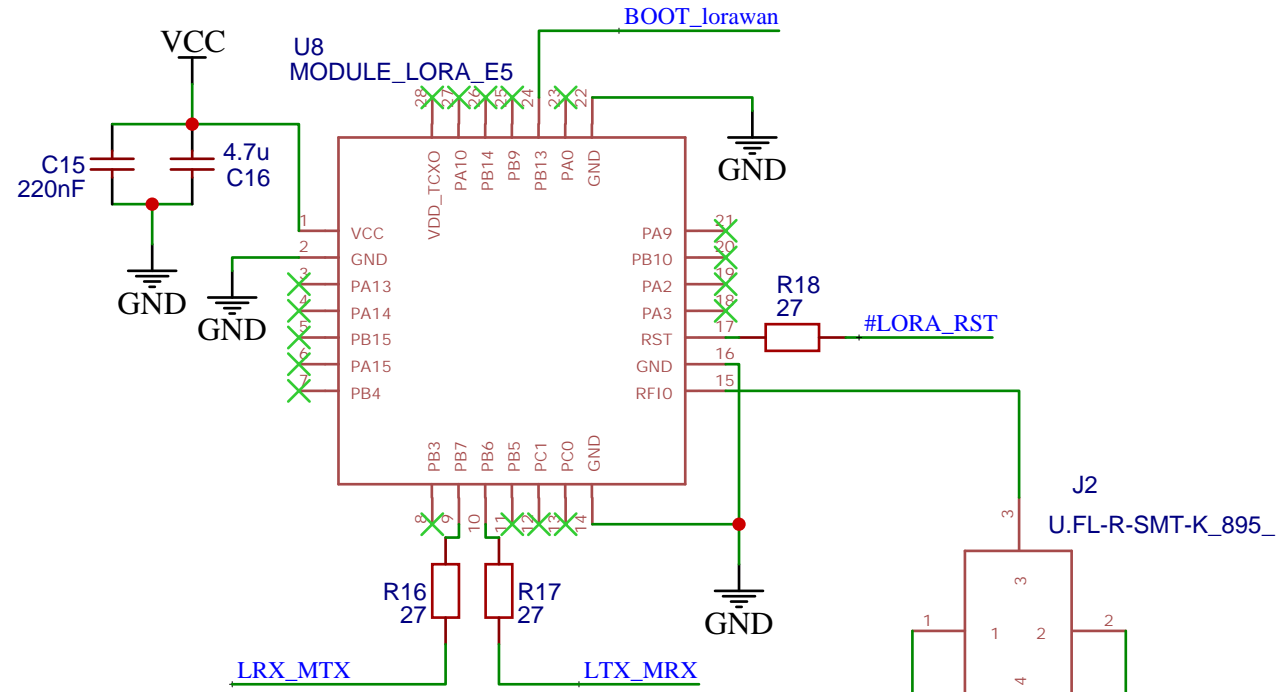

Air Quality Pressure Humidity Temperature



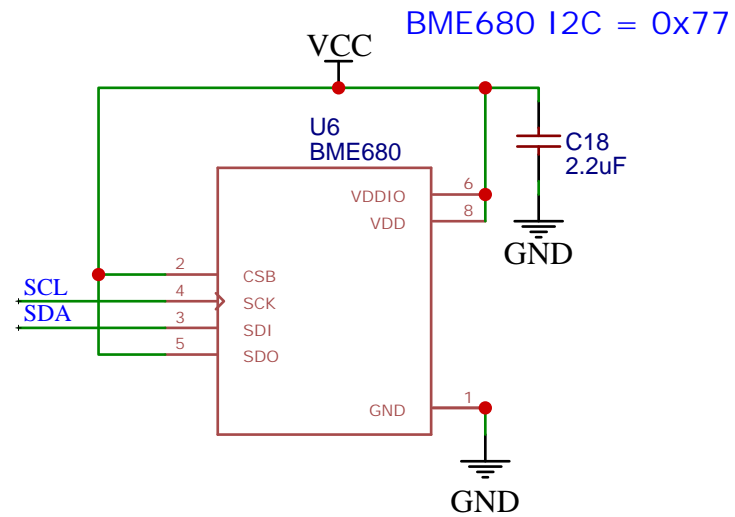



Photo-Resist

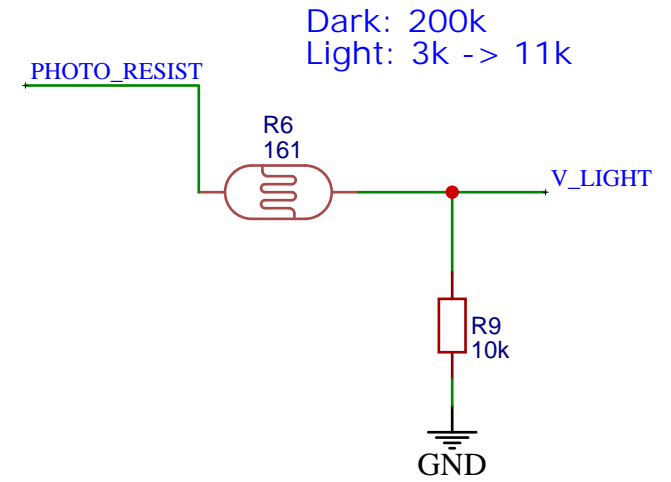

BOOT BUTTON LoRaWAN

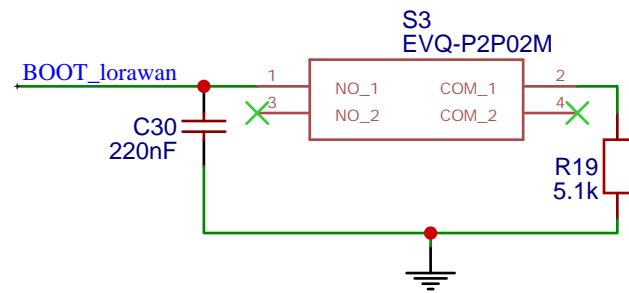


MEMS Microphone

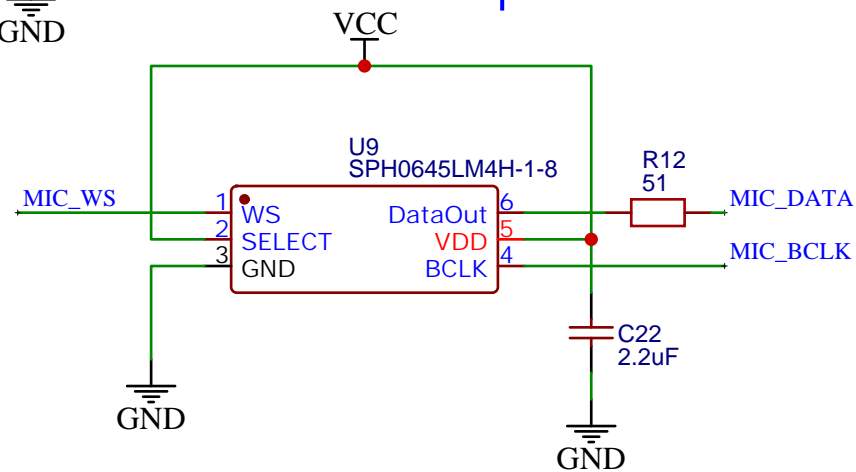


The use of both microphones is available through the WS pin.

Acceletometer

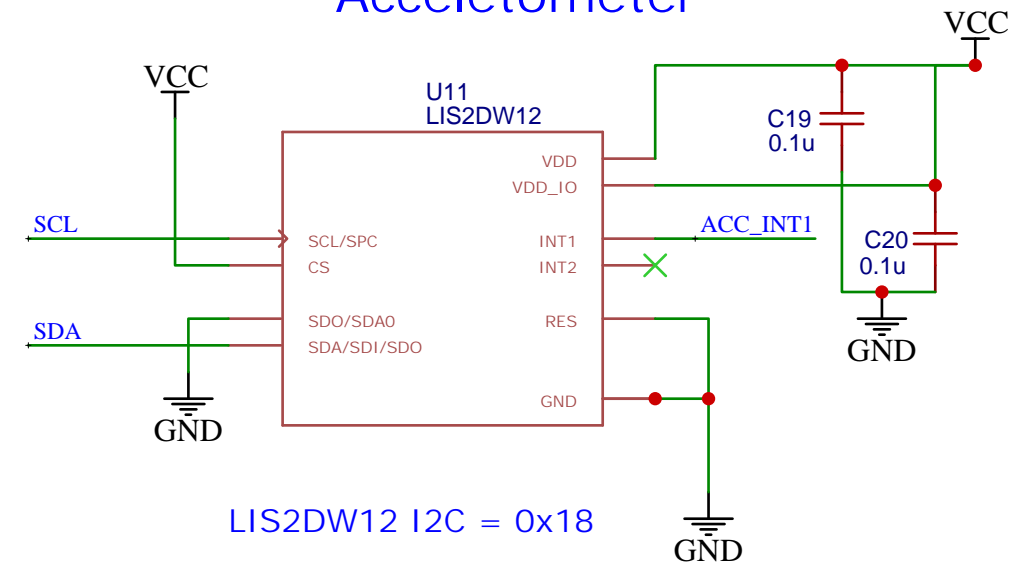

RGB LED

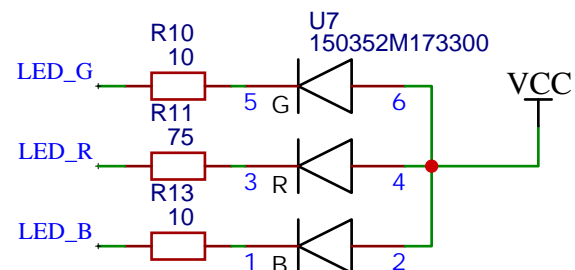

TITLE: Periferija		REV: 1.24
EasyEDA	Company: Fakulteta za Elektrotehniko	Sheet: 3/3
	Date: 2024-04-21	Drawn By: Ekipa HW