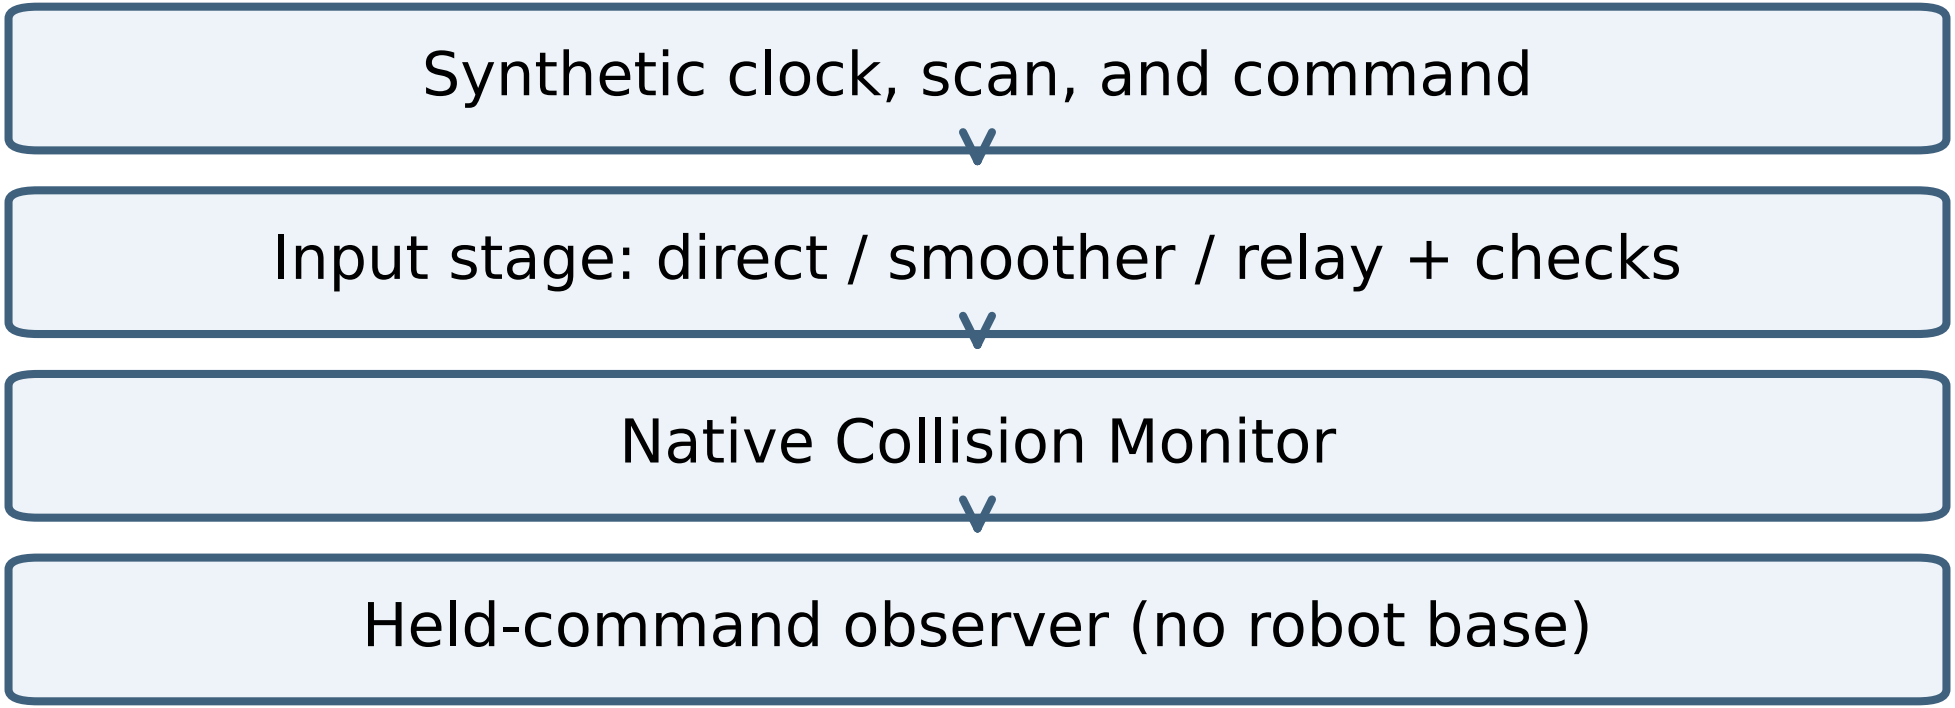
Synthetic clock, scan, and command
Input stage: direct / smoother / relay + checks
Native Collision Monitor
Held-command observer (no robot base)