

ALL IN ONE DEVICE



01 LOW SAFETY RISK

4mm thick tempered glass, anti-scratch, anti-static, low radiation

02 SUNLIGHT READABLE

The screen can withstand wide temperature ranges and is readable in direct sun light

03 PERSISTENT HIGH PERFORMANCE

No wearing parts, no consumables, the whole service life is up to 50,000 hours. The anti-light decay circuits ensures the panel's continuous high performance

04 ULTRA-HIGH-DEFINITION PICTURE QUALITY


The screen bodies are A-grade panels imported from some market-leading TV manufacturers

05 AVAILABLE IN VARIOUS SIZES

55"/65"/70"/84"/98" five sizes to choose from and all equipped with various display interface

06 EASY TO INSTALL AND TO MOVE AROUND

Apart from the standard wall mount, mobile stand is also available.

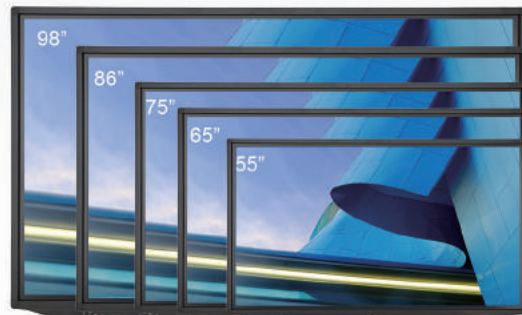

07 CORE TOUCH TECHNOLOGY

Up to 10 touch points and smooth touch control with no delay

08 USER FRIENDLY DESIGN

Equipped with interactive software and other functions such as auto calibration and automatic brightness setting

09 OPTIONAL OPS

Using the most advanced OPS module and Intel Dual-Core Processors to ensure high-performance





SPECIFICATION

Model	GK-880T/55S	GK-880T/65S	GK-880T/75S	GK-880T/86S	GK-880T/98S
Panel Type	LED A Grade				
Product Size	1290×802mm	1510.5* 926.5mm	1736.8×1015.3mm	1990*1201mm	2245.4×1321.8mm
Package Size	1520*245*965mm	1765*320*116mm	1990*350*1315mm	2200*360*1490mm	2525 * 435 * 1870mm
N.W./G.W.	38Kg/47Kg±1.5Kg	53Kg/65Kg±1.5Kg	62Kg/80Kg±1.5Kg	90Kg/109Kg±1.5Kg	162KG/214KG±1.5KG
Consumption	Standby≤1.0W, Normal≤130W	Standby≤0.5W, Normal≤180W	Standby≤0.5W, Normal≤320W	Standby≤0.5W, Normal≤500W	Standby≤0.5W, Normal≤540W
Resolution	FHD1920×1080	FHD1920×1080	UHD3840×2160	UHD3840×2160	UHD3840×2160
Voltage	100 V - 240 V, 50 - 60 Hz				
Speakers	10W*2				
Viewing Angle	178°				
Display Size	1238.7 x 709.5(mm)	1457.46 x 926.5(mm)	1649.66×927.94(mm)	1937*1108(mm)	2158.848×1214.352(mm)
Brightness	350cd/m²	350cd/m²	450cd/m²	400cd/m²	500cd/m²
Contrast Ratio	1200:1	1400:1	1200:1	1200:1	1300:1
Color	16.7M (8bit)				
Glass	4mm tempered glass				
Touch Technology	Modular design with easy maintenance,6 points touch(Standard),10 points touch(Optional)				
Touch Method	No need special tool,finger,pointer etc untransparent objects can write and operate directly				
Touch Time	Unlimited				
Response Time	8ms				
Response Speed	<15ms				
Input Interface	HDMI*5, VGA*1, PC AUDIO*1, COMPONENT*1, AV*1, TV/TV-MIC, USB*2, RS232*1				
Output Interface	HDMI*1, AV*1, TV-AUDIO*1, RS232*1				
Installation	Wall mounts(Standard), Mobile floor stand(Optional)				
Built In OS	Quad Core CPU, 1GBRAM 4GBROM, Android System	Quad Core CPU, 1GBRAM 4GBROM, Android System	Quad Core CPU, 2GBRAM 8GBROM, Android System	Quad Core CPU, 1GBRAM 4GBROM, Android System	Quad Core CPU, 1GBRAM 4GBROM, Android System
OPS PC	I3/I5 Processor, 4G Memory, 500G HDD, Built in wifi				
Shell Material	Aluminum				
Shell Color	Gray/Black				
Accessory	Wall mounts,Remote Controls,Power Cord,Pens,Guaranty Card				

(*Without prior notice if any specification or model change.)



GAOKE WHITEBOARD SOFTWARE

With Lessons preparation
and teaching mode



Gesture Recognition



Multi languages



Multi pen types for choose




Abundant teaching tools



Powerful teaching resources

GKBOARD SOFTWARE



Preschool Version



General Version



3 different operating modes: full screen mode,window mode and desktop mode