



Basic Heater Configurations


DESIGN “A”

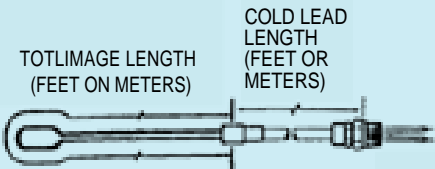


DESIGN “E”




DESIGN “B”

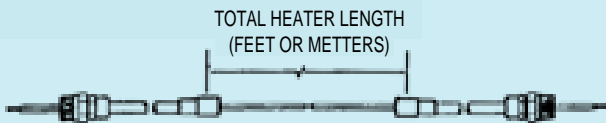


DESIGN “H”

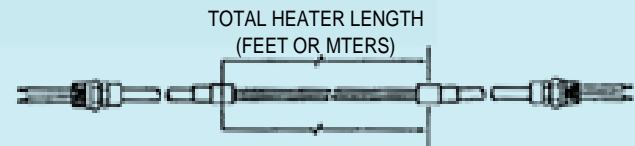

DESIGN “D”




DESIGN “H”

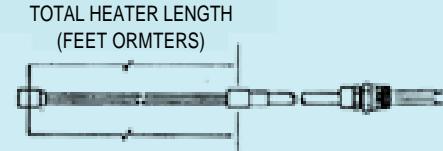


Resistance Correction Factor

POWER ON

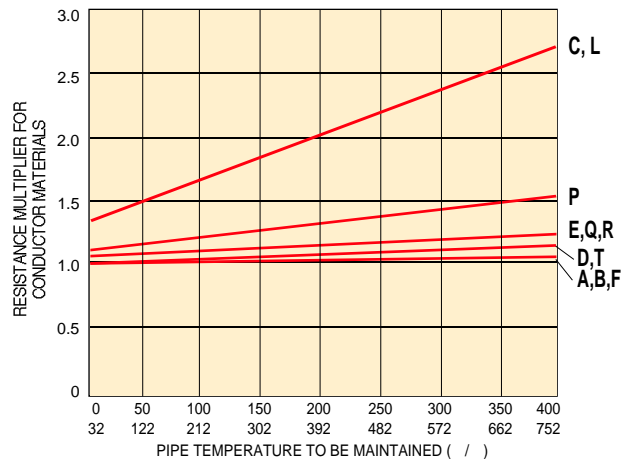

POWER OFF

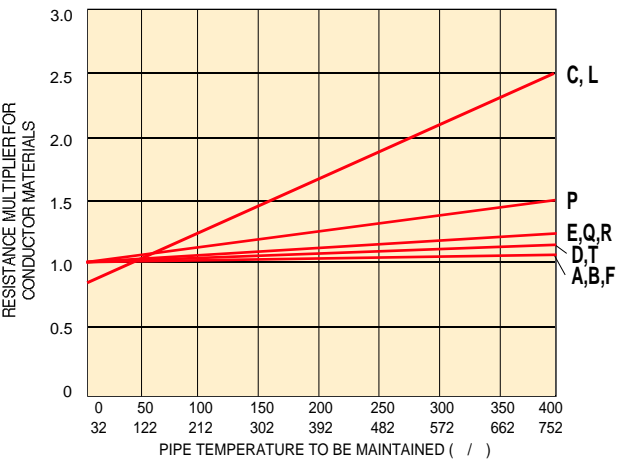

Alloy 825 Sheathed Cold Leads

Cold Size AWG	Design A,D,E,H,J		Design B	
	Max. Current (Amps)	Gland Size (N.P.T.)	Max Current (Amps)	Gland Size (N.P.T.)
14	15	1/2"	20	1/2"
12	20	1/2"	25	1/2"
10	30	3/4"	40	1/2"
8	50	3/4"	70	1/2"