Other Heating Cable

HEATED LINES SELF-REGULATING AND ANY REQUESTED LENGTH FROM THE REEL Type series ELH/sb

Application range

Analysis measuring technique up to 130 Transport of liquids and gases For the frost protection Environmental technique

Technical Date


Heating power: 13...60 W/m
Lengths: max...60m
Nominal diameters: 4...8mm

Operation temperatures : up to max. 130

Connection voltage: 230 V

Heating tape : self-requlating;

protective earthed

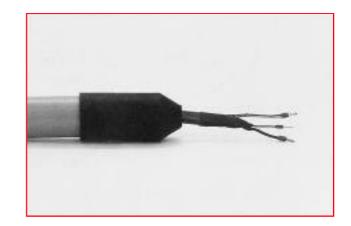

Various types

ELH/sb: with a fixed inner-hose of teflon (PTFE); ready for installation

ELH/sbA: with a fixed inner-hose of teflon (PTFE); not ready for installation - requested length

to be cut from the reel by the customer

Type addition ELH/ /i: exchangeable PTFE inner hose

Type addition ELH/ /T: outer protection "step-proof" metal corrugated hose with PVC-covering

Type addition ELH/ /iT :exchangeabel PTFE inner hose and outer protection step-proof

Table ELH/a

DN	inner hose		heated hose	heating power W/m approx.	
	i-ø mm	o-ø mm	o-ø mm approx.	frost protection	130
4	4	6	42	13	60
6	6	8	42	13	60
8	8	10	42	13	60

Table ELH / ai

DN	inner hose		heated hose	heating power W/m approx.	
	i-ø mm	o-ø mm	o-ø mm approx.	frost protection	130
4	4	6	42	13	60
6	6	8	42	13	60
8	8	10	42	13	60

Technical design

