

FOUR ICs / 16 ADDRESSES / 8 LED OUTPUTS


U1: DATA SHIFT


U3: ADDRESS MATCH


U4: OUTPUT STORAGE






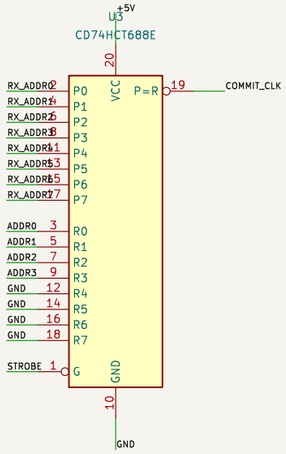




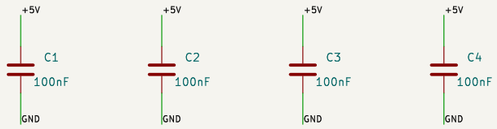






U2: ADDRESS SHIFT
















LED INDICATORS / about 1 mA each

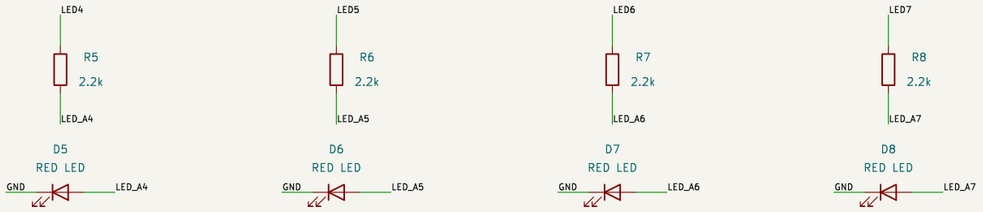

ADDRESS STRAPS: fitted = 1 / open = 0



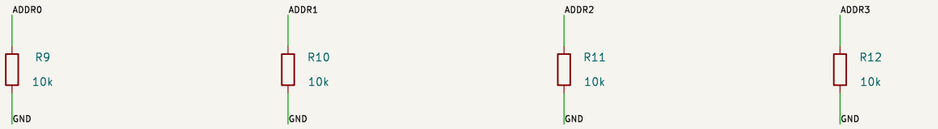

Shift address byte, then LED byte, MSB first. Keep STROBE HIGH while shifting.

Wait 100 us, STROBE LOW for 100 us, then HIGH to commit. No clocks while LOW.

Reset after power-up. HCT at regulated 5 V. No physical tests performed.

Not a power driver. Shared short local bus. Confirm purchased footprints.

Designed with OpenAI Codex / unbuilt logic prototype

finnandre.no

Sheet: /

File: Codex-Address-LED-4IC.kicad_sch

Title: Addressed LED board / 4 IC / 3 control signals

Size: A3	Date: 2026-10-12	**Rev: 1.0 prototype**
KiCad E.D.A. kicad-cli 7.0.6		Id: 1/1