

Data brief

Motion MEMS and microphone MEMS expansion board for STM32 Nucleo





Features

- ISM330DHCX MEMS 3D accelerometer (±2/±4/±8/±16 g) plus 3D gyroscope (±125/±250/±500/±1000/±2000 dps)
- IIS2MDC MEMS 3D magnetometer (±50 gauss)
- IIS2DLPC MEMS 3D accelerometer low power (±2/±4/±8/±16 g)
- IMP34DT05 MEMS digital omnidirectional microphone (-26 dBFS, ±3 dB sensitivity)
- DIL 24-pin socket available for additional MEMS adapters and other sensors
- Free comprehensive development firmware library and samples for all sensors compatible with STM32Cube firmware
- Available I²C sensor hub features on ISM330DHCX
- Compatible with STM32 Nucleo boards
- · Equipped with Arduino UNO R3 connector
- RoHS and WEEE compliant

Description

The X-NUCLEO-IKS02A1 industrial motion MEMS sensor expansion board is compatible with the Arduino UNO R3 connector layout.

It embeds the ISM330DHCX 3-axis accelerometer and 3-axis gyroscope, the IIS2MDC 3-axis magnetometer, the IIS2DLPC 3-axis accelerometer, the IMP34DT05 digital microphone.


The X-NUCLEO-IKS02A1 interfaces with the STM32 microcontroller via I²C pin, with the possibility of changing the default I²C port.

Product summary	
Motion MEMS and microphone MEMS expansion board for STM32 Nucleo	X-NUCLEO- IKS02A1
iNEMO inertial module: always-on 3D accelerometer and 3D gyroscope with digital output for industrial applications	ISM330DHCX
High performance, ultra- low-power 3-axis accelerometer for industrial applications	IIS2DLPC
High accuracy, ultra- low-power, 3-axis digital output magnetometer	IIS2MDC
MEMS audio sensor omnidirectional digital microphone for industrial applications	IMP34DT05
Application	Industrial Sensors

1 Schematic diagram





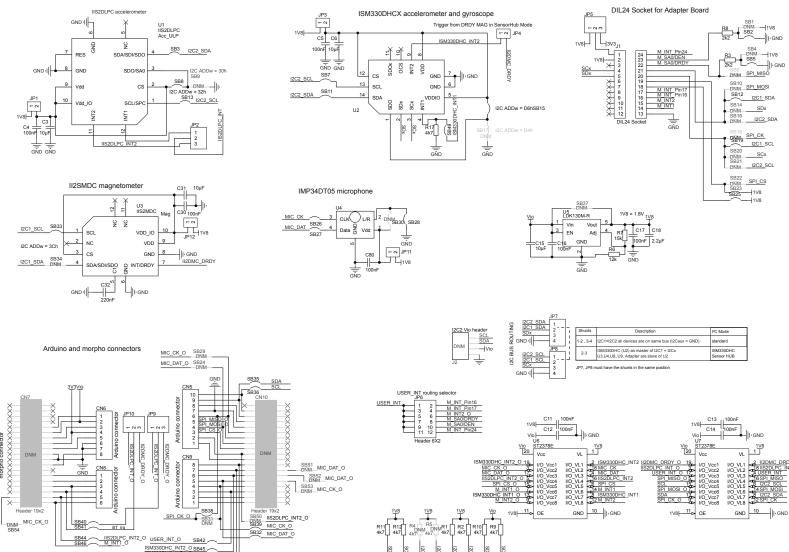



Revision history

Table 1. Document revision history

Date	Version	Changes
11-Nov-2019	1	Initial release.

DB4015 - Rev 1 page 3/4



IMPORTANT NOTICE - PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2019 STMicroelectronics - All rights reserved

DB4015 - Rev 1 page 4/4