


comparable projects parking ratio

Comparable projects across nations show, depending on goals set by the developer and structural properties that parking ratios per residential unit span from 0,5 to 0,8. The lower end of this range is typically not achieved by reducing parking alone, but by combining reduced parking supply with supportive mobility conditions: high-capacity public transport, walkable everyday services, regulated on-street parking, high-quality bicycle infrastructure, car-sharing, and centralized or priced parking.

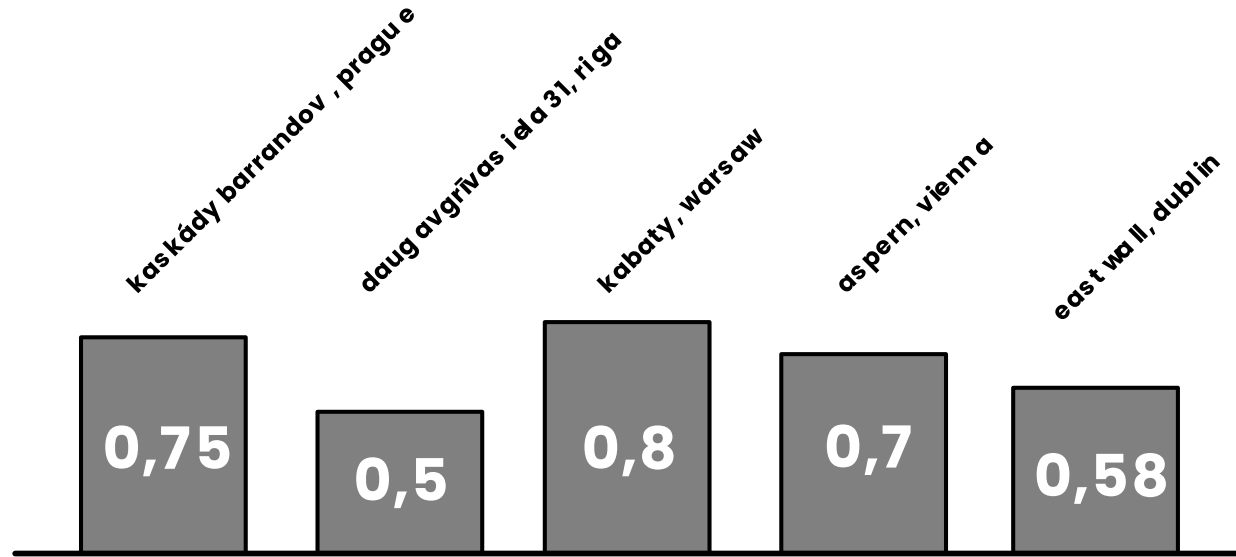

required parking space car ownership estimation

The influencing factors of the current amount of cars in Bratislava and its distribution is mapped in the chart and displays the probable heterogeneity throughout the bounds of the city districts.

Neighbourhood-context such as accessibility, proximity and urban forms correlates heavily with the car ownership of the residents in new, related quarter. Hence, the view on car ownership has to be seen rather in neighbourhood than in citywide context and combined with the planned properties of car ownership in the winter harbour area.

The model proposes ca. 300 cars per 1000 people which makes for about 480 cars per 1000 households in Ruzinov.

*numbers are estimated through indicators of car ownership p.p. such as residential density, demographics, accessibility of public transit and centres of importance and parking management.



influence-based parking space calculation

The „Stiftung Lebendige Stadt“ calculation tool was developed by scientists at the technical university of hamburg to find the expected amount of cars owned in a special area based on the varying factors influencing this feature.

Applying this tool to the numbers resulting from current plans, it shows that it predicts a low car ownership resulting in 0,24 parking lots per residential unit. While it is adjusted through Osnabrück and Hamburg, which reduces the transferability, it is explicitly designed to be used across europe.



0,8

Basisfaktor Quartierstyp

The area features a high quantity and density of residential use units



0,9

Factor local amenities

In 15 minutes from all areas of the project area a shop can be reached



0,8

Factor mixed use

Different types of facilities in- and outside of the district lead make up for a high mixed use



0,8

Factor bus

Much of the residential usage is accessible in close proximity to the bus stops situated around the project area



1,0

Factor rail

There is no rail-based connection other than the tram.



0,9

Factor travel time

The closeness of the Eurovea and city centre together with prior factors makes up for a good travel time



1,0

Faktor household size

A balanced size is prevalent



1,0

Factor income

Assumed is average to high income






**~ 0,4
parking lots per
residential unit**

Source: [Stiftung Lebendige Stadt 2021](#)

conclusions

The foregoing references indicate that less fewer parking spaces than residential units are appropriate, based on the circumstances and reference examples of implementation. To lower the overall cost of the construction of parking space as well as to reduce incentives to motorized private mobility, the recommendation is to lower the amount of parking space.

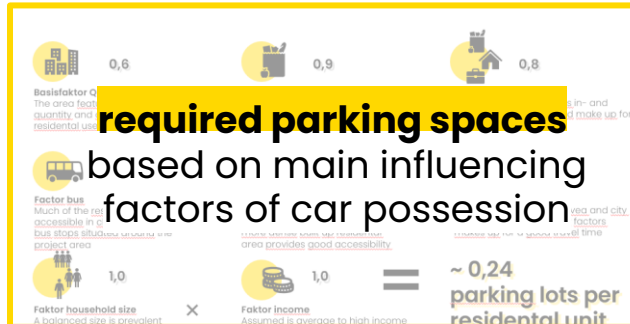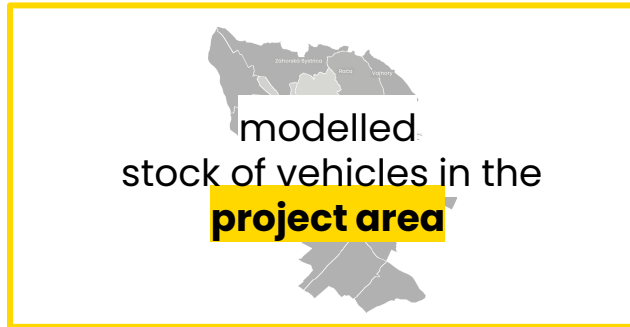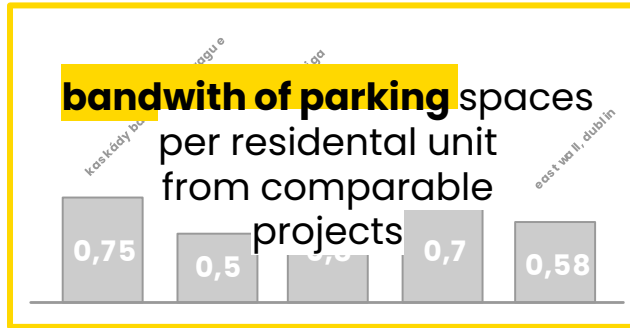

0,5-0,8

0,43

0,4