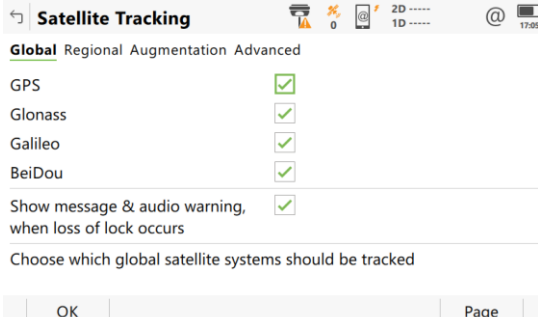
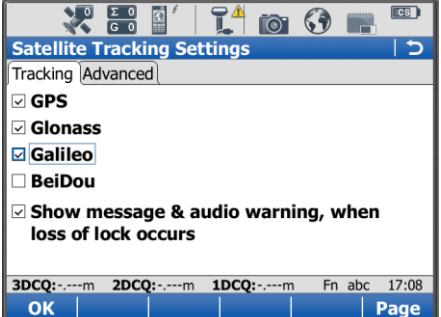


METROVAN Source Table selection for Captivate and SmartWorx Viva


Support Toll Free: (855) 414-9453

With the new addition of updated hardware with MetroVAN GNSS service, it has added the ability to handle MSM (Multi Signal Messages). With the combination of new hardware and firmware, there is the ability to support and track other GNSS constellation (GPS (Incl L5), GLO, GAL, BEI). If in doubt about compatibility, please check with Spatial Technologies to make sure you have the correct activations, codes, firmware and software.


The followings is a quick guide to change to using different mount which will allow for MSM tracking:

Captivate:	SmartWorx Viva:
To turn on the tracking on your controller, navigate to <Settings>, <GS Sensor>, >Satellite Tracking>, and check the signals you would like to track. If you do get an error "signal not support", please contact Spatial Sales rep for information on getting the option. 	To turn on the additional tracking on your GNSS, navigate to <Instrument>, <GPS settings..>, <Satellite Tracking>. If an error message pops up. Eg. <i>Signal not support</i>, it means the GS isn't support at this time. Please contact Spatial Tech Sales rep for more information. 

1. Tap on the Cellphone icon at the top tool bar and select the option <Server mountpt>

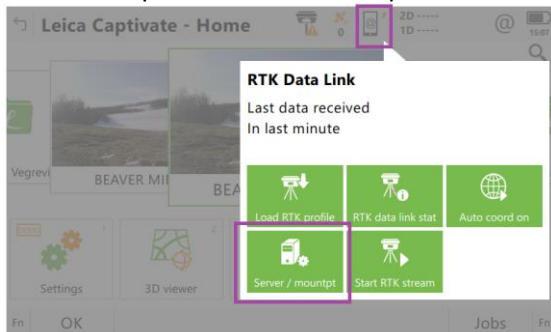


2. In Internet Port Connection, press F5 <Source> to load the "Source table"

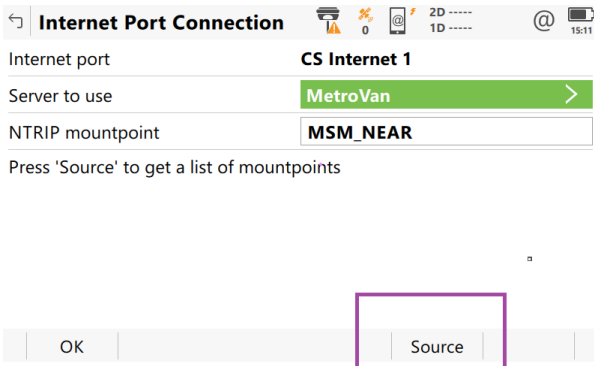


3. The NTRIP source Table will show all the available

1. Press the * key on the controller and select <Server/Mountpoint>

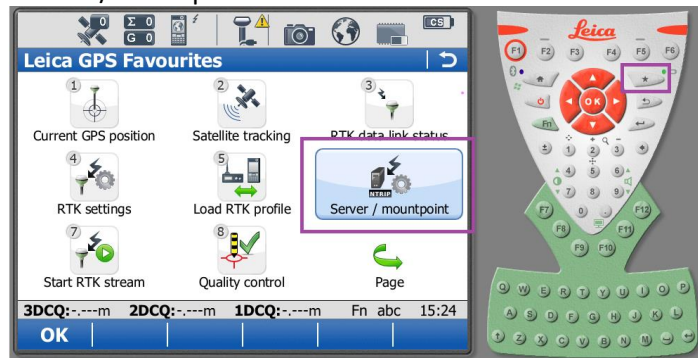

2. In the Internet Port Connection page, press F5 <Source> to load the Source Table

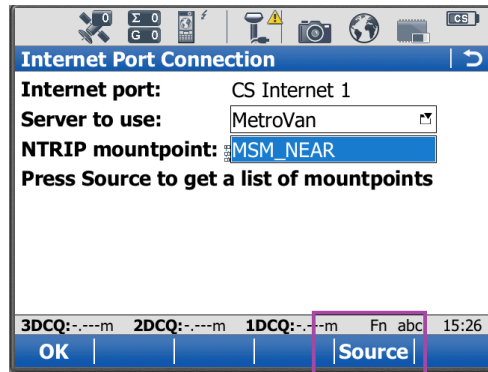


3. The NTRIP source Table will show all the available

METROVAN Source Table selection for Captivate and SmartWorx Viva

Support Toll Free: (855) 414-9453

mountpoints, it is recommended to choose either
<NEAR_MSM> or <IMAX_MSM>

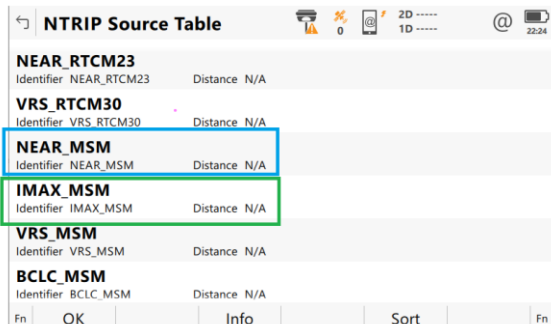


The screenshot shows the 'NTRIP Source Table' menu with several options. The 'NEAR_MSM' option is highlighted with a blue box, and the 'IMAX_MSM' option is highlighted with a green box. The 'VRS_MSM' option is also visible.

Mountpoint	Identifier	Distance
NEAR_RTCM23	NEAR_RTCM23	N/A
VRS_RTCM30	VRS_RTCM30	N/A
NEAR_MSM	NEAR_MSM	N/A
IMAX_MSM	IMAX_MSM	N/A
VRS_MSM	VRS_MSM	N/A
BCLC_MSM	BCLC_MSM	N/A

- Press OK to accept the change and navigate back to the menu and start the RTK as normal. (Tap Cellphone icon and select <Start RTK stream>

mountpoints, it is recommended to choose either
<NEAR_MSM> or <IMAX_MSM>

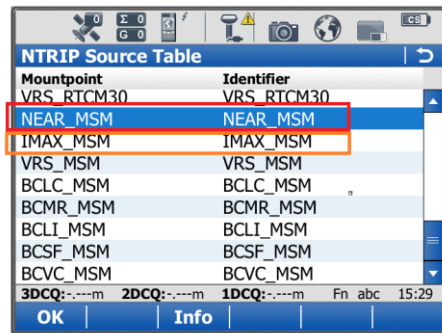

The screenshot shows the 'NTRIP Source Table' menu with several options. The 'NEAR_MSM' option is highlighted with a blue box, and the 'IMAX_MSM' option is highlighted with an orange box. The 'VRS_MSM' option is also visible.

Mountpoint	Identifier
VRS_RTCM30	VRS_RTCM30
NEAR_MSM	NEAR_MSM
IMAX_MSM	IMAX_MSM
VRS_MSM	VRS_MSM
BCLC_MSM	BCLC_MSM
BCMR_MSM	BCMR_MSM
BCLI_MSM	BCLI_MSM
BCSF_MSM	BCSF_MSM
BCVC_MSM	BCVC_MSM

- Press OK to accept the change and navigate back to the menu and start the RTK as normal. (Press "star" key and select <Start RTK stream>