

1986 — NEC Crystal mouse

In September 1986, NEC Corporation announced the EWS 4800 UNIX workstation. This computer was designed as a workstation for engineers to improve the efficiency of solving problems such as software development, computer-aided design, scientific and engineering calculations, and the collection and analysis of experimental data [1]. The computer was equipped with a graphical multi-window interface and a large 20-inch $1280 \times 1024 \times 256$ display. This powerful workstation came with the NEC Crystal Mouse (figure 1).



Figure 1: NEC Crystal Mouse

Like all early optical mice, this manipulator requires a reflective mat with a grid pattern. Unlike traditional Mouse Systems “mirror” mats with a grid of vertical and horizontal lines corresponding to two different wavelengths, the Nec Crystal Mouse’s metal mat has a dark, glossy surface. (figure 2).



Figure 2: NEC Crystal Mouse on its pad

The name of the mouse “Crystal Mouse” is highlighted on the upper side of the case with two triangular stylized mice in outlines and solid lines. The bottom side shows that this is an optical mouse (figure 3), which largely repeats the external design solutions of the Mouse Systems mice of the same period [2].



Figure 3: NEC Crystal Mouse, top and bottom views

In terms of size, the manipulator is an optical cursor control device typical for the 80s (figure 4).



Figure 4: NEC Crystal Mouse on a graduated pad with a grid step of 1 cm

In terms of ergonomics, the exterior of the Crystal Mouse has a strong industrial design. At the same time, a large number of corners and flat edges are partly compensated by rounded joints of the edges in the part of the body closest to the user and convex long buttons conveniently located within the reach of the fingers (figure 5).

The manipulator's internal structure is shown on figure 6, where you can see the original back-



Figure 5: NEC Crystal Mouse with a human hand model

lighting of the optical mouse, which differs from most optical mice of the 1980s, which copied Mouse Systems designs. Light emitted by LEDs is reflected off the mouse pad, then re-reflected by mirrors inside the mouse (a pair of rectangular blocks with a blue outer surface in the center of the structure), and finally emitted to a series of photodetectors, one located along the longitudinal axis and the other along the transverse axis. In the Nec Crystal Mouse, the LEDs (and, consequently, the mirrors) are located at the outer corners of the mouse pad's surface.

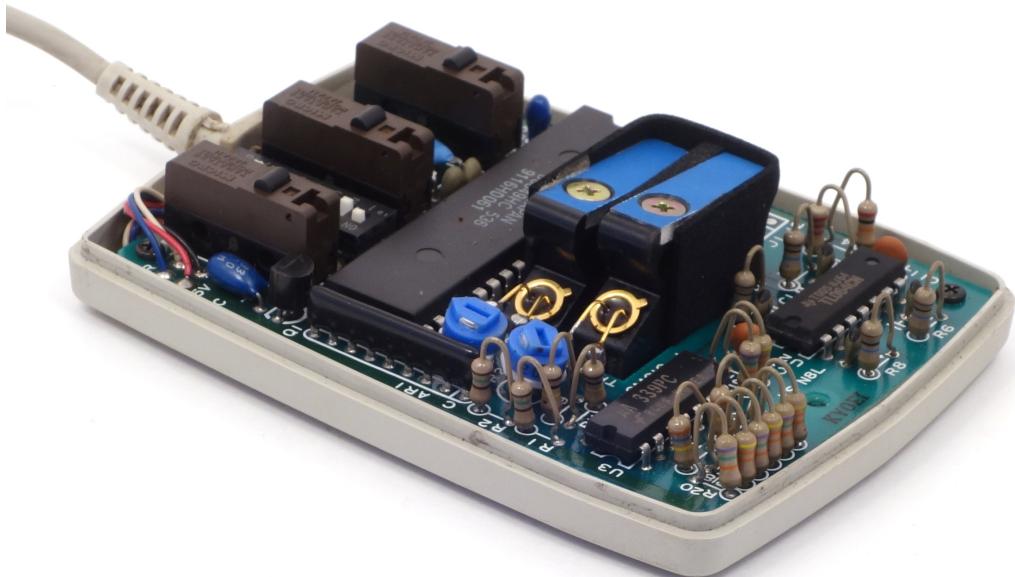


Figure 6: NEC Crystal Mouse disassembled

The mousepad is a metal plate with a translucent coating that conceals the grid. The longitudinal and transverse lines of the grid are at different heights, and their visibility depends on the angle of the optical axis relative to the surface. The figure 2 shows the Nec Crystal Mouse on a mousepad from a later mouse of similar design, the Kokuyo EAM-102; as can be judged from the photograph in [1], the original Nec mousepad was larger and likely had a lower grid resolution.

Also, the figure 6 allows us to conclude that the mouse is connected to the computer via a type of serial interface (this is evidenced by its cable, which consists of four wires, of which, according to the markings on the printed circuit board, two are responsible for receiving and transmitting data bits, and two provide power).

References

- [1] NEC EWS4800 <http://museum.ipsj.or.jp/en/computer/work/0003.html>
- [2] Graphics NEC EWS4800 <http://www.cs.ce.nihon-u.ac.jp/facility/exp-gazo.html>

