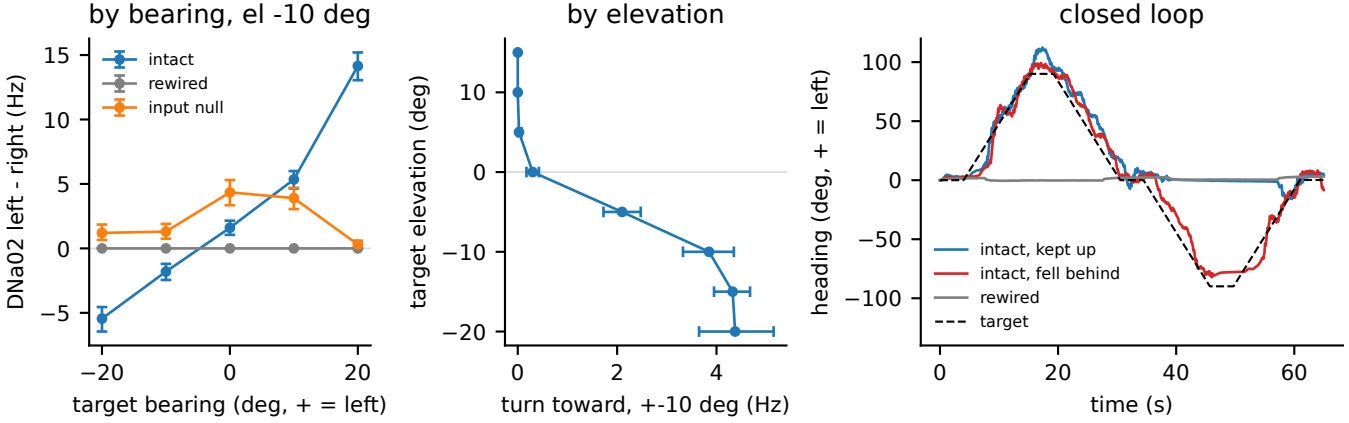
by bearing, el -10 deg
DNa02 left - right (Hz)
15
10
5
0
−5
intact
rewired
input null
−20
0
20
target bearing (deg, + = left)
by elevation
target elevation (deg)
10
0
−10
−20
0
2
4
turn toward, +-10 deg (Hz)
closed loop
heading (deg, + = left)
100
50
0
−50
−100
intact, kept up
intact, fell behind
rewired
target
0
20
40
60
time (s)