

Automatic Verification and Validation of Automatically Generated Simulation-Based Digital Twins for Discrete Material Flow Systems

Author: Daniel Fischer

Supervisor: Prof. Christian Schwede

Program: Research Master Data Science

Institution: Hochschule Bielefeld (HSBI)

Submission Date: April 2, 2025

Abstract

This thesis investigates the application of Digital Twins within discrete material flow systems, a key component of Industry 4.0. It reviews the progression from Digital Models and Digital Shadows to fully realized Digital Twins that integrate real-time data, simulation, and control mechanisms. To learn these Digital Twins from data enables companies to reduce twin creation and updating efforts. These gained advantages would be made obsolete if the validation and verification of such twins were performed manually involving experts. To address this problem, this research proposes a data-driven framework for automated verification, validation, and uncertainty quantification of simulation-based digital twins. Leveraging object-centric event logs and advanced machine learning techniques, the framework aims to seamlessly integrate digital simulation with real-world data. This approach ensures that the resulting Digital Twins maintain high fidelity and robustness by continuously benchmarking their performance against operational metrics. The framework is evaluated via a comprehensive case study examining its effectiveness in enhancing process efficiency and predictive precision.

Keywords: Digital Twins, Automated VVUQ, Process Mining, Machine Learning, Discrete Material Flow Systems.

Contents

List of Abbreviations	6
1 Introduction	8
1.1 Initial Situation	8
1.2 Problem	11
1.3 Objective	12
1.4 Structure and Methodology	13
2 Theoretical Foundation	16
2.1 Discrete Material Flow Systems and Simulation . . .	16
2.1.1 Basic Concepts	16
2.1.2 Comparing DMFS	17
2.1.3 Production Planning and Control	18
2.1.4 Relevant KPIs and Metrics	19
2.2 Digital Twin: Definition and Concepts	21
2.2.1 Types of Digital Twins	22
2.2.2 Data-Driven Digital Twins	23
2.3 Process Mining and Event Logs	25
2.3.1 Core Concepts	26
2.3.2 Object-Centricness in Process Mining	28
2.3.3 Process Mining as Enabling Technology	30
2.4 VVUQ in the Context of Simulation-Based Digital Twins	31
2.4.1 Development process of VVUQ Concepts	31
2.4.2 VVUQ for Automatically Generated Models	33
2.4.3 Traditional versus Machine Learning-Based Approaches	35
2.4.4 Modern VVUQ in the Context of SBDT	38

3	Framework Design	—45
3.1	Requirements Engineering	45
3.2	An Automated VVUQ Framework for Automatically Generated SBDTs	47
3.3	Metrics and Key Figures for Model Evaluation	47
3.4	Online Validation and Continuous Feedback Loop . .	47
4	Implementation	—48
4.1	Architecture and System Setup	48
4.2	Event Log Processing	48
4.3	Simulation Integration	48
4.4	Machine Learning Pipeline	48
5	Testing	—49
5.1	Application Scenario and Data Basis	49
5.2	Automatically Generated Digital Twin	49
5.3	Validation Experiments	49
5.4	Results and Interpretation	49
5.5	Comparison with Manual Validation Methods	49
6	Discussion	—50
6.1	Evaluation of the Developed Framework	50
6.2	Significance of Verification in Automatically Gener- ated Digital Twins	50
6.3	Limitations of Automated Validation	50
6.4	Implications for Research and Practice	50
7	Conclusion and Outlook	—51
7.1	Summary of the Key Findings	51
7.2	Methodological and Theoretical Insights	51

7.3 Outlook	51
7.4 Recommendations for Practical Application	51

List of Abbreviations

AGDT Automatically Generated Digital Twin. 1

ASMG Automatic Simulation Model Generation. 1

BNN Bayesian Neural Network. 1

BPMN Business Process Model and Notation. 1

CNN Convolutional Neural Network. 1

CPS Cyber-Physical System. 1

DDDT Data-Driven Digital Twin. 1

DE Deep Ensembles. 1

DES Discrete-Event Simulation. 1

DM Digital Model. 1

DMFS Discrete Material Flow Systems. 1

DS Digital Shadow. 1

DT Digital Twin. 1

E2O Event-to-Object Relation. 1

GP Gaussian Processes. 1

HDT Hybrid Digital Twin. 1

IoT Internet of Things. 1

KPI Key Performance Indicator. 1

LSTM Long Short-Term Memory. 1

MCD Monte Carlo Dropout. 1

ML Machine Learning. 1

O2O Object-to-Object Relation. 1

OCEL Object-Centric Event Log. 1

PM Process Mining. 1

PPC Production Planning and Control. 1

RNN Recurrent Neural Network. 1

SBDT Simulation-Based Digital Twin. 1

V&V Verification and Validation. 1

VVUQ Verification, Validation, and Uncertainty Quantification. 1

XES eXtensible Event Stream. 1

Chapter 1

Introduction

1.1 Initial Situation

Digital Twins (DT) are a key technology at the front of the fourth industrial revolution, often referred to as Industry 4.0. The latter term is characterized by the integration of cyber-physical systems (CPS), the Internet of Things (IoT), and cloud computing to create smart factories aimed at automation and efficiency (Oztemel & Gursev, 2020). Companies pursue this vision by trying to remain competitive through the adoption of innovative technologies that promise enhanced productivity and reduced operational costs. One such technology that supports this transformation is the DT. It can be defined as a virtual representation of physical assets enabling real-time monitoring and optimization (Tao et al., 2018). The DT bridges the connection between the two entities with a bi-directional data flow to exchange information and to influence the behavior of the physical asset (Grieves, 2014). This technology is central to Industry 4.0, facilitating the physical and digital worlds through real-time data integration, simulation, and optimization (Judijanto et al., 2024).

Although this discipline is rapidly evolving, a unified definition of DT has yet to be established due to the diverse requirements and perspectives across different fields. In engineering, the focus might be on the real-time interaction between physical systems and their digital counterparts, whereas in computer science, the emphasis is often on data integration and simulation capabilities. These varying priorities result in multiple interpretations and applications of the term DT. The concept was first introduced by Michael Grieves in 2002, who defined it as a digital representation of a physical object or system (Grieves, 2014). However, the concept has evolved since, encompassing a broader range of applications

and technologies. In the literature, three terms are used to describe similar characteristics of DT: Digital Model (DM), Digital Shadow (DS), and Digital Twin (DT), see Figure 1.1 (Jones et al., 2020; Zhang et al., 2021).



Figure 1.1: Comparison of Digital Shadow (DS), Digital Model (DM) and Digital Twin (DT) as presented by Kritzinger (2018). This distinction is crucial for understanding validation requirements across different digital representation types.

The Digital Model (DM) represents the most basic form. It involves manual data connections between physical and digital entities. These connections can be temporarily shifted or even disconnected. There is no direct control of the digital object over the physical entity. It is primarily a simple or complex model *describing* the physical object. The data flow must be manually triggered by the modeler, who also interprets the results and controls the DM. The Digital Shadow (DS) is a more advanced version of the DM. It is a digital representation of the physical object that is continuously updated with real-time data, allowing for monitoring, analysis and simulation. While it can predict future states of the physical object based on the current state and historical data, it is not able to influence the physical object without human intervention. The control is, similar to the DM, still in the hands of the modeller. A DS is frequently used for simulation purposes and is sometimes misclassified as a DT in the literature (Kritzinger et al., 2018; Sepasgozar, 2021). The Digital Twin (DT) is the most advanced version of the three, offering a digital representation of the physical object, which is also continuously updated with real-time data. The DT can be used for monitoring, analysis, and *control* purposes. It can predict the future states of the physical object based on the current state and historical data. The DT can also influence the physical object by sending control signals to it. The control is partially or completely in the hands of the DT. The DT thus *can* serve more purpose than modelling or simulating the physical object. It may serve as an autonomous system, updating itself or with minimal human intervention (Kritzinger et al., 2018).

DTs are applied across various sectors, including manufacturing, defense, automotive, service, finance and healthcare (Tao et al., 2018). Manufacturing is particularly notable due to its high potential for process optimization and automation. This thesis focuses on the latter, particularly discrete material flow systems (DMFS). These systems process discrete objects (parts) moving along transportation routes or conveyor lines at regular or irregular intervals, integrating both production and logistics operations (Arnold & Furmans, 2005; Schwede & Fischer, 2024). A key simplification in their modeling is the abstraction of material flow as a sequence of discrete events, following the principles of discrete-event simulation (DES) (Kovacs & Kostal, 2016; Robinson, 2014). DES is well-suited for analyzing complex systems where state changes occur at discrete points in time, such as arrivals, departures, and processing steps (Robinson, 2014).

Historically, DM played a crucial role in the design, planning, and control of DMFS, primarily through applications like material flow simulations, logistic assistance systems, and digital factory implementations (Thiede et al., 2013). However, advancements in both DS and DT have enabled a shift from isolated, use-case-specific models toward complete digital representations that span the entire lifecycle of DMFS (Abdoune et al., 2023). This transition is largely driven by the growing demand for predictive capabilities by stakeholders and automated decision support in manufacturing systems, reflecting the core principles of Industry 4.0 (Frank et al., 2019). A second driver of DT innovation lies in the widely available data from IoT devices and sensors, which enhances model training and real-time adaptation of DTs (Tao et al., 2018).

In practice, the automated data transfer between the digital model and the physical system is not always critical for DMFS management. Unlike in time-sensitive applications, human decision-makers often remain integral to the control loop, meaning that real-time automation is not always necessary (Schwede & Fischer, 2024). Therefore, for this thesis, DS and DTs will be treated as equivalent concepts.

Beyond replicating the current state and managing historical data, DTs are essential for predicting system behavior and evaluating potential modifications. The widespread use of DES within digital twins highlights the central role of simulation-based DTs (SBDTs) in DMFS (Lugaresi & Matta, 2021). As Schwede and Fischer emphasize, SBDTs provide decision support for optimizing costs and performance in highly competitive manufacturing environments. While current SBDTs are primarily developed and updated manually by domain experts, emerging research explores how machine learning (ML) can enhance predictive

accuracy and automate model updates by automatically learning model characteristics, reducing costs and development time.

Thus, the progression from digital models to simulation-based DTs reflects an ongoing shift toward data-driven, predictive, and increasingly automated representations of DMFS, enabling more informed decision-making throughout the system's lifecycle (Boschert & Rosen, 2016; Lim et al., 2020).

1.2 Problem

Despite the transformative potential of DTs, their implementation can be challenging. Creating and maintaining accurate DTs require substantial investments in technology and domain knowledge. This investment is wasted if the resulting model fails to accurately represent the physical entity or produces incorrect results. While automatic generation may seem like an elegant solution, it carries risks such as overfitting or biased predictions (Geman et al., 1992). Manufacturing data for training must be rigorously cleaned and preprocessed. Automatically generated DTs must also undergo automatic Validation, Verification, and Uncertainty Quantification (VVUQ) to preserve their cost and time advantages. Manual VVUQ, which relies on humans in the loop, hinders scalability, automatic synchronization with the physical entity, and depends on costly domain knowledge often provided by experts (Bitencourt et al., 2023). These hurdles are significant barriers to automatic learning (Ribeiro et al., 2016; Zhao et al., 2024). As industries integrate DT into their production processes, establishing trust becomes fundamental as well (Arrieta et al., 2020; Trauer et al., 2022). For widespread acceptance among coworkers, stakeholders, and investors, automatic DT creation and VVUQ must demonstrate clear advantages over manual creation and expert-led VVUQ.

Even when DT learning is successfully performed, questions about its correctness, precision, and robustness persist. These concerns are addressed by validation, verification, and uncertainty quantification frameworks (VVUQ) (Sel et al., 2025). Ensuring the validity, reliability, and accuracy of a DT is critical, yet traditional VVUQ approaches rely heavily on manual expert involvement and case-specific reference values (Bitencourt et al., 2023; Hua et al., 2022). This leads to inefficiencies, particularly in the context of automated DT generation, where such manual processes undermine the goal of reducing development effort. Hua et al. even argue that there are no robust and standardized verification and validation methods for DTs. As (Sel et al., 2025) point out, uncertainty quantification is often overlooked, but addresses an important aspect of assess-

ing low noise in explanations. One hurdle to standardized VVUQ frameworks is the lack of a clear definitions for validity and verification in the context of DTs (Bitencourt et al., 2023).

For discrete material flow systems (DMFS), these challenges are even more pressing due to their procedural nature and inherent stochasticity. Rigorous VVUQ is essential to address the risk of manufacturing process failures caused by anomalies, resource constraints, software faults, or human error. This necessity arises because such failures can disrupt the intricate workflows and unpredictable dynamics inherent in DMFS, making reliable performance prediction a priority. When DTs for these systems are generated automatically, traditional validation methods become problematic, as they negate much of the efficiency gains through automation. This creates a fundamental conflict: while automated DT generation reduces initial development and updating efforts, it simultaneously increases the complexity of validation and verification, potentially counteracting its intended efficiency gains.

1.3 Objective

This thesis addresses this conflict by developing a data-driven framework for automated VVUQ of automatically generated, simulation-based DTs which have been learned from data. The focus lies on DMFS due to their practical relevance and dynamical, procedural nature. The research can further be specified by the following research questions (RQ):

- **RQ1:** How can automated validation and verification processes for DTs be efficiently implemented to maintain accuracy?
- **RQ2:** Which data-driven approaches are best suited to identify discrepancies between simulated behavior and real operational data in discrete material flow systems?
- **RQ3:** To what extent does the developed framework improve the quality and reliability of DTs compared to traditional VV methods?

This thesis proposes that object-centric event logs—commonly used to generate DTs in manufacturing—can also serve as the foundation for an automated, use-case-independent validation and verification framework. Such an approach would preserve the efficiency benefits of automated generation while ensuring that the resulting DTs meet necessary standards. A key aspect of this approach is the development and monitoring of generic, statistically grounded reference

values, which must be quantifiable and have an underlying distribution. The framework will be evaluated using a case study from the discrete material flow domain, providing empirical evidence of its effectiveness in improving model accuracy and efficiency.

1.4 Structure and Methodology

Structure

The thesis is organized into eight chapters. Chapter 2 establishes the theoretical foundation. It begins with broad, domain-specific concepts and progressively narrows the focus to the core topics of this thesis: Automated verification and validation (VVUQ) of simulation-based digital twins (SBDTs) in discrete material flow systems. Section 2.1 introduces material flow planning and simulation, outlining the key elements of production systems, such as processes, resources, and control mechanisms. It also defines key performance indicators (KPIs), essential for evaluating both real and simulated systems, providing the practical context in which DTs operate. Section 2.2 then transitions to the DT concepts. A framework for comparing DTs by Schwede and Fischer (2024) is presented. Special attention is given to data-driven DTs and their subset, automatically generated digital twins (AGDTs). The section concludes by contrasting AGDTs with classical simulation models, highlighting the challenges posed by automatically generated models. Building on this foundation, Section 2.3 presents the principles of process mining (PM) and event log analysis, focusing on object-centric event logs as a data basis for automated validation. This section demonstrates how PM acts as a bridge between real-world process data and model validation, thus enabling continuous verification of SBDTs. Section 2.4 narrows the focus further to VVUQ in the context of SBDTs, beginning with a historical overview of VVUQ methodologies. It then addresses the specific challenges posed by automatically generated models, such as data dependency and lack of transparency in model creation. The section introduces machine learning-based approaches for VVUQ, particularly classification methods for detecting model deviation. It also explores the current state of VVUQ in corporate practice, emphasizing the need for continuous and automated validation processes.

Chapter 3 outlines the methodology for developing the proposed framework. It begins with a requirements analysis, deriving functional, technical, and data format requirements from theoretical findings. The chapter then elaborates on the data-based validation strategy, machine learning-based validation approach, metrics for model evaluation, and online validation with continuous monitoring.

Chapter 4 presents the implementation of the framework, starting with the architecture and system setup, followed by detailed descriptions of event log processing, simulation integration, and the machine learning pipeline.

Chapter 5 presents the case study results, evaluating the framework's effectiveness in improving DT quality. It describes the application scenario and data basis, the automatically generated DT, validation experiments, and result interpretation. It concludes with a comparison to manual validation methods.

Chapter 6 discusses the implications of the results and provides recommendations for future research. It evaluates the framework in light of the research questions, examines the significance of verification in automatically generated DTs, addresses limitations, and explores implications for research and practice.

Chapter 7 concludes the thesis by summarizing key findings and their implications. It addresses the research questions and hypotheses, discusses the significance of the results, acknowledges limitations, and provides recommendations for future work.

Methodology

The thesis follows a Design Science Research approach (DSR). This approach is characterized by the development of artifacts to solve practical problems (Hevner et al., 2004; Peffers et al., 2007). Artifacts in the sense of DSR are created objects or constructs which address the given problem and contribute to both theory and practice. The artifacts are evaluated in a real-world context to demonstrate their effectiveness. The thesis applies the cyclical DSR model, see figure 1.2.

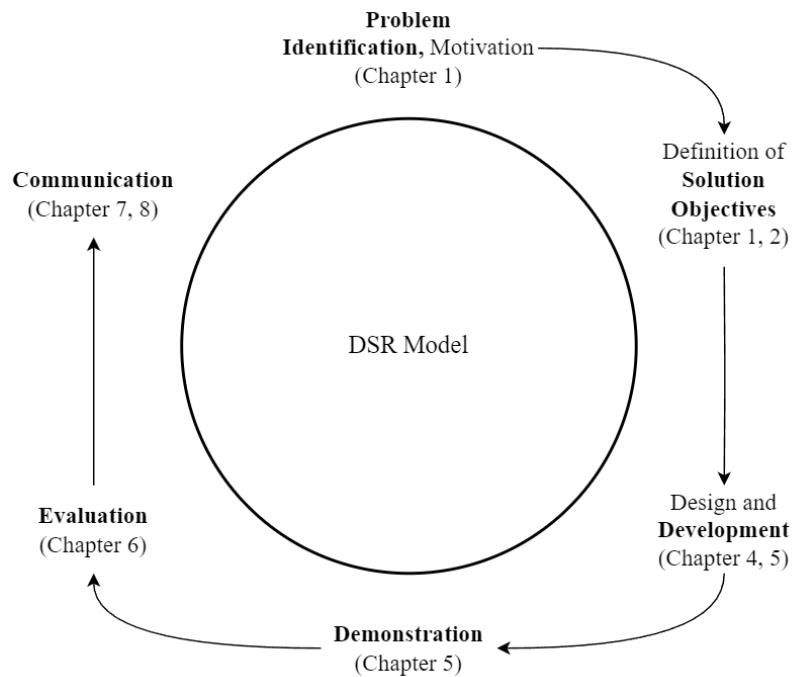


Figure 1.2: The cyclical design science research model. The model consists of six steps. The problem identification (1) refers to the research gap in automated VVUQ of SBDT. Defining the solution objectives (2) specifies the research gap by formulating questions and hypotheses based on the theoretical foundations. The design and development (3) phase includes the development of the framework. The demonstration (4) phase shows the application of the framework in a case study. The evaluation (5) phase assesses the effectiveness of the framework. The communication (6) phase concludes the research by presenting the results.

The research paradigm of the thesis is deductive-theory critical (Eberhard, 1987). A conceptual VVUQ framework is developed based on existing theoretical foundations, while deriving new requirements through a requirements analysis. The framework is then applied in a case study to evaluate its effectiveness. The research is critical in that it aims to improve the efficiency and effectiveness of VVUQ for automatically generated DTs. Elements of empirical research are included through the case study and the data-driven approach.

Chapter 2

Theoretical Foundation

The following chapter provides a theoretical foundation for the research conducted in this thesis. It introduces the basic concepts of material flow planning and simulation, digital twins, process mining, and verification, validation, and uncertainty quantification (VVUQ). The relevance of these concepts in the context of simulation-based digital twins and their application in corporate practice will also be discussed.

2.1 Discrete Material Flow Systems and Simulation

This section begins with an introduction of the underlying concepts of Discrete Material Flow Systems (DMFS) and Simulation Based Digital Twins (SBDT).

2.1.1 Basic Concepts

Discrete material flow systems cannot be fully understood without first clarifying the principles of Discrete Event Simulation (DES) for Discrete Event Systems. In DES, a system changes its state through *events* that occur at specific, discrete time instances; it is assumed that no changes occur between two successive events. Consequently, the state of the system is completely defined by the values of its descriptive variables at each event occurrence (Varga, 2001). The time at which an event occurs is typically marked by a timestamp, and the scientific observation of such systems is conducted by analyzing the discrete *sequence* of events over time (Robinson, 2014).

Simulation, in this context, refers to the process of imitating the operation of a Discrete Event System over time—often through multiple event sequences. This imitation is captured in a model, and the core activities in a simulation involve

constructing and experimenting with this model. A high-quality simulation abstracts the essential features of the system, which requires the modeller to have a sound a priori understanding of what “essential” means in the given context. Although the model can later be refined, its quality is primarily measured by its ability to predict outcomes and offer a diverse range of scenarios (Maria, 1997).

In the context of DMFS, their simulation describes the imitation of material flow systems by breaking down continuous flows into discrete events. Such material flow systems can be characterized as “systems processing discrete objects (parts) that move at regular or irregular intervals along transportation routes or conveyor lines, comprising production and logistic systems” (Arnold & Furmans, 2006; Schwede & Fischer, 2024). These systems form the backbone of material flow planning and control structures. The central idea of material flow planning and control is to ensure that material requirements—both in terms of quantity and timing—are met during transportation and storage across the various stages of the supply chain (“Der Materialfluss im Zuliefernetzwerk — integrierte und prozessorientierte Planung und Steuerung”, 2007). Importantly, the time horizon of interest spans from order placement up to delivery. To summarize, DMFS are often simulated using DES, which abstracts the continuous flow of materials into discrete events. The simulation is carried out using a model. The simulation and modeller are embedded in the context of material flow planning and control, which aims to ensure that material requirements are met across the supply chain. Successfully performed material flow planning and control induce high quality data for simulation and modelling purposes.

2.1.2 Comparing DMFS

Because the simulation of DMFS often involves (discrete) event simulation, events in DMFS need to be further differentiated to be comparable. (Arnold & Furmans, 2006) propose to differentiate DMFS into static and dynamic components.

Static components describe the possible states of the system. Possible states can be the set of possible processes given a part or resource, for example. Dynamic components define the concrete material flow for a certain part or order. Static components include parts, resources and processes (Schwede & Fischer, 2024). Parts are transformed by processes using resources sometimes based on orders. Transformation can have an impact on physical properties of the parts (transformation model), spatial position (transition model), the quality of the parts (quality model) and takes time (time model) and uses resources (resource

model). Resources have a capacity of handling parts in parallel (resource capacity model) and processes have a predecessor-successors relationship (process model). Dynamic components are used to define the concrete dynamic material flow within the DMFS. There are four components: Order generation, order control, resource control and supply control. Order generation defines the load the system must process. Order control defines how parts are processed, sometimes referred to as routing rules (Milde & Reinhart, 2019). Resource control defines how resources decide to handle processing requests, also sometimes referred to as priority rules. Supply control describes how supply parts are provided (Milde & Reinhart, 2019; Schwede & Fischer, 2024). See the latter source for a more detailed description of the components.

2.1.3 Production Planning and Control

Successful companies use production planning and control frameworks to describe and optimize their DMFS. After establishing a theoretical foundation and simulation approaches for DMFS, this section thus focusses on Production Planning and Control (PPC) as a critical factor influencing the quality and quantity of data generated by Discrete Event Simulation. PPC is the structured approach to planning, scheduling, controlling and managing all aspects of the manufacturing process. It involves the coordination of resources, processes, and orders to meet production goals. PPC is essential for optimizing production processes, reducing costs, and improving quality. The main functions of PPC include production planning, production scheduling, and production control. Production planning involves determining the production capacity, production goals, and production processes. Production scheduling involves creating a detailed schedule for production activities. Production control involves monitoring and controlling production activities to ensure that production goals are met (Kiran, 2019). Scheduling is usually the last step performed before execution of the plan (Pinedo & Pinedo, 2012).

The integration of PPC with simulation models is crucial because it directly affects the data quality used in DES of DMFS. Effective PPC processes anticipate anomalies in the production cycle, allowing for adjustments that maintain system efficiency and reliability. If successful, these adjustments yield high-quality data that enhance the accuracy of simulation outcomes. (Kiran, 2019).

2.1.4 Relevant KPIs and Metrics

Up to this point, DES for SBDT of DMFS has been introduced, outlining the key factors that contribute to a robust simulation. A model differentiation framework proposed by Schwede and Fischer has been briefly presented to facilitate comparison of SBDT. Furthermore, the critical role of PPC in generating high-quality data for simulation has been discussed. These discussions ignored up till now that, even when SBDT are integrated within well-functioning PPC processes, various SBDT models remain prone to errors and inherent trade-offs that must be addressed by the modeller (Tao et al., 2018).

The goal conflict of the modeller when developing SBDT can be described by the following conflict triangle (Balci, 2012; Robinson, 2014):



Figure 2.1: The goal conflict of the modeller when developing SBDT. Aiming for higher accuracy (validity) often leads to higher computational costs (efficiency) and reduced scalability (applicability). Reaching more efficiency often leads to reduced accuracy and scalability. Aiming for higher scalability often leads to reduced accuracy and efficiency.

Focusing one of the three dimensions—accuracy (validity), efficiency (computation time), and applicability (scalability)—often leads to trade-offs in the other two dimensions. Oftentimes the data itself is not sufficient to make a decision on which trade-off to make. Limited data points may hinder the modeller from reaching high validity. System architecture may block the system from reaching good scalability. Hardware limitations may hinder the modeller from reaching high efficiency. At other times, corporate management may have a preference for one of the dimensions.

One solution to balance and quantify these goals can be achieved by defining a set of KPIs. Some may already be available through PPC, some may be calculated from DES data or the DES itself. Optimally, the data warehouse provides relevant views (Cui et al., 2020). Because the SBDT in theory mirrors the DMFS, the KPIs gathered from PPC and the DES should yield identical values. Deviations between the KPIs of the SBDT and the DMFS may indicate errors in the SBDT or anomalies in the DFMS. The following KPIs are relevant for the evaluation of SBDT:



Figure 2.2: SBDT KPIs differentiated by PPC-based and Infrastructure-based indicators.

The PPC related KPIs may be provided by above mentioned data warehouse, because they are highly relevant in the context of production scheduling and -control. Throughput measures the number of produced parts at the last station in a specified period. It is an indicator for the productivity of the manufacturing system (Imseitif et al., 2019). Lead time is the cumulative time a part travels through the system from start to sink. It is an indicator for the efficiency of the manufacturing system (Pfeiffer et al., 2016). Cycle time measures the same amount like lead time but focusses only on the active production process, excluding transports and waiting times (Griffin, 1993). Setup time measures the time needed to prepare a machine for a new task. It is an indicator for the flexibility of the manufacturing system (Allahverdi & Soroush, 2008). In the given usecase,

we aggregate the setup time for all setup processes. All KPIs presented so far can be calculated dynamically when new data has been sent. Later on, they may serve as an alert system for the modeller to detect deviations between the SBDT and the DMFS, see section 2.4.

The infrastructure related KPIs are derived by sensors from the executing system of the SBDT. Ping time measures the time needed to send a signal from one point to another. It is an indicator for the latency of the infrastructure (Y. Wu et al., 2021). SBDT need to enforce real-time control over the physical entity. The latency thus needs to be as low as possible. In this scenario, one point (sender) is represented by the physical entity and its sensors. The receiving point runs the SBDT. It is advantageous to run the SBDT on Edge to minimize latency- and transmission costs (H. Li et al., 2018). CPU-, memory-, disk- and network usage metrics are indicators for the load of the infrastructure. They are important to detect bottlenecks in the infrastructure (H. Li et al., 2018). The first indicator is usually measured in percent of the maximum CPU capacity. The latter three indicators are usually measured in bytes or bits per second (Granelli et al., 2021).

2.2 Digital Twin: Definition and Concepts

The latter section gave a short introduction into DFMS, DES, its metrics and the corporate processes accompanying the SBDT. Now, we shed light on the DT itself. For a short introduction to the topic, see chapter 1.

Like introduced in the predecesing chapter, DT inherent the highest order of modelling fidelity compared to DM or DS. There are different definitions of DT present in the literature (Boschert & Rosen, 2016; Demkovich et al., 2018; Glaessgen & Stargel, 2012; Grieves, 2014; Kritzing et al., 2018; Negri et al., 2017; Tao et al., 2018; Zehnder & Riemer, 2018; Zheng et al., 2019). Each of them highlights different aspects of the DT. This thesis utilizes the definition by (Grieves, 2014) which highlights the conceptual elements of the twin and its lifecycle focus:

The digital twin concept (...) contains three main parts: A) Physical products in real space, (B) virtual products in virtual space and (C) the two-way connections of data and information that tie the virtual and real products together. (Grieves, 2014)

The physical product is the entity which will be modelled. The virtual product is the DT itself, but also its infrastructure, for example data services making the real-time data flow possible (Tao et al., 2018). The two-way connection is

the data flow between the physical and the virtual product. The data flow is bidirectional. Zehnder and Riemer add that the data flow may contain meta data "describing the data source and its context". Also the connection protocol is of importance here (e.g. MQTT or REST). TCP may be the method of choice as it ensures that the packages arrive in the correct order and without errors (H. Li et al., 2018).

2.2.1 Types of Digital Twins

Now that a unified understanding of DT has been established, this section focuses on how DT may be learned from different sources of information. The following list includes the most relevant types of DT with a focus on different kinds of information sources:

- Simulation-based DT (SBDT) (Lugaresi & Matta, 2021; Martinez et al., 2018)
- Data-driven DT (DDDT) (Friederich et al., 2022; He et al., 2019)
- Hybrid Digital Twins (HDT) (Huang et al., 2023; Luo et al., 2020)

SBDTs (Boschert & Rosen, 2016; Lugaresi & Matta, 2021; Martinez et al., 2018) are based on DES. They utilize discrete event simulation (see section 2.1) to create a dynamic representation of the physical system (Pantelides & Renfro, 2013; Schluse & Rossmann, 2016). To incorporate a SBDT into workflows and processes, suitable data structures must be in place beforehand (Boschert & Rosen, 2016). DES may improve the predictive capabilities of the model compared to manual twin creation. DES is able to model causal relationships between the events (Francis et al., 2021). In contrast, the development of a realistic simulation model requires experts and time (Charpentier & Véjar, 2014). If the simulation model fails to capture recent behaviour of the physical entity, a recalibration is mandatory (Friederich et al., 2022). To conclude, SBDTs are a step forward to speed up the creation and updating processes of DTs.

DDDT rely on the utilization of data to model the physical entity. The data may be gathered from sensors, data warehouses or other sources. The data is used to train a model which represents the physical entity. The model may be a neural network, a decision tree or another machine learning model. The model is then used to predict future states of the physical entity. The model may be updated with new data to increase its accuracy (Friederich et al., 2022; He et al., 2019). For a more detailed description of DDDT including its up- and downsides, see subsection 2.2.2.

HDT combine different sources of information to create a more accurate model of the physical entity. The sources may be simulation models (see section 2.1), data-driven models (see subsection 2.2.2) or physics-based models. Physics-based models contain information about the physical properties and behaviors of the entity. They do not have to learn these characteristics from the data because this information is made available to the model *a priori* (Aivaliotis et al., 2019; Kapteyn et al., 2022). The simulation based models accompanying the physics-based one obeys characteristics of SBDT, see above. The combination of different sources may make the HDT more robust and a faster learner. HDT unite the advantages of SBDT with the knowledge advantage physics based models have. Unfortunately, they also inherit the disadvantages of SBDT. Physics-based models may also involve heavy computational costs and domain expertise (Kapteyn et al., 2022).

2.2.2 Data-Driven Digital Twins

While SBDTs and HDT possess not negligible computational costs and require domain expertise, DDDT are able to learn from data without the need for a hand-written simulation model. The DDDT *learns* the model. Learning in the context of DDDT is not trivial, several approaches have been proposed in the literature (Francis et al., 2021; Friederich et al., 2022; He et al., 2019). Often times Data Science methods come to work. The learning process may be supervised or unsupervised. Supervised learning uses labeled data to train the model (Cunningham et al., 2008). The label can symbolize different values of interest. Unsupervised learning uses unlabeled data to train the model (Barlow, 1989). Often times, the task at hand is to group the data into different categories. Data sources of interest may be process data, resource data or order data (Biesinger et al., 2019). The learning process may be online or offline. Offline learning uses the data *once* for training, validation and testing, while online learning continuously updates the model with new data to adapt to changes in the physical system. Online learning is thus able to capture new trends in the data and to foresee concept drift (Tsybal, 2004). DDDT have to be differentiated from data-driven simulation (Charpentier & Véjar, 2014), which involves human intervention to create highly individual solutions for the physical entity. The key difference is that every characteristic has to be explicitly described in the model by the expert, there are no efforts to let an intelligent algorithm learn these by itself. DDDT may be able to update themselves to new trends in the data by online learning, termed *synchronization* (Reinhardt et al., 2019). Latter has to be differentiated from *updating*, which is a manual process to take corrective action in the logic of the

twin itself (Schwede & Fischer, 2024). An example for updating a DDDT may be the addition of a new feature to the model. An example for synchronization may be the adaption of the model to new trends in the data. The latter may be done by the model itself, the former has to be done by the modeller. DDDT thus rely less on domain expertise and manual model creation. A suitable model may be able to capture relevant trends in the data and to predict outcomes which describe most of the characteristics of the physical entity. (Francis et al., 2021) propose several key elements a DDDT must contain to be termed *data-driven*:

1. **Data Collection:** The relevant entities to be modelled have to be identified. This activity involves data gathering of the identified entities and ensuring a steady data stream to a database. The data may be gathered from sensors, data warehouses or other sources.
2. **Data Validation:** This step involves cleaning and preprocessing the data. The data may contain missing values, outliers or other errors. The data has to be cleaned and preprocessed to ensure a high quality of the model. Plausibility checks may be performed to ensure the data is correct.
3. **Knowledge Extraction:** After the data has been collected and cleaned, events have to be detected. Francis et al. utilize process mining terms in this context, such as event detection and process discovery. The main goal in this step is to find a common ground on which events are of interest. The thesis later dives deeper into Process Mining techniques applied here, see section 2.3.
4. **(Semi-)automatic Simulation Modeling:** The data is used to train a model. This step may use offline or online data as a stream. The model may be a neural network, a decision tree or another machine learning model. The model is then used to predict future states of the physical entity. The model may be updated with new data to increase its accuracy.
5. **Continuous Model Validation:** Interestingly, Francis et al. propose a continuous model validation. In the online learning case, they recommend to use the steady data stream to apply validation techniques continuously, see section 2.4 The validation may be performed by comparing the model predictions with the real data. If the model deviates from the real data, the model may be recalibrated.

DDDTs go one step further than SBDT and minimize the influence of the human in the loop (Francis et al., 2021; Friederich et al., 2022). Faster model development and updating activities are the result. The third reason to automate

DT endeavours elaborated by Schwede and Fischer, increasing prediction quality, rises and falls with the data quality, thus the gathering and preprocessing efforts of the modeller. Extrinsic factors like the number of data points available also play into the equation. If the number of features is greater than the number of samples, the curse of dimensionality hinders a good modelling performance (Köppen, 2000). DDDT should avoid biased or noisy predictions at all costs. The identification of *relevant* events poses the risk of introducing a selection bias, rather a confirmation bias. The modeller may have the tendency to select events which confirm his or her hypothesis. Random sampling may be a solution to this problem, but can destroy sequential information patterns in event sequences. Overall DDDT are a promising approach to model the physical entity. If the right balance between human involvement and automated learning is found, it may be an efficient solution (Francis et al., 2021). Thinking one step ahead, employing data-based VVUQ approaches may also be a gamechanger. This topic will be discussed in Section ??.

One last discipline, automatic simulation model generation (ASMG), is worth mentioning. ASMG has to be differentiated from DDDT by the effort to automatically generate models, thus DM and DS through DES. Automatic DT generation is not necessarily the goal. It aims to automate the model generation process and tries to eliminate the human in the loop, (Lechevalier et al., 2018; Reinhardt et al., 2019). Automation is achieved by taking into account a diverse range of data sources, including Computer Aided Design data, PPS data, production manuals, process data and programming code, thus reaching a high data variability. The gathered data has to be processed online or offline as well through suitable frameworks or human intervention. Challenges lay in incomplete data (Bergmann, 2014), although the same problems of DDDT also apply here. If the gained data is not mined thoroughly, human intervention is needed again, mitigating automation efforts.

To conclude this section about DT, the thesis summarizes that there are different types of DT differentiated by their source of information retrieval. A lot of work has been done to make the DT creation, updating and prediction process more efficient. By the help of simulation, data and automated model generation, the DT may be created with less time and resources than manually.

2.3 Process Mining and Event Logs

After we introduced the corporate embedding of DTs and their types, the thesis now focusses on process mining (PM) and event logs. PM is a discipline which

aims to extract knowledge from event logs. Event logs are the data basis for PM. The following section introduces the basic concepts of PM and event logs.

2.3.1 Core Concepts

PM is a discipline established 1999 which is interdisciplinary rooted in the field of Data Science and Process Science (Van Der Aalst & van der Aalst, 2016). Data Science can be considered a process agnostic discipline (Van Der Aalst & van der Aalst, 2016) while process science uses models not covering hidden trends in the data. The bridge between both approaches is PM. The goal of PM is to use event data to identify and extract process information (W. van der Aalst, 2012). This information is used to discover (process discovery), monitor (conformance checking) and improve processes (process enhancement) (W. van der Aalst, 2012) by using event logs. Such logs must contain a case ID, an activity name and a timestamp. Additional information like resource informations, order informations or other context information may be added to the log (W. van der Aalst, 2012). Such logs assume that the process can be captured fully and sequentially.

Table 2.1: A fragment of a manufacturing event log: Each line corresponds to an event. The case ID groups unique events which are identified by an event ID to one group, a trace. The timestamp refers to the time of event occurrence, while the activity describes the event. In this example, additional information like resource name and cost are given as well. Case 1, for example, consists of five events, involving a warehouse, two inspectors, and one machine.

Case id	Event id	Timestamp	Activity	Resource	Cost
1	101	10-01-2025:08.00	receive raw material	Warehouse A	500
	102	10-01-2025:08.30	initial quality check	Inspector Bob	300
	103	10-01-2025:09.00	cutting process	Machine X	800
	104	10-01-2025:09.45	assembly	Worker Alice	600
	105	10-01-2025:10.30	final inspection	Inspector Eve	400
2	201	11-01-2025:07.45	receive raw material	Warehouse B	500
	202	11-01-2025:08.15	cutting process	Machine Y	800
	203	11-01-2025:09.00	welding	Robot Arm Z	700
	204	11-01-2025:09.45	quality assurance	Inspector Dave	400
3	301	12-01-2025:06.30	receive raw material	Warehouse C	500
	302	12-01-2025:07.00	initial quality check	Inspector Judy	300
	303	12-01-2025:07.30	CNC machining	Machine W	900
	304	12-01-2025:08.15	painting	Worker Karl	500
	305	12-01-2025:09.00	packaging	Worker Laura	350

Table 2.1 illustrates the PM concepts. The case ID groups unique events which are identified by an event ID to one group, a trace. The timestamp refers to the time of event occurrence, while the activity describes the event. In this example,

additional informations like resource name and cost are given as well. Cases containing the same events identified by unique event IDs will have different case IDs (Van Der Aalst & van der Aalst, 2016). Process discovery may try to produce a process model from the event log. The model may be a Petri net, a BPMN model or another process model. The challenge lies not in the recording of every trace present in the event log, rather in finding a generic representation of the most occurring traces. The process model must be generic enough to describe most traces, but specific enough to not get invalidated by future traces which may contain completely different events. Another major building block of this process model is accounting for trace concurrency. When several events may be identified to happen in parallel during the same time window, the model must recognize this. It can be spoken of a classical bias-variance tradeoff lend from data science. The process must contain the most frequent traces but has to filter out traces which contain anomalies. Such anomalies like longer time per event due to a fire alarm have to be accounted for. Conformance checking may compare a given process model against a given event log. They are specialized in detecting aforementioned anomalies. A key insight in conformance checking lies in two possible deviations from reality: The given model does not capture the real behaviour (A) or reality differs from the model (B). In the first case, the model is not working as intended. In the second case, the event log is corrupt. The third view on event logs, process enhancement, enables the modeller to use the generated process model to identify bottlenecks. Anomalies identified serve as a good starting point because they reveal errors in the process sequence. The given table offers costs associated to each event ID. This information may be used to create an event benchmark to further optimize the desired "ideal" trace. The first goal of course is to ensure that no mistakes happen during a process.

More generally, PM empowers the modeller to perform VVUQ of an process model, event log or described trace. This concept is captured by the terms *Play-In*, *Play-Out* and *Replay* (Damm & Harel, 2001), see Figure 2.3.

Play-In refers to the creation of a process model out of an event log. Play-Out may be called "sampling" in data science as it generates traces out of the model. DES uses Play-Out to generate new exemplary behaviour, see section 2.1. Here, a process model may be used to play-out (simulate) several traces of the desired events and then use bagging techniques like averaging the durations per event to gain robust KPIs (subsection 2.1.4) and to reduce variance. A biased process model may still generate biased KPIs. Replay uses event log and process model together to check conformance, enriching the model with information captured in the log or to transform a descriptive process model into a prescriptive one

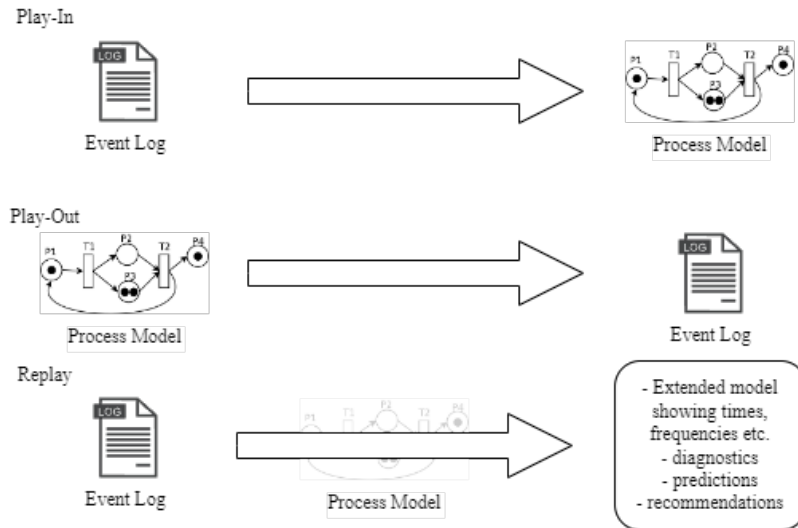


Figure 2.3: The Play-In, Play-Out and Replay concept in the context of process mining. The Play-In phase involves the creation of a process model from an event log. The Play-Out phase involves the creation of an event log from a process model. The Replay phase involves the modification of the process model thorough information gained from the event log.

(Van Der Aalst & van der Aalst, 2016).

PM uses different formats to display process models like petri nets and BPMN models, among others (W. van der Aalst, 2012). The thesis at hand focusses on DDDT in the context of simulation. Such data-driven models often come as a black box, thus they can not be rendered by PM models.

2.3.2 Object-Centricness in Process Mining

The problem with traditional PM lies in its single dimensionality of perspective. For each process question, a new play-out has to be performed. Interactions between different objects are not captured (W. M. van der Aalst, 2023). One event may be related to different cases (convergence) or from the perspective of a case, there may be several equal activities within a case (divergence) (W. M. van der Aalst, 2019). Recently, object-centric event data (OCED) have been proposed as a new data basis for PM (W. M. van der Aalst, 2019). OCED logs (OCEL) are a generalization of classical event logs. Such traditional event logs use the case ID as a label to group and distinguish events. They assume that the process model describes the start and end of a single object. Each event refers to exactly one object (case) (W. M. van der Aalst, 2023). OCED overthrows these assumptions by assuming that events may relate to multiple objects. To account for this new logic, OCEL coins the terms events, objects, types, attributes and qualifier. Each object has exactly one object type. Several objects may have the same type.

An object type can be a description of the function such as machine, customer, supplier or activity descriptions such as invoice, request. Objects are instances of these types. Events in particular have an event type, termed activity. The same non-uniqueness applies here —many events can have the same type like "processing complaint", "cooking coffee". Each event is described by exactly one type. OCED assumes event atomicity; each event is indivisible. Each event has one timestamp. Compared to traditional PM, events may relate to multiple objects through a qualifier (E2O). Such a qualifier may be, considering the event "printing label" and object "printing station", the label to be printed. Objects may be related to multiple objects (O2O). O2O relationships are frozen (static) and are assumed to not change. The O2O relationship may be used to describe the order of producing a product. For example, the O2O relation "main pcb to gyroscope" may say that the main pcb has to be produced before the gyroscope. Another O2O relation can be an order, the connection between the customer object and the ordered product. It is worth mentioning that objects can also be related indirectly together through two E2O relations: The E2O relation "producing" may connect the event "machine 1 produces" with the object "gyroscope". The E2O relation "check" may connect the event "machine 1 checks" with the object "main pcb", thus connecting the two objects "gyroscope" and "main pcb" indirectly via two events (W. M. van der Aalst, 2019). E2O relations are dynamic. They may change over time, involving different objects. In the given example, "main pcb" would be checked with "display" instead of "gyroscope".

Events and objects have attributes (keys), possessing values. Event attribute values refer to exactly one event and one event attribute, they are not shared. For example, the cost for one event may have the value 10€. The same logic applies to objects as well, one event attribute value refers to exactly one object and one object attribute. Because several events may have the same type and several objects may have the same type as well, each event- or object type may refer to any number of event or object attributes. They open interpretative possibilities for the modeller by considering them as expected attributes for the event or object type. The given example may be the event type "producing" which may have the event attribute "duration" and "cost". The object type "gyroscope" may have the object attribute "weight" and "size". One may average the different object attribute values of one type cluster to generate object type KPIs. A key specificity of object attribute values lies in the fact that they have a timestamp. Event attribute values do not. Latter information would be redundant because events to already have a timestamp, see above. Event attribute values may have cardinality one per event. N event attributes have n values. This does not apply to

object attribute values. They may have multiple values because of their nature to change over time (W. M. van der Aalst, 2023). This is why each object attribute value has a timestamp. The attribute value is in conclusion unique for a given object during a given time given one attribute. The given example may be the object attribute "weight" of the object "main pcb" which may change over time. The object attribute value "weight" may have the value 100g at time t_1 and 120g at time t_2 .

OCEL thus extends traditional PM by accommodating the multi-object nature of complex processes. Unlike classical event logs—which restrict events to a single case—OCEL captures dynamic interactions among multiple objects via E2O relations and static inter-object dependencies through O2O relations. This enriched framework enables a more comprehensive representation of real-world processes, where events may concurrently affect several objects. Timestamped object attribution values enable the modeller to perform temporal analysis and KPI derivation (subsection 2.1.4). Overall, OCED provides a more detailed, semantically rich representation of complex, interconnected processes. (W. M. van der Aalst, 2023).

2.3.3 Process Mining as Enabling Technology

Recall that PM uses event logs to develop process models or to enhance existing ones, so these logs may serve as a foundation for VVUQ of models in general. Live twin data often can be exported to the event log format. Several standardizations have been proposed, with the IEEE XES standard being the most widely used (Van Der Aalst & van der Aalst, 2016). The XES standard defines a common format for event logs, enabling the exchange of event data between different software frameworks. The idea lies in exporting twin decisions or live data as event logs and then use PM tools to perform VVUQ. Replay may be used on SBDT simulated traces in comparison with actual event data to reveal mismatches in sequences or timing. For example, the SBDT could have predicted a circular process. Replay can be applied to further analyze this bottleneck. Play-Out can empower the modeller to sample a big amount of exemplary traces to gain KPIs. OCED object attribute values may offer even more insights. PPC systems (subsection 2.1.3) often times deliver even more data to enrich the event log so that VVUQ can be performed easier. If event log extraction out of the SBDT is performed online, VVUQ can be performed on the fly.

2.4 VVUQ in the Context of Simulation-Based Digital Twins

The previous sections introduced the concepts of DES, PPC, relevant KPIs, DT, PM and OCED. This section now focusses on VVUQ in the context of SBDT. The thesis at hand uses the term VVUQ to describe the process of verifying, validating and quantifying the uncertainty of a SBDT. Verification and validation has a long history in manufacturing and DES (Bitencourt et al., 2023). (Sel et al., 2025) add uncertainty quantification as a main interest. Their framework is applied in the medical domain, but they mention reasonable arguments regarding efficiency and safety of SBDT in general. Thus, the thesis considers VVUQ instead of merely verification and validation efforts. The following section introduces the basic concepts of VVUQ and its relevance for SBDT.

2.4.1 Development process of VVUQ Concepts

With the uprising of simulation models in the early 1950s (Evans et al., 1967), the need for VVUQ arose unknowingly to the modellers. The usability of such simulations was deemed high as long as the results were promising, increasing trust in the technology (Durst et al., 2017). Blind trust does not validate models. Contrarily, if the results more or less were satisfactory, the model was considered validated (Bonani et al., 2003).

The first effort to define and perform verification was performed by (Machlup, 1955) defining verification as "including the correctness of mathematical and logical arguments, the applicability of formulas and equations (...), the reliability and exactness of observations, the reproducibility of experiments, the explanatory or predictive value of generalizations.". (Naylor & Finger, 1967) further refined this definitions by introducing the idea of "goodness of fit". Latter describes the capability of the model to correctly reflect the modelled system. During the 1970s, researchers like Schlesinger (Schlesinger, 1979) defined validation as achieving a "satisfactory range of accuracy consistent with the application", while Ignall argued for validation against simulations rather than analytical models (Ignall et al., 1978). Sargent's work from 1979 to 1984 proposed methods like user collaboration and independent VV, detailing techniques such as sensitivity analysis and Turing tests (Sargent, 2010). Balci developed a taxonomy and emphasized continuous VV, reflecting the need for ongoing assessment (Balci, 2012).

By 2004, modern VV emerged. Considering model fidelity of today's approaches,

(Oberkamp et al., 2004) introduced widely recognized definitions of VV:

Verification is the process of determining that a model implementation accurately represents the developer’s conceptual description of the model and the solution to the model.

Validation is the process of determining the degree to which a model is an accurate representation of the real world from the perspective of the intended uses of the model. (Oberkamp et al., 2004)

Verification thus concerns itself with the correctness of the given model (Sargent, 2010), while validation evaluates the quality of explanations quantitatively (Oberkamp et al., 2004). International Organization for Standardization spans the concept of validation to computational models, where valid models correctly reflect the users intended functionality. PPC may provide the modeller with relevant KPIs to assess both.

Uncertainty quantification (UQ) is a relatively new field in VV. It aims to quantify the uncertainty of the model and its predictions through the whole lifecycle of the model, including training, inference and prediction (Sel et al., 2025). Uncertainty quantification empowers the modeller to define confidence intervals to correctly emphasize the stochastic nature of the model predictions (Volodina & Challenor, 2021). This is crucial for SBDT, where real-time decisions rely on accurate representations, as (Francis et al., 2021) highlights the need for continuous updates. UQ differentiates *aleatory* uncertainty, which is inherent to the data, and *epistemic* uncertainty, which is due to lack of knowledge (Sel et al., 2025). Aleatory uncertainty may arise due to sensor errors in the physical entity, generating noise. Epistemic uncertainty may arise due to lack of data or knowledge about the physical entity (Thelen et al., 2023). Epistemic uncertainty can be reduced. (Abdoune et al., 2022) provide a comprehensive overview of UQ challenges and potential solutions in the context of SBDT.

For SBDT, VVUQ is not a one-time activity but a continuous process, ensuring digital twins mirror physical systems accurately. This is vital for industries like manufacturing, where decisions based on digital twins have significant implications section 1.2. The historical development of VVUQ, from early verification to integrated UQ, reflects the growing complexity of simulation models. As SBDT become central to decision-making, robust VVUQ practices ensure reliability, linking back to foundational concepts introduced earlier, see subsection 2.2.1. The concepts of VVUQ are embedded in the context of PM and OCED, which may further assist described endeavours. Especially for UQ, PM

offers a rich data source to quantify uncertainty and validate models by providing a *degree of fit* of the given process model.

2.4.2 VVUQ for Automatically Generated Models

AMG stem largely stem from the DES discipline (??), termed ASMG (Charpentier & Véjar, 2014; Milde & Reinhart, 2019). They may use data-driven techniques which reduce the manual effort to create and update themselves. These models adapt quickly to changing conditions, making them valuable for dynamic environments like manufacturing. However, ensuring their reliability requires specific VVUQ. Because ASMG models often are black boxes, traditional VVUQ methods may not be applicable. The challenge lies in understanding the model's internal logic and ensuring it accurately reflects the physical system. If sophisticated data driven methods have been applied, several *key challenges* arise, hindering successful VVUQ:

- **Model Opacity:** ASMG models often use sophisticated machine learning algorithms like neural networks. Such black-box models are difficult to interpret, making it hard to understand their internal logic. This opacity may hinder VVUQ, as the modeller cannot easily identify errors or biases.
- **Data Dependency:** Data-driven models rely on high-quality data. If the data is biased or noisy, the model's predictions may be inaccurate.
- **Dynamic Model Adaptation:** Models that continuously learn and adapt, such as those employing online learning, require ongoing validation to ensure they remain valid as new data is ingested. This dynamic nature introduces the risk of concept drift (Lu et al., 2018), where the underlying process changes over time, potentially degrading model performance.
- **Quantifying Uncertainty:** Model predictions are stochastic in nature. For applications where precision is crucial, such as in manufacturing, uncertainty needs to be quantified.

To assess these challenges, the thesis defines the following *key requirements* for VVUQ of automatically generated models, especially SBDT:

- **Model Interpretability:** Ensuring the model's internal logic is transparent and understandable, enabling the modeller to identify errors or biases. Developing and employing techniques to make the decision-making processes of automatically generated models more transparent is crucial for VVUQ. Explainable AI methods, such as SHAP (SHapley Additive exPla-

nations, (Lundberg & Lee, 2017)) or LIME (Local Interpretable Model-agnostic Explanations, (Ribeiro et al., 2016)), can help shedding light on model behavior, facilitating verification efforts. This is particularly important for black-box models like deep neural networks, where understanding the reasoning behind predictions is challenging. Often times, it may be easier to use white-box models like decision trees or linear regression models, which are interpretable by design. Such models are often times labeled transparent models. If black-box models are instead chosen, so called *surrogate models* may be used to approximate the black-box model. The surrogate model is a white-box model, which is easier to interpret. This approach is called *post-hoc* explanation (Fischer et al., 2024). SBDT generating explanations by themselves are the ultimate goal.

- **Upholding Data Quality:** Implementing procedures to ensure that the data used for model generation and validation is accurate, complete, and representative of the operational environment is vital. This includes data cleaning, preprocessing, and plausibility checks to identify and mitigate issues like missing values, outliers, or biases. For instance, in manufacturing digital twins, sensor data must be validated for accuracy and consistency to ensure reliable model outputs (Rodríguez et al., 2023).
- **Validatable Algorithms:** Besides ensuring model interpretability, the algorithms used for model generation must be validatable. Security risks are a huge concern for companies employing SBDT into their processes (Alcaraz & Lopez, 2022). The algorithms used have to be secure, hardened against attacks. This is especially important for online learning algorithms, which may be vulnerable to adversarial attacks (Balta et al., 2023). Manipulated data may lead to incorrect model predictions, causing severe consequences in safety-critical applications like autonomous driving or medical diagnosis. Ensuring the robustness of the algorithms is crucial for reliable VVUQ.
- **Continuous Validation:** VVUQ processes have to work in real-time to ensure the model remains valid as new data is ingested. This requires continuous monitoring and validation of the model's predictions against real-world data. Techniques like online validation (Francis et al., 2021) can help ensure the model's accuracy and reliability over time. This is particularly important for SBDT, which are designed to adapt to changing conditions and provide real-time insights. Continuous validation ensures the model remains reliable and trustworthy, even as the underlying process

evolves.

- **Integration:** VVUQ processes have to be integrated into existing model- and PPC infrastructure to be able to perform VVUQ on the fly. This requires close collaboration between data scientists, domain experts, and IT specialists to ensure the seamless integration of VVUQ processes into the model lifecycle.
- **Scalability:** VVUQ processes have to be scalable as the underlying model or data evolves over time. This requires the development of scalable VVUQ techniques that can handle large volumes of data and complex models. Of course, the infrastructure must be able to handle the increased computational load.

As noted by Francis et al., the lifecycle SBDT has implications for its VVUQ as well: VVUQ must accompany the SBDT in all phases, from conceptualization to deployment and operation. The key requirements outlined above provide a foundation for developing robust VVUQ processes for automatically generated models, ensuring their reliability and accuracy in real-world applications.

2.4.3 Traditional versus Machine Learning-Based Approaches

VVUQ can be performed using traditional methods or more sophisticated approaches. Traditional verification techniques may include code inspection, unit testing or debugging (Maniaci, 2018). If closed solutions to simulated models are available, they may be used to validate the simulation. Traditional validation techniques involve comparisons between model predictions and real-world data, such as statistical tests or sensitivity analysis. In the context of manufacturing, simple experiments or historical data can be used. The consultation of experts is another possibility (Shao et al., 2023).

Machine Learning-Based VVUQ

Sophisticated approaches may include the use of machine learning (ML) techniques to enhance VVUQ processes. ML can be used to identify patterns in data, detect anomalies, and improve model predictions. In addition to supervised and unsupervised learning shortly introduced in subsection 2.2.2, semi-supervised learning and reinforcement learning are two other approaches. Supervised learning may be employed where labels regarding the validity or non-validity of an OCEL (see subsection 2.3.2) are given. Unsupervised learning may provide such labels as learned categories if they are missing or may assist with finding common patterns in the data. Unsupervised techniques are context-agnostic and

assume no patterns in the data, see Hastie et al. for the reverse problem of encoding a priori information in unsupervised algorithms. Semi-supervised learning combines labeled and unlabeled data to improve model performance. It somehow forms a middle ground where lots of unlabelled data is available and is then grouped by the algorithm. The scarce data is then used in the holdout set to perform testing (Learning, 2006). Reinforcement learning is not commonly applied in VVUQ of SBDT. ML techniques are often referred to as "oracles" when used for VVUQ because of their key challenge of opacity subsection 2.4.2.

Challenges in Data Preparation and Feature Selection

Before discussing the application of ML techniques in VVUQ, several problems hindering successful application of ML in VVUQ are identified. The first problem is data quality (X. Wu et al., 2025). Data quality may degrade the performance and reliability of ML-based VVUQ approaches. Firstly, *missing values* in the dataset can hinder the training process and potentially introduce biases. To account for this, imputation strategies or simply removing defect rows may be a solution (Gudivada et al., 2017). The modeller has to keep in mind that this may corrupt the VVUQ process. Secondly *outliers*, which are data points that deviate significantly from the rest, create a challenge as they might represent real trends in the data (and thus containing valuable edge cases for VVUQ) or simply be erroneous entries, requiring care of the modeller. Thirdly *noise* can overblend the underlying patterns that ML algorithms aim to learn, reducing the accuracy and generalization ability of the VVUQ models (Liu et al., 2020). Such noise may be random, for example by measuring environmental influence, or systematic, for example emitted by erroneous sensors. The first kind of noise can be reduced by smooting or filtering.

Inconsistent data is another mistake to avoid in data gathering. It may arise from deviations in formats, units or representations of the same information. It can lead to confusion for ML algorithms and require standardization and cleaning (Mahanthappa & Chandavarkar, 2021). Duplicate data entries may also generate false trends in the data. Imbalance introduced by duplicates or measurement erros can bias the model in predicting only the majority class when a classification problem is at hand. Beyond data quality, the modeller has to make sure that the data is representative and bias-free. The training data used for VVUQ models must accurately reflect the operational environment. Biases can arise through human intervention or environmental influence (Liu et al., 2020). Finally, the way data is split into training, testing, and validation sets is important for avoiding overfitting. Here, the model memorizes the training data and fails

to generalize to unseen data.

After ensuring data quality, the modeller has to consider suitable features for the given problem. Features are columns in the dataset describing characteristics of the data points (rows) through values. OCEL provide a relatively strict feature set in which the modeller has to operate. This has the advantage that several of the upper challenges may be eliminated because the data can be exported through a standardized interface. Successful VVUQ methods may require additional features nonetheless. Only the most relevant features may be selected (Géron, 2022). Feature engineering describes the endeavour of creating new features through combining existing features or through a new data gathering process. The incorporation of features in model training is coined feature selection. In the given use case, an adaptive feature a feature selection based on twin components may be useful, see subsection 2.1.2.

Classification Methods for the Detection of Model Deviations

Extensive work has been done on the topic of ML-based deviation detection. Such deviations are called "anomalies" and the process is termed "anomaly detection" (Kharitonov et al., 2022). Anomalies are data points that deviate significantly from the majority of the data. They can be classified into three categories: point anomalies, contextual anomalies and collective anomalies (Chandola et al., 2009). Point anomalies are single data points that differ significantly from the rest of the dataset. Contextual anomalies are data points that are normal in one context but anomalous in another. They appear less often than point anomalies and have less statistical weight. Collective anomalies are groups of data points that are anomalous when considered together but may not be anomalous individually. Anomalies are of special interest in the context of VVUQ, as they can indicate potential issues with the model or the data, see section 3.3.

Several algorithms exist to detect anomalies, including statistical methods, clustering-based methods, and supervised learning methods. If the data is sufficiently labelled and preprocessed, supervised methods are promising. Algorithms such as Support Vector Machines (SVM), Neural Networks (NN), Decision Trees, and Random Forests can learn from this labeled data to classify new model outputs or behaviors as either normal or deviative. However, a common challenge in anomaly detection scenarios is the issue of class imbalance, where instances of normal behavior are more common than the occurrences of deviations. This imbalance needs to be carefully addressed during model training to prevent the classifier from being biased towards the majority class. Clustering-based unsu-

pervised methods detect anomalies through grouping similar data points together. Algorithms like K-Means, DBSCAN, and Hierarchical Clustering can be used to identify clusters of normal behavior, with anomalies being those points that do not belong to any cluster. They measure the distance between data points to cull anomalous points as reaching far outside of a group of common data points. Often times the assigned groups can be plotted, yielding further insights in the nature of the detected anomalies. Statistical methods, on the other hand, rely on the assumption that the data follows a certain distribution. They identify anomalies based on statistical properties such as mean, variance, and standard deviation (Chandola et al., 2009).

Anomaly detection and VVUQ share common goals of identifying deviations from expected behavior and ensuring the reliability of models. The two fields can benefit from each other, as VVUQ can provide a framework for evaluating the performance of anomaly detection algorithms, while anomaly detection techniques can enhance VVUQ processes by identifying potential issues in models or data.

2.4.4 Modern VVUQ in the Context of SBDT

ML-based VVUQ approaches heavily rely on data. In the preceding sections, the thesis introduced several interfaces which may serve as suitable data sources. PM/OCED may provide event logs for VVUQ approaches—ML approaches can ingest those. PPC systems may provide additional data to enrich the event log. This section will shed light on a systematic literature review (SLR) on VV in the context of DTs. After summarizing the main findings, several VV approaches with increasing sophistication are presented. The section closes with a discussion of the most promising approaches.

(Bitencourt et al., 2023) conducted a SLR on VV in the context of DT—a relatively new field. They did not consider uncertainty quantification in their SLR. As (Hua et al., 2022) note, there are no structured and established frameworks for validating DTs. This statement holds for all sectors where DTs are applied. The SLR analyzed 269 papers. They applied the 4R framework by (Osho et al., 2022) to describe the capabilities of the analyzed twin frameworks. The 4R framework consists of the four dimensions *Representation*, *Replication*, *Reality* and *No DT*. The SLR found that most frameworks (49%) rather developed a DM or DS. Another 26% of DT were only able to *represent* the physical entity. Highly sophisticated DT were the exception, not the rule. Considering this trend, VV may not be a topic researchers are interested in at first sight. (Bitencourt et

al., 2023) identified a trend throughout the years of increasing modelling capabilities of the considered DT. Up to the year 2023, the trend is still increasing. They identify more data sources as the main driver for this trend. From the 269 papers, 47% have been applied in the manufacturing domain. Of all classified DT, one key insight is that most authors performed atleast one form of VV.

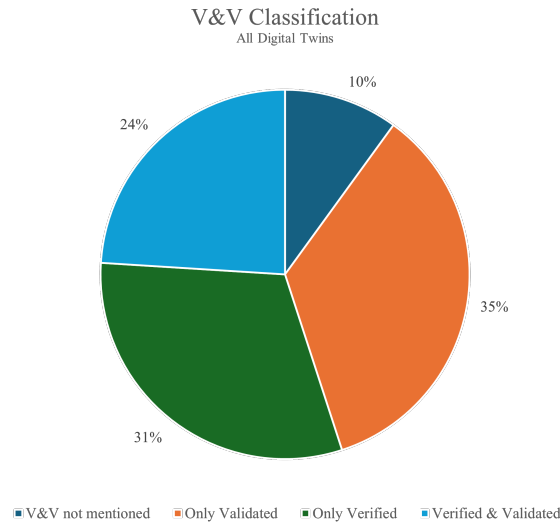


Figure 2.4: Donut chart showing the distribution of VV methods in the context of DT.

DTs ranking in the *reality* category where most often verified and validated. The authors deduct that because of the increasing complexity of the model, VV may become a stressing topic. (Nie et al., 2023) propose a multi-agent and cloud-edge orchestration framework leveraging Digital Twin and IIoT to optimize distributed manufacturing resources. Their framework integrates a Convolutional Neural Network (CNN) with a bidirectional Long Short Term Memory (LSTM) module to perform scheduling and self-adaptive strategies for intelligent, real-time production control. They compare their network with an earlier adopted algorithm and its result to perform VV. Quantifying the validity, they use Mean Squared Error (MSE) and Mean Absolute Error (MAE), see section 3.3. This can still be considered manual VVUQ, because they did not use an automatic algorithm to compare the metrics of both models. PROOF (Lv et al., 2023) defined target scenarios and boundaries to verify their DT for fault diagnosis of a drilling platform. They defined intervals for the metrics to be valid. Validation was performed by conducting a case study. Latter can be termed qualitative validation because the factual similarity of the case study against the DT has been assessed. Regarding their verification approach, they go one step further than (Nie et al., 2023) by defining control intervals. This is somewhat automatic verification, but still requires human intervention when the values leave the defined intervals. (Chen et al., 2023; Mykoniatis & Harris, 2021) both performed visual

inspection to verify their DT. Both used cameras or other visual inspection tools to compare the DT results with reality. (Chen et al., 2023) used thermal cameras to conduct temperature scans and compared the results with temperature prediction of the twin. (Mykoniatis & Harris, 2021) used video recordings to validate their twin behaviour, but consulted KPIs to further validate their twin. Both approaches use aids for measurements and visual inspection. The measurements still have to be conducted and compared manually. Some authors performed statistical VV, although the measurements were not automated. (Wang et al., 2023) compared historical data with the twin data and calculated the mean absolute percentage error of both datasets, section 3.3. For validation they relied on conducting a case study, thus not fully automating VV. (Min et al., 2019) performed verification using PPC KPIs, automating the VV process even further. Their validation included using a validation set and measuring a set of metrics including error of fit and accuracy. This approach can be considered the first step towards a fully automated VVUQ process. (Bitencourt et al., 2023) conclude that the majority of the analyzed papers performed VV manually, with only a few authors automating the process. They also note that most authors did not consider uncertainty quantification in their work. And indeed, most work was performed in only conducting verification (31%) where case studies were the method of choice (Eunike et al., 2022; Jia et al., 2023; Kumbhar et al., 2023; Leng et al., 2020, 2022). Case studies were also often applied where only validation tool place (35%) (Alam et al., 2023; Dobaj et al., 2022; Kherbache et al., 2022; Latsou et al., 2023; Leng et al., 2021; Negri et al., 2019). The SLR shows that VV is a topic of interest in the context of DT, but most authors still rely on manual methods. The trend towards more sophisticated DTs and the increasing complexity of models will likely drive further research in this area. The SLR also highlights the need for more automated and standardized VV processes, especially in the context of uncertainty quantification. Very few authors performed fully automated VVUQ for DT. The ones who did will now be discussed in more detail.

K-Nearest Neighbors (KNN) for Digital Twin Accreditation in Manufacturing

The k-Nearest Neighbors (KNN) algorithm, a lazy learning approach grounded in measuring feature similarity, can be used for the accreditation of manufacturing digital twins (dos Santos, Montevechi, et al., 2024). KNN classifies new data points by identifying the majority class among the K nearest neighbors in the training dataset. The determination of "being close" relies on various distance metrics. Most commonly, the Euclidean distance is used. Selecting an

appropriate value for K is crucial for balancing the model's bias and variance. The approach by (dos Santos, Montevechi, et al., 2024) integrates KNN with p-charts for the concurrent validation of SBDT (dos Santos, Campos, et al., 2024). This involves monitoring the DTs output over time and using KNN to classify its behavior. Subsequently, p-charts are employed to statistically monitor the proportion of anomalies detected by KNN. The X-axis represents the discretized time t , the Y-axis represents the proportion of anomalies detected by the KNN. P-charts normally show a relative proportion of nonconforming items in a sample (Acosta-Mejia, 1999). (Dos Santos, Montevechi, et al., 2024) enriched their chart with an upper control limit (UCL) and lower control limit (LCL) which stand for acceptable statistical boundaries. This approach is similar to (Nie et al., 2023) who also defined control intervals. If the p-value exceeds the boundaries, the twin may deviate from real behaviour. This method offers the advantage of real-time monitoring. However, it is sensitive to the choice of the hyperparameter K and can be computationally expensive for large datasets (dos Santos, Montevechi, et al., 2024). The presence of outliers and noisy data can also impact the accuracy of KNN, and its performance may decrease in high-dimensional spaces. The authors utilized metrics such as accuracy, precision, recall and F1-Score (section 3.3). They also used cross validation for increasing robustness of the prediction. By varying values for K , an optimal split may be found. Recalling the different kinds of anomalies from subsection 2.4.3, KNN is able to capture point anomalies and contextual anomalies. Collective anomalies are not captured by KNN, as they are not able to learn from the data.

Time Series Classification for Fault Localization

Time series classification techniques also play an important role in detecting and classifying anomalies within manufacturing digital twin systems (Lugaresi et al., 2023). These techniques involve training classifiers on simulation data generated by the digital twin to identify and categorize faults in the real physical system (Dihan et al., 2024). A case study involving a scale-model gantry crane demonstrates the application of time series classification for this purpose (Mertens & Denil, 2024). Other techniques in this domain often involve deep learning models such as CNN, Recurrent Neural Networks (RNN), and LSTM networks. These models perform well at automatically extracting relevant features from time series data (Cao et al., 2023), outperforming traditional rule-based or statistical methods in complex scenarios. Time series classification offers the benefits of automated anomaly detection and classification, with the potential for early fault prediction. However, a key challenge is the need for

sufficient labeled data for training these models (Zemskov et al., 2024), and real-time performance is often a critical requirement.

Uncertainty Quantification for Digital Twin Validation

VV is an important aspect of SBDT, but uncertainty quantification (UQ) is equally crucial. UQ aims to quantify the uncertainty associated with the predictions made by the digital twin, providing insights into the reliability and confidence of its outputs (Sel et al., 2025). Certainty in predictions creates trust in the application, a desirable property of SBDT when used in practice (Dwivedi et al., 2023). State of the art approaches to tackle uncertainty are Bayesian Neural Networks (BNN) (C. Li et al., 2017), Monte Carlo Dropout (MCD), Deep Ensembles (DE) and Gaussian Processes (GP). BNNs are able to quantify epistemic and aleatoric uncertainty (see ??). They are a type of neural network that introduce uncertainty into its predictions by treating the weights and biases as probability distributions rather than fixed values. Thus, each weight has a mean and a variance parameter for quantifying its uncertainty. During inference, samples are drawn from this distribution to *learn* its characteristics. This allows the model to capture uncertainty in the data and make probabilistic predictions (C. Li et al., 2017). MCD, DE and GP train surrogate models (see subsection 2.4.2) to approximate the uncertainty in the model's predictions.

MCD is a technique that uses dropout (Srivastava et al., 2014) during both training and inference phases to approximate the uncertainty in the model's predictions, unlike traditional dropout which is only used during training. By randomly dropping out neurons during inference with a chosen probability p , MCD generates multiple predictions, which then are averaged and can be used to estimate uncertainty. The key insight here is that effectively, the sampling happens from a dozen different NN because of their different weight configurations. We thus reach ensemble-learner like accuracy without the computational cost of training multiple complete models like in DE. DE involves training multiple models with different initializations and architectures, and then combining their predictions to obtain a more robust estimate of uncertainty (Rahaman et al., 2021). The difference between DE and MCD lies in statistically independent NNs, meaning they do not share statistical interaction processes. Furthermore, they are initialized randomly, whereas MCD networks share the same weight initialization. MCD and DE both provide good estimates for uncertainty, but it is recommended to apply both techniques after rigorous fine-tuning of the DNN architecture (Kamali et al., 2024). GPs are a non-parametric Bayesian approach that models the underlying function as a distribution over functions (Bilonis & Zabaras, 2012). They

provide a measure of uncertainty in their predictions by estimating the variance and mean of the predicted outputs (Burr et al., 2025).

Overall VVUQ for SBDT is conducted with varying efforts. There is not a lot of research on fully automated VVUQ processes. The SLR by (Bitencourt et al., 2023) shows that most authors still rely on manual methods, if VVUQ has been performed at all. The trend towards more sophisticated DTs and the increasing complexity of models will likely drive further research in this area. The SLR also highlights the need for more automated and standardized VVUQ processes, especially in the context of uncertainty quantification. Very few authors performed fully automated VVUQ for DT. The ones who did were presented in this section.

Approaches not applied in VVUQ yet

This section closes with considering diverse promising approaches not yet applied in concurrent VVUQ of SBDT, which could address the limitations identified in existing methods.

The Local Outlier Factor (LOF) is a distance-based approach which identifies data points with high variance, thereby detecting outliers potentially connected to rare events or concept drift (Alghushairy et al., 2020). Density-based methods, including Density-Based Spatial Clustering of Applications with Noise (DBSCAN), identify anomalies as data points placed in low-density regions (Çelik et al., 2011). These methods can effectively distinguish between clusters of normal behavior and deviations that fall outside these typical regions. The Isolation Forest algorithm offers an efficient approach for high-dimensional data by isolating anomalies through random data partitioning, where anomalies, being rare by nature, tend to be isolated more quickly than normal data points (Xu et al., 2017). One-Class Support Vector Machines (OCSVM) learn a boundary that capture the normal data, identifying any instances falling outside this region as anomalies (K.-L. Li et al., 2003). This method is especially useful when only data representing normal SBDT behavior is readily available, allowing the model to learn the manifold of "normal" operations and flag any future deviations. NN-based methods, particularly autoencoders (AE) (Zhou & Paffenroth, 2017), can be trained on normal SBDT data to learn a compressed representation and then reconstruct the original data. Anomalies typically exhibit higher errors when the AE tries to reconstruct the default behaviour, making them detectable. These methods are capable of learning complex, non-linear patterns in SBDT behavior and are effectively identify subtle deviations. Furthermore, semi-supervised techniques can

enhance deviation detection by leveraging a small amount of labeled anomaly data in comparison with a larger set of normal data. ■

This chapter established the theoretical foundation for the research presented in this thesis. It began by introducing DMFS and their simulation using DES, differentiating static and dynamic components. The discussion highlighted the connection between PPC and data quality. KPIs were identified as critical tools for balancing the inherent trade-offs between model accuracy, computational efficiency, and scalability—an omnipresent challenge in SBDT section 1.2.

The chapter then explored the concept of DT, SBDT, DDDT, and HDT. Each type was analyzed for its strengths and limitations, with SBDT relying on DES for dynamic representation, DDDT using machine learning for automated adaptation, and HDT combining domain knowledge with data-driven insights. PM was mentioned as a useful tool for DT validation, particularly through object-centric event logs (OCEL), which provide a multi-dimensional perspective on process interactions. OCEL's ability to capture complex, concurrent relationships between objects and events positions it as a powerful tool for enhancing traditional PM techniques.

Finally, the chapter addressed VVUQ as essential processes for ensuring the reliability of SBDT. Traditional VVUQ methods, such as statistical tests were compared with modern machine learning approaches, including KNN and BNN. This highlights the need for continuous, automated VVUQ frameworks capable of handling the dynamic nature of SBDT. Key challenges such as model opacity, data dependency, and uncertainty quantification were identified as critical areas for future research. Key requirements for successful VVUQ were developed.

These theoretical components—DMFS modeling, DT architectures, PM/OCEL integration, and advanced VVUQ techniques—form the foundation for this thesis. The next chapter will present the methodology employed to develop a framework for VVUQ of SBDT, addressing the challenges and opportunities identified in this chapter. The goal of the framework is to enhance the reliability and accuracy of SBDT in real-world applications.

Chapter 3

Framework Design

This chapter develops the methodological approach for automatically performing VVUQ for automatically generated SBDT in the manufacturing domain. The foundational methodology uses data-driven frameworks and applies ML techniques to verify and validate the SBDT. The following chapter structure derives requirements besides the identified key requirements given in subsection 2.4.2, categorizes them and presents a conceptual blueprint. It is based on the theoretical findings from Chapter 2 and designed to ensure that the VVUQ process is systematic, reproducible, and adaptable to different use cases.

3.1 Requirements Engineering

A thorough analysis of the requirements for the proposed VVUQ framework is essential. (Sindhgatta & Thonse, 2005) distinguishes between functional (FR, (Van Lamsweerde, 2001)) and non-functional requirements (NFR, (Glinz, 2005)). Functional requirements define the specific functions and features that the system must provide, while non-functional requirements specify the quality attributes, constraints, and performance criteria that the system must meet. Additionally, technical requirements (TR) and operational requirements (OR) may also be considered. TR specifies the technical specifications of the system which are necessary to meet the functional requirements (Chikh & Aldayel, 2012), while OR outlines the operational constraints and conditions under which the system must operate (INCOSE, 2023).

The following Figure 3.1 summarizes the key requirements identified in subsection 2.4.2 and adds requirements which have been derived from the theoretical findings in Chapter 2.

Functional Requirements	Real-Time Data Integration
	Automatic VVUQ
	Anomaly Detection
	Adaptive Recalibration
	Alert System
Non-Functional Requirements	Performance Monitoring
	Dynamic Scalability
	Resilience against Uncertainty
	Safety
	Interoperability
	Ease of Use
	Continuous Optimization
	Continuous Learning
Technical Requirements	Scalable Architecture
	Data Compatibility
	Hardware Requirements
	Historical Data
	Meta Data
	Labelled Data
Operational Requirements	Data Quality
	Data Stewardship
	Certifications and Monitoring
	Continuous Maintenance
	Runtime Environment

Figure 3.1: Key Requirements for the VVUQ framework differentiated by FR, NFR, TR, and OR.

Source: Own illustration.

Real-time data integration enables continuous synchronization between physical processes and the digital twin through real-time data streams. This is crucial for ensuring that the digital twin accurately reflects the current state of the physical system. The latency in this regard has to be minimized (H. Li et al., 2018). Of course, one FR has to be the Automatic VVUQ of the SBDT with its functional capabilities anomaly detection (Pang et al., 2021), uncertainty quantification (Sel et al., 2025), and adaptive recalibration to new physical states. The framework should also include an alarm management system that generates alerts and recommendations for action in the event of anomalies or validation errors. This is essential for ensuring that operators can respond quickly to potential issues and maintain the integrity of the system. The performance evaluation of the framework should be automated and include key performance indicators (KPIs) such as F1-Score, MAE, and synchronization accuracy see section 3.3.

The NFRs include dynamic scalability, which allows the framework to handle large amounts of data and complex models in real time (Leskovec et al., 2020). This is essential for ensuring that the system can adapt to changing conditions and requirements also defined by evolving technical requirements or new demands of the stateholders. The framework should also be robust against uncertainties, meaning it should be able to tolerate noise, incomplete data, and model uncertainties like concept drift. Security is another important NFR, as the framework must ensure the confidentiality and integrity of sensitive data. Interoperability with existing systems such as MES, ERP, and PLM systems is also crucial for successful integration into existing workflows. The user-friendliness

of the framework is important for ensuring that operators can easily monitor real-time data, visualize anomalies, and understand uncertainty metrics. Finally, continuous learning capabilities are essential for enabling the anomaly detection network to adapt to changing processes over time.

The TR includes a scalable architecture that can be deployed in cloud or edge environments to process real-time data streams. The framework should support heterogeneous data formats, including sensor data, CAD models, and IoT streams. The integration of the ResNet BiLSTM network into the data pipeline is essential for efficient anomaly detection. The framework should also include modules for uncertainty quantification, such as Monte Carlo simulations and Gaussian processes. Hardware requirements should be defined to ensure sufficient storage and computing capacity for deep learning and real-time processing. Finally, the framework should support protocols such as OPC UA, MQTT, and RESTful APIs for system integration. Several data sources and stewardship are required to ensure the quality of the data used for VVUQ. This includes real-time data streams, historical data for training and baseline comparisons, metadata for context information, labeled anomaly datasets for training the ResNet BiLSTM network, and data quality standards for noise filtering, consistency checking, and gap handling.

The OR incorporate several key aspects that ensure the effective operation of the framework. Data stewardship ensures that the data quality follows high standards throughout the whole process. Continuous monitoring, for example logging, maintenance procedures and a flexible runtime environment close the list of identified requirements.

3.2 An Automated VVUQ Framework for Automatically Generated SBDTs

3.3 Metrics and Key Figures for Model Evaluation

3.4 Online Validation and Continuous Feedback Loop

Chapter 4

Implementation

4.1 Architecture and System Setup

4.2 Event Log Processing

4.3 Simulation Integration

4.4 Machine Learning Pipeline

Chapter 5

Testing

5.1 Application Scenario and Data Basis

5.2 Automatically Generated Digital Twin

5.3 Validation Experiments

5.4 Results and Interpretation

5.5 Comparison with Manual Validation Methods

Chapter 6

Discussion

- 6.1 Evaluation of the Developed Framework**
- 6.2 Significance of Verification in Automatically Generated Digital Twins**
- 6.3 Limitations of Automated Validation**
- 6.4 Implications for Research and Practice**

Chapter 7

Conclusion and Outlook

7.1 Summary of the Key Findings

7.2 Methodological and Theoretical Insights

7.3 Outlook

7.4 Recommendations for Practical Application

Bibliography

- Abdoune, F., Nouiri, M., Cardin, O., & Castagna, P. (2023). Digital twin lifecycle: Core challenges and open issues. In T. Borangiu, D. Trentesaux, & P. Leitão (Eds.), *Service oriented, holonic and multi-agent manufacturing systems for industry of the future: Proceedings of sohoma 2022* (pp. 157–167). Springer International Publishing. https://doi.org/10.1007/978-3-031-19647-3_14
- Abdoune, F., Rifi, L., Fontanili, F., & Cardin, O. (2022). Handling uncertainties with and within digital twins. *International Workshop on Service Orientation in Holonic and Multi-Agent Manufacturing*, 118–129. https://doi.org/10.1007/978-3-031-24291-5_10
- Acosta-Mejia, C. A. (1999). Improved p charts to monitor process quality. *IIE transactions*, 31(6), 509–516. <https://doi.org/10.1080/07408179908969854>
- Aivaliotis, P., Georgoulas, K., Arkouli, Z., & Makris, S. (2019). Methodology for enabling digital twin using advanced physics-based modelling in predictive maintenance. *Procedia Cirp*, 81, 417–422. <https://doi.org/10.1016/j.procir.2019.03.072>
- Alam, M. D., Kabir, G., & Mirmohammadsadeghi, S. (2023). A digital twin framework development for apparel manufacturing industry. *Decision Analytics Journal*, 7, 100252. <https://doi.org/10.1016/j.dajour.2023.100252>
- Alcaraz, C., & Lopez, J. (2022). Digital twin: A comprehensive survey of security threats. *IEEE Communications Surveys & Tutorials*, 24(3), 1475–1503. <https://doi.org/10.1109/comst.2022.3171465>
- Alghushairy, O., Alsini, R., Soule, T., & Ma, X. (2020). A review of local outlier factor algorithms for outlier detection in big data streams. *Big Data and Cognitive Computing*, 5(1), 1. <https://doi.org/10.3390/bdcc5010001>
- Allahverdi, A., & Soroush, H. M. (2008). The significance of reducing setup times/setup costs. *European journal of operational research*, 187(3), 978–984. <https://doi.org/10.1016/j.ejor.2006.09.010>

- Arnold, D., & Furmans, K. (2005). *Materialfluss in logistiksystemen* (4th ed.). Springer-Verlag. <https://doi.org/10.1007/b139029>
- Arnold, D., & Furmans, K. (Eds.). (2006). *Materialfluss in logistiksystemen* (5th ed.). Springer Berlin Heidelberg.
- Arrieta, A. B., Díaz-Rodríguez, N., Del Ser, J., Bennetot, A., Tabik, S., Barbado, A., García, S., Gil-López, S., Molina, D., Benjamins, R., et al. (2020). Explainable artificial intelligence (xai): Concepts, taxonomies, opportunities and challenges toward responsible ai. *Information fusion*, 58, 82–115. <https://doi.org/10.1016/j.inffus.2019.12.012>
- Balci, O. (2012). A life cycle for modeling and simulation. *Simulation*, 88(7), 870–883. <https://doi.org/10.1177/0037549712438469>
- Balta, E. C., Pease, M., Moyne, J., Barton, K., & Tilbury, D. M. (2023). Digital twin-based cyber-attack detection framework for cyber-physical manufacturing systems. *IEEE Transactions on Automation Science and Engineering*, 21(2), 1695–1712. <https://doi.org/10.36227/techrxiv.21258102.v1>
- Barlow, H. B. (1989). Unsupervised learning. *Neural computation*, 1(3), 295–311. <https://doi.org/10.7551/mitpress/7011.003.0002>
- Bergmann, S. (2014). *Automatische generierung adaptiver modelle zur simulation von produktionssystemen* [Doctoral dissertation, Ilmenau, Technische Universitaet Ilmenau, Diss., 2013]. <https://doi.org/10.1109/wsc57314.2022.10015350>
- Biesinger, F., Meike, D., Kraß, B., & Weyrich, M. (2019). A digital twin for production planning based on cyber-physical systems: A case study for a cyber-physical system-based creation of a digital twin. *Procedia CIRP*, 79, 355–360. <https://doi.org/10.1016/j.procir.2019.02.092>
- Bilionis, I., & Zabaras, N. (2012). Multi-output local gaussian process regression: Applications to uncertainty quantification. *Journal of Computational Physics*, 231(17), 5718–5746. <https://doi.org/10.21236/ada554929>
- Bitencourt, L., Silva, M., & Costa, J. (2023). Building trust in digital twin through verification and validation. *Proceedings of the 2023 International Conference on Digital Twin Technologies*, 55–63. <https://doi.org/10.1000/bitencourt.2023.001>
- Bonani, F., Guerrieri, S. D., & Ghione, G. (2003). Physics-based simulation techniques for small-and large-signal device noise analysis in rf applications. *IEEE Transactions on Electron Devices*, 50(3), 633–644. <https://doi.org/10.1109/ted.2003.810477>

- Boschert, S., & Rosen, R. (2016). Digital twin—the simulation aspect. *Mechatronic futures: Challenges and solutions for mechatronic systems and their designers*, 59–74. https://doi.org/10.1007/978-3-319-32156-1_5
- Burr, C., Habli, I., Sharan, M., Morgan, P. D. J., de Cesare, K., Katell, M., Arana, S., Westerling, K., Laher, S., Polo, N., Faraoni, S., Leslie, D., Gavidia-Calderon, C., Strocchi, M., & Solís-Lemus, J. A. (2025). Trustworthy and ethical assurance of digital twins (tea-dt) [Funded by UKRI's Arts and Humanities Research Council as part of the BRAID programme]. <https://doi.org/10.1007/s43681-022-00178-0>
- Cao, H., Zhang, D., & Yi, S. (2023). Real-time machine learning-based fault detection, classification, and locating in large scale solar energy-based systems: Digital twin simulation. *Solar Energy*, 251, 77–85. <https://doi.org/10.1016/j.solener.2022.12.042>
- Çelik, M., Dadaşer-Çelik, F., & Dokuz, A. Ş. (2011). Anomaly detection in temperature data using dbscan algorithm. *2011 international symposium on innovations in intelligent systems and applications*, 91–95. <https://doi.org/10.1109/inista.2011.5946052>
- Chandola, V., Banerjee, A., & Kumar, V. (2009). Anomaly detection: A survey. *ACM computing surveys (CSUR)*, 41(3), 1–58. <https://doi.org/10.1145/1541880.1541882>
- Charpentier, P., & Véjar, A. (2014). From spatio-temporal data to manufacturing system model. *Journal of Control, Automation and Electrical Systems*, 25(5), 557–565. <https://doi.org/10.1007/s40313-014-0111-2>
- Chen, J., Li, S., Leng, X., Li, C., Kurniawan, R., Kwak, Y., & Ko, T. J. (2023). Bionic digital brain realizing the digital twin-cutting process. *Robotics and Computer-Integrated Manufacturing*, 84, 102591. <https://doi.org/10.1016/j.rcim.2023.102591>
- Chikh, A., & Aldayel, M. (2012). A new traceable software requirements specification based on iee 830. *2012 International Conference on Computer Systems and Industrial Informatics*, 1–6.
- Cui, Y., Kara, S., & Chan, K. C. (2020). Manufacturing big data ecosystem: A systematic literature review. *Robotics and computer-integrated Manufacturing*, 62, 101861. <https://doi.org/10.1016/j.rcim.2019.101861>
- Cunningham, P., Cord, M., & Delany, S. J. (2008). Supervised learning. In *Machine learning techniques for multimedia: Case studies on organization and retrieval* (pp. 21–49). Springer. https://doi.org/10.1007/978-3-540-75171-7_2

- Damm, W., & Harel, D. (2001). Lscs: Breathing life into message sequence charts. *Formal methods in system design*, 19, 45–80. https://doi.org/10.1007/978-0-387-35562-7_23
- Demkovich, N., Yablochnikov, E., & Abaev, G. (2018). Multiscale modeling and simulation for industrial cyber-physical systems. *2018 IEEE Industrial Cyber-Physical Systems (ICPS)*, 291–296. <https://doi.org/10.1109/icphys.2018.8387674>
- Der materialfluss im zuliefernetzwerk — integrierte und prozessorientierte planung und steuerung. (2007). In *Logistik in der automobilindustrie: Innovatives supply chain management für wettbewerbsfähige zulieferstrukturen* (pp. 73–100). Springer Berlin Heidelberg. https://doi.org/10.1007/978-3-540-68114-4_4
- Dihan, M. S., Akash, A. I., Tasneem, Z., Das, P., Das, S. K., Islam, M. R., Islam, M. M., Badal, F. R., Ali, M. F., Ahmed, M. H., et al. (2024). Digital twin: Data exploration, architecture, implementation and future. *Heliyon*. <https://doi.org/10.1016/j.heliyon.2024.e26503>
- Dobaj, J., Riel, A., Krug, T., Seidl, M., Macher, G., & Egretzberger, M. (2022). Towards digital twin-enabled devops for cps providing architecture-based service adaptation & verification at runtime. *Proceedings of the 17th Symposium on Software Engineering for Adaptive and Self-Managing Systems*, 132–143. <https://doi.org/10.1145/3524844.3528057>
- dos Santos, C. H., Campos, A. T., Montevechi, J. A. B., de Carvalho Miranda, R., & Costa, A. F. B. (2024). Digital twin simulation models: A validation method based on machine learning and control charts. *International Journal of Production Research*, 62(7), 2398–2414. <https://doi.org/10.1080/00207543.2023.2217299>
- dos Santos, C. H., Montevechi, J. A. B., Campos, A. T., de Carvalho Miranda, R., de Queiroz, J. A., & do Amaral, J. V. S. (2024). Simulation-based digital twins: An accreditation method. *2024 Winter Simulation Conference (WSC)*, 2856–2867. <https://doi.org/10.1109/wsc63780.2024.10838895>
- Durst, P. J., Anderson, D. T., & Bethel, C. L. (2017). A historical review of the development of verification and validation theories for simulation models. *International Journal of Modeling, Simulation, and Scientific Computing*, 8(02), 1730001. <https://doi.org/10.1142/s1793962317300011>
- Dwivedi, R., Dave, D., Naik, H., Singhal, S., Omer, R., Patel, P., Qian, B., Wen, Z., Shah, T., Morgan, G., et al. (2023). Explainable ai (xai): Core ideas, techniques, and solutions. *ACM Computing Surveys*, 55(9), 1–33. <https://doi.org/10.1145/3561048>

- Eberhard, K. (1987). *Einführung in die erkenntnis-und wissenschaftstheorie: Geschichte und praxis der konkurrierenden erkenntniswege*. Kohlhammer. <https://doi.org/10.1159/000397876>
- Eunike, A., Wang, K.-J., Chiu, J., & Hsu, Y. (2022). Real-time resilient scheduling by digital twin technology in a flow-shop manufacturing system. *Procedia CIRP*, 107, 668–674. <https://doi.org/10.1016/j.procir.2022.05.043>
- Evans, G. W., Wallace, G. F., & Sutherland, G. L. (1967). Simulation using digital computers. [https://doi.org/10.1016/0378-4754\(81\)90056-2](https://doi.org/10.1016/0378-4754(81)90056-2)
- Fischer, D., Hüsener, H. M., Grumbach, F., Vollenkemper, L., Müller, A., & Reusch, P. (2024). Demystifying reinforcement learning in production scheduling via explainable ai. *arXiv preprint arXiv:2408.09841*. <https://doi.org/10.1016/j.egyai.2023.100241>
- Francis, D. P., Lazarova-Molnar, S., & Mohamed, N. (2021). Towards data-driven digital twins for smart manufacturing. *Proceedings of the 27th International Conference on Systems Engineering, ICSEng 2020*, 445–454. https://doi.org/10.1007/978-3-030-65796-3_43
- Frank, A. G., Dalenogare, L. S., & Ayala, N. F. (2019). Industry 4.0 technologies: Implementation patterns in manufacturing companies. *International Journal of Production Economics*, 210, 15–26. <https://doi.org/10.1016/j.ijpe.2019.01.004>
- Friederich, J., Francis, D. P., Lazarova-Molnar, S., & Mohamed, N. (2022). A framework for data-driven digital twins of smart manufacturing systems. *Computers in Industry*, 136, 103586. <https://doi.org/10.1016/j.compind.2022.103586>
- Geman, S., Bienenstock, E., & Doursat, R. (1992). Neural networks and the bias/variance dilemma. *Neural Computation*, 4(1), 1–58. <https://doi.org/10.1162/neco.1992.4.1.1>
- Géron, A. (2022). *Hands-on machine learning with scikit-learn, keras, and tensorflow: Concepts, tools, and techniques to build intelligent systems*. ” O’Reilly Media, Inc.”. <https://doi.org/10.1007/bf00993409>
- Glaessgen, E., & Stargel, D. (2012). The digital twin paradigm for future NASA and U.S. air force vehicles. *53rd AIAA/ASME/ASCE/AHS/ASC Structures, Structural Dynamics and Materials Conference*. <https://doi.org/10.2514/6.2012-1818>
- Glinz, M. (2005). Rethinking the notion of non-functional requirements. *Proc. Third World Congress for Software Quality*, 2, 55–64.
- Granelli, F., Capraro, R., Lorandi, M., & Casari, P. (2021). Evaluating a digital twin of an iot resource slice: An emulation study using the eliot platform.

- IEEE Networking Letters*, 3(3), 147–151. <https://doi.org/10.1109/lnet.2021.3097556>
- Grievies, M. (2014). *Digital twin: Manufacturing excellence through virtual factory replication* (tech. rep.) (White Paper). <https://doi.org/10.20944/preprints202305.1758.v1>
- Griffin, A. (1993). Metrics for measuring product development cycle time. *Journal of Product Innovation Management: An International Publication of the Product Development & Management Association*, 10(2), 112–125. <https://doi.org/10.1111/1540-5885.1020112>
- Gudivada, V., Apon, A., & Ding, J. (2017). Data quality considerations for big data and machine learning: Going beyond data cleaning and transformations. *International Journal on Advances in Software*, 10(1), 1–20. <https://doi.org/10.1109/tbdata.2017.2680460>
- Hastie, T., Tibshirani, R., Friedman, J., Hastie, T., Tibshirani, R., & Friedman, J. (2009). Unsupervised learning. *The elements of statistical learning: Data mining, inference, and prediction*, 485–585. https://doi.org/10.1007/b94608_14
- He, R., Chen, G., Dong, C., Sun, S., & Shen, X. (2019). Data-driven digital twin technology for optimized control in process systems. *ISA transactions*, 95, 221–234. <https://doi.org/10.1016/j.isatra.2019.05.011>
- Hevner, A. R., March, S. T., Park, J., & Ram, S. (2004). Design science in information systems research. *MIS quarterly*, 75–105. https://doi.org/10.1007/978-1-4419-5653-8_2
- Hua, E. Y., Lazarova-Molnar, S., & Francis, D. P. (2022). Validation of digital twins: Challenges and opportunities. *2022 Winter Simulation Conference (WSC)*, 2900–2911. <https://doi.org/10.1109/WSC57314.2022.10015420>
- Huang, Z., Fey, M., Liu, C., Beysel, E., Xu, X., & Brecher, C. (2023). Hybrid learning-based digital twin for manufacturing process: Modeling framework and implementation. *Robotics and Computer-Integrated Manufacturing*, 82, 102545. <https://doi.org/10.1016/j.rcim.2023.102545>
- Ignall, E. J., Kolesar, P., & Walker, W. E. (1978). Using simulation to develop and validate analytic models: Some case studies. *Operations Research*, 26(2), 237–253. <https://doi.org/10.1287/opre.26.2.237>
- Imseitif, J., Tang, H., & Smith, M. (2019). Throughput analysis of manufacturing systems with buffers considering reliability and cycle time using des and doe. *Procedia Manufacturing*, 39, 814–823. <https://doi.org/10.1016/j.promfg.2020.01.423>
- INCOSE. (2023). *Incose systems engineering handbook*. John Wiley & Sons.

- International Organization for Standardization. (2017). Iso/iec/ieee 24765 systems and software engineering - vocabulary. <https://doi.org/10.17487/rfc0892>
- Jia, W., Wang, W., & Zhang, Z. (2023). From simple digital twin to complex digital twin part ii: Multi-scenario applications of digital twin shop floor. *Advanced Engineering Informatics*, 56, 101915. <https://doi.org/10.1016/j.aei.2023.101915>
- Jones, D., Snider, C., Nassehi, A., Yon, J., & Hicks, B. (2020). Characterising the digital twin: A systematic literature review. *CIRP Journal of Manufacturing Science and Technology*, 29, 36–52. <https://doi.org/10.1016/j.cirpj.2020.02.002>
- Judijanto, L., Qadriah, L., Prabowo, I. A., Widyatmoko, W., & Sabila, P. C. (2024). Trends in digital twin technology for industry 4.0: A bibliometric study. *The Eastasouth Journal of Information System and Computer Science*, 2(02), 92–104. <https://doi.org/10.58812/esiscs.v2i02.382>
- Kamali, M., Atazadeh, B., Rajabifard, A., & Chen, Y. (2024). Advancements in 3d digital model generation for digital twins in industrial environments: Knowledge gaps and future directions. *Advanced Engineering Informatics*, 62, 102929. <https://doi.org/10.1016/j.aei.2024.102929>
- Kapteyn, M. G., Knezevic, D. J., Huynh, D., Tran, M., & Willcox, K. E. (2022). Data-driven physics-based digital twins via a library of component-based reduced-order models. *International Journal for Numerical Methods in Engineering*, 123(13), 2986–3003. <https://doi.org/10.1002/nme.6423>
- Kharitonov, A., Nahhas, A., Pohl, M., & Turowski, K. (2022). Comparative analysis of machine learning models for anomaly detection in manufacturing. *Procedia Computer Science*, 200, 1288–1297. <https://doi.org/10.1016/j.procs.2022.01.330>
- Kherbache, M., Maimour, M., & Rondeau, E. (2022). Digital twin network for the iiot using eclipse ditto and hono. *IFAC-PapersOnLine*, 55(8), 37–42. <https://doi.org/10.1016/j.ifacol.2022.08.007>
- Kiran, D. (2019). *Production planning and control: A comprehensive approach*. Butterworth-heinemann. <https://doi.org/10.1016/b978-0-12-818364-9.00001-9>
- Köppen, M. (2000). The curse of dimensionality. *5th online world conference on soft computing in industrial applications (WSC5)*, 1, 4–8.
- Kovacs, G., & Kostal, P. (2016). Mathematical description of material flow. *Materials science and technology*, 1. <https://doi.org/10.1039/an9881301817>
- Kritzinger, W., Karner, M., Traar, G., Henjes, J., & Sihn, W. (2018). Digital twin in manufacturing: A categorical literature review and classification.

- IFAC-PapersOnLine*, 51(11), 1016–1022. <https://doi.org/10.1016/j.ifacol.2018.08.474>
- Kumbhar, M., Ng, A. H., & Bandaru, S. (2023). A digital twin based framework for detection, diagnosis, and improvement of throughput bottlenecks. *Journal of Manufacturing Systems*, 66, 92–106. <https://doi.org/10.1016/j.jmsy.2022.11.016>
- Latsou, C., Farsi, M., & Erkoyuncu, J. A. (2023). Digital twin-enabled automated anomaly detection and bottleneck identification in complex manufacturing systems using a multi-agent approach. *Journal of Manufacturing Systems*, 67, 242–264. <https://doi.org/10.1016/j.jmsy.2023.02.008>
- Learning, S.-S. (2006). Semi-supervised learning. *CSZ2006. html*, 5(2), 1. <https://doi.org/10.32583/keperawatan.v14i1.47>
- Lechevalier, D., Narayanan, A., Rachuri, S., & Foufou, S. (2018). A methodology for the semi-automatic generation of analytical models in manufacturing. *Computers in Industry*, 95, 54–67. <https://doi.org/10.1016/j.compind.2017.12.005>
- Leng, J., Chen, Z., Sha, W., Lin, Z., Lin, J., & Liu, Q. (2022). Digital twins-based flexible operating of open architecture production line for individualized manufacturing. *Advanced Engineering Informatics*, 53, 101676. <https://doi.org/10.1016/j.aei.2022.101676>
- Leng, J., Liu, Q., Ye, S., Jing, J., Wang, Y., Zhang, C., Zhang, D., & Chen, X. (2020). Digital twin-driven rapid reconfiguration of the automated manufacturing system via an open architecture model. *Robotics and Computer-Integrated Manufacturing*, 63, 101895. <https://doi.org/10.1016/j.rcim.2019.101895>
- Leng, J., Zhou, M., Xiao, Y., Zhang, H., Liu, Q., Shen, W., Su, Q., & Li, L. (2021). Digital twins-based remote semi-physical commissioning of flow-type smart manufacturing systems. *Journal of Cleaner Production*, 306, 127278. <https://doi.org/10.1016/j.jclepro.2021.127278>
- Leskovec, J., Rajaraman, A., & Ullman, J. D. (2020). *Mining of massive data sets*. Cambridge university press.
- Li, C., Mahadevan, S., Ling, Y., Wang, L., & Choze, S. (2017). A dynamic bayesian network approach for digital twin. *19th aiaa non-deterministic approaches conference*, 1566. <https://doi.org/10.2514/6.2017-1566>
- Li, H., Ota, K., & Dong, M. (2018). Learning iot in edge: Deep learning for the internet of things with edge computing. *IEEE network*, 32(1), 96–101. <https://doi.org/10.1109/mnet.2018.1700202>
- Li, K.-L., Huang, H.-K., Tian, S.-F., & Xu, W. (2003). Improving one-class svm for anomaly detection. *Proceedings of the 2003 international conference*

- on machine learning and cybernetics (IEEE Cat. No. 03EX693)*, 5, 3077–3081. <https://doi.org/10.1109/icmlc.2003.1260106>
- Lim, K. Y. H., Zheng, P., & Chen, C.-H. (2020). A state-of-the-art survey of digital twin: Techniques, engineering product lifecycle management and business innovation perspectives. *Journal of Intelligent Manufacturing*, 31(6), 1313–1337. <https://doi.org/10.1007/s10845-019-01512-w>
- Liu, Y., Dillon, T., Yu, W., Rahayu, W., & Mostafa, F. (2020). Noise removal in the presence of significant anomalies for industrial iot sensor data in manufacturing. *IEEE Internet of Things Journal*, 7(8), 7084–7096. <https://doi.org/10.1109/jiot.2020.2981476>
- Lu, J., Liu, A., Dong, F., Gu, F., Gama, J., & Zhang, G. (2018). Learning under concept drift: A review. *IEEE transactions on knowledge and data engineering*, 31(12), 2346–2363. <https://doi.org/10.1109/teyb.2024.3429459/mm1>
- Lugaresi, G., Gangemi, S., Gazzoni, G., & Matta, A. (2023). Online validation of digital twins for manufacturing systems. *Computers in Industry*, 150, 103942. <https://doi.org/10.1016/j.compind.2023.103942>
- Lugaresi, G., & Matta, A. (2021). Automated digital twins generation for manufacturing systems: A case study. *IFAC-PapersOnLine*, 54(1), 749–754. <https://doi.org/10.1016/j.ifacol.2021.08.087>
- Lundberg, S. M., & Lee, S.-I. (2017). A unified approach to interpreting model predictions. *Advances in neural information processing systems*, 30. <https://doi.org/10.21236/ada210961>
- Luo, W., Hu, T., Ye, Y., Zhang, C., & Wei, Y. (2020). A hybrid predictive maintenance approach for cnc machine tool driven by digital twin. *Robotics and Computer-Integrated Manufacturing*, 65, 101974. <https://doi.org/10.1016/j.rcim.2020.101974>
- Lv, J., Li, X., Sun, Y., Zheng, Y., & Bao, J. (2023). A bio-inspired lida cognitive-based digital twin architecture for unmanned maintenance of machine tools. *Robotics and Computer-Integrated Manufacturing*, 80, 102489. <https://doi.org/10.1016/j.rcim.2022.102489>
- Machlup, F. (1955). The problem of verification in economics. *Southern Economic Journal (pre-1986)*, 22(1), 1. <https://doi.org/10.1016/b978-0-12-464550-9.50013-3>
- Mahanthappa, S., & Chandavarkar, B. (2021). Data formats and its research challenges in iot: A survey. *Evolutionary Computing and Mobile Sustainable Networks: Proceedings of ICECMSN 2020*, 503–515. https://doi.org/10.1007/978-981-15-5258-8_47

- Maniaci, D. C. (2018). *Verification validation and uncertainty quantification (v&v/uq)*. (tech. rep.). Sandia National Lab.(SNL-NM), Albuquerque, NM (United States).
- Maria, A. (1997). Introduction to modeling and simulation. *Proceedings of the 29th conference on Winter simulation*, 7–13. <https://doi.org/10.1145/268437.268440>
- Martinez, G. S., Sierla, S., Karhela, T., & Vyatkin, V. (2018). Automatic generation of a simulation-based digital twin of an industrial process plant. *IECON 2018-44th Annual Conference of the IEEE Industrial Electronics Society*, 3084–3089. <https://doi.org/10.1109/iecon.2018.8591464>
- Mertens, J., & Denil, J. (2024). Localizing faults in digital twin models by using time series classification techniques. *2024 Winter Simulation Conference (WSC)*, 2868–2879. <https://doi.org/10.1109/wsc63780.2024.10838825>
- Milde, M., & Reinhart, G. (2019). Automated model development and parametrization of material flow simulations. *2019 Winter Simulation Conference (WSC)*, 2166–2177. <https://doi.org/10.1109/WSC40007.2019.9004702>
- Min, Q., Lu, Y., Liu, Z., Su, C., & Wang, B. (2019). Machine learning based digital twin framework for production optimization in petrochemical industry. *International Journal of Information Management*, 49, 502–519. <https://doi.org/10.1016/j.ijinfomgt.2019.05.020>
- Mykoniatis, K., & Harris, G. A. (2021). A digital twin emulator of a modular production system using a data-driven hybrid modeling and simulation approach. *Journal of Intelligent Manufacturing*, 32(7), 1899–1911. <https://doi.org/10.1007/s10845-020-01724-5>
- Naylor, T. H., & Finger, J. M. (1967). Verification of computer simulation models. *Management science*, 14(2), B–92. <https://doi.org/10.1287/mnsc.14.2.b92>
- Negri, E., Fumagalli, L., Cimino, C., & Macchi, M. (2019). Fmu-supported simulation for cps digital twin. *Procedia Manufacturing*, 28, 201–206. <https://doi.org/10.1016/j.promfg.2018.12.033>
- Negri, E., Fumagalli, L., & Macchi, M. (2017). A review of the roles of digital twin in cps-based production systems. *Procedia Manufacturing*, 11, 939–948. <https://doi.org/10.1016/j.promfg.2017.07.198>
- Nie, Q., Tang, D., Liu, C., Wang, L., & Song, J. (2023). A multi-agent and cloud-edge orchestration framework of digital twin for distributed production control. *Robotics and Computer-Integrated Manufacturing*, 82, 102543. <https://doi.org/10.1016/j.rcim.2023.102543>
- Oberkampff, W. L., Trucano, T. G., & Hirsch, C. (2004). Verification, validation, and predictive capability in computational engineering and physics. *Ap-*

- plied Mechanics Reviews*, 57(5), 345–384. <https://doi.org/10.1115/1.1767847>
- Osho, J., Hyre, A., Pantelidakis, M., Ledford, A., Harris, G., Liu, J., & Mykoniatis, K. (2022). Four rs framework for the development of a digital twin: The implementation of representation with a fdm manufacturing machine. *Journal of Manufacturing Systems*, 63, 370–380. <https://doi.org/10.1016/j.jmsy.2022.04.014>
- Oztemel, E., & Gursev, S. (2020). Literature review of industry 4.0 and related technologies. *Journal of intelligent manufacturing*, 31(1), 127–182. <https://doi.org/10.1007/s10845-018-1433-8>
- Pang, G., Shen, C., Cao, L., & Hengel, A. V. D. (2021). Deep learning for anomaly detection: A review. *ACM computing surveys (CSUR)*, 54(2), 1–38.
- Pantelides, C. C., & Renfro, J. G. (2013). The online use of first-principles models in process operations: Review, current status and future needs. *Computers & Chemical Engineering*, 51, 136–148. <https://doi.org/10.1016/j.compchemeng.2012.07.008>
- Peffer, K., Tuunanen, T., Rothenberger, M. A., & Chatterjee, S. (2007). A design science research methodology for information systems research. *Journal of management information systems*, 24(3), 45–77. <https://doi.org/10.2753/mis0742-1222240302>
- Pfeiffer, A., Gyulai, D., Kádár, B., & Monostori, L. (2016). Manufacturing lead time estimation with the combination of simulation and statistical learning methods. *Procedia Cirp*, 41, 75–80. <https://doi.org/10.1016/j.procir.2015.12.018>
- Pinedo, M. L., & Pinedo, M. L. (2012). Design and implementation of scheduling systems: Basic concepts. *Scheduling: theory, algorithms, and systems*, 459–483. https://doi.org/10.1007/978-0-387-78935-4_17
- Rahaman, R., et al. (2021). Uncertainty quantification and deep ensembles. *Advances in neural information processing systems*, 34, 20063–20075. <https://doi.org/10.1137/18m1200567>
- Reinhardt, H., Weber, M., & Putz, M. (2019). A survey on automatic model generation for material flow simulation in discrete manufacturing. *Procedia CIRP*, 81, 121–126. <https://doi.org/10.1016/j.procir.2019.03.022>
- Ribeiro, M. T., Singh, S., & Guestrin, C. (2016). ” why should i trust you?” explaining the predictions of any classifier. *Proceedings of the 22nd ACM SIGKDD international conference on knowledge discovery and data mining*, 1135–1144. <https://doi.org/10.1145/2939672.2939778>

- Robinson, S. (2014). *Simulation: The practice of model development and use*. Bloomsbury Publishing. [https://doi.org/10.1016/s1569-190x\(02\)00117-x](https://doi.org/10.1016/s1569-190x(02)00117-x)
- Rodríguez, F., Chicaiza, W. D., Sánchez, A., & Escaño, J. M. (2023). Updating digital twins: Methodology for data accuracy quality control using machine learning techniques. *Computers in Industry*, 151, 103958. <https://doi.org/10.1016/j.compind.2023.103958>
- Sargent, R. G. (2010). Verification and validation of simulation models. *Proceedings of the 2010 Winter Simulation Conference*, 166–183. <https://doi.org/10.1109/WSC.2010.5679166>
- Schlesinger, S. (1979). Terminology for model credibility. *Simulation*, 32(3), 103–104. <https://doi.org/10.2307/3328361>
- Schluse, M., & Rossmann, J. (2016). From simulation to experimentable digital twins: Simulation-based development and operation of complex technical systems. *2016 IEEE international symposium on systems engineering (ISSE)*, 1–6. <https://doi.org/10.1109/syseng.2016.7753162>
- Schwede, C., & Fischer, D. (2024). Learning simulation-based digital twins for discrete material flow systems: A review. *2024 Winter Simulation Conference (WSC)*, 3070–3081. <https://doi.org/10.1109/wsc63780.2024.10838729>
- Sel, K., Hawkins-Daarud, A., Chaudhuri, A., Osman, D., Bahai, A., Paydarfar, D., Willcox, K., Chung, C., & Jafari, R. (2025). Survey and perspective on verification, validation, and uncertainty quantification of digital twins for precision medicine. *npj Digital Medicine*, 8(1), 40. <https://doi.org/10.1038/s41746-025-01447-y>
- Sepasgozar, S. M. (2021). Differentiating digital twin from digital shadow: Elucidating a paradigm shift to expedite a smart, sustainable built environment. *Buildings*, 11(4), 151. <https://doi.org/10.3390/buildings11040151>
- Shao, G., Hightower, J., & Schindel, W. (2023). Credibility consideration for digital twins in manufacturing. *Manufacturing Letters*, 35, 24–28. <https://doi.org/10.1016/j.mfglet.2022.11.009>
- Sindhgatta, R., & Thonse, S. (2005). Functional and non-functional requirements specification for enterprise applications. *International Conference on Product Focused Software Process Improvement*, 189–201.
- Srivastava, N., Hinton, G., Krizhevsky, A., Sutskever, I., & Salakhutdinov, R. (2014). Dropout: A simple way to prevent neural networks from overfitting. *The journal of machine learning research*, 15(1), 1929–1958. https://doi.org/10.1007/978-981-99-1767-9_59

- Tao, F., Cheng, J., Qi, Q., Zhang, M., Zhang, H., & Sui, F. (2018). Digital twin-driven product design, manufacturing and service with big data. *The International Journal of Advanced Manufacturing Technology*, 94(9-12), 3563–3576. <https://doi.org/10.1007/s00170-017-0233-1>
- Thelen, A., Zhang, X., Fink, O., Lu, Y., Ghosh, S., Youn, B. D., Todd, M. D., Mahadevan, S., Hu, C., & Hu, Z. (2023). A comprehensive review of digital twin—part 2: Roles of uncertainty quantification and optimization, a battery digital twin, and perspectives. *Structural and multidisciplinary optimization*, 66(1), 1. <https://doi.org/10.1007/s00158-022-03410-x>
- Thiede, S., Seow, Y., Andersson, J., & Johansson, B. (2013). Environmental aspects in manufacturing system modelling and simulation—state of the art and research perspectives. *CIRP Journal of Manufacturing Science and Technology*, 6(1), 78–87. <https://doi.org/10.1016/j.cirpj.2012.10.002>
- Trauer, J., Schweigert-Recksiek, S., Schenk, T., Baudisch, T., Mörtl, M., & Zimmermann, M. (2022). A digital twin trust framework for industrial application. *Proceedings of the Design Society*, 2, 293–302. <https://doi.org/10.1017/pds.2022.31>
- Tsymbal, A. (2004). The problem of concept drift: Definitions and related work. *Computer Science Department, Trinity College Dublin*, 106(2), 58. <https://doi.org/10.1016/j.inffus.2006.11.002>
- Van Der Aalst, W., & van der Aalst, W. (2016). *Data science in action*. Springer. https://doi.org/10.1007/978-3-662-49851-4_1
- van der Aalst, W. (2012). Process mining. *Communications of the ACM*, 55(8), 76–83. <https://doi.org/10.1145/2240236.2240257>
- van der Aalst, W. M. (2019). Object-centric process mining: Dealing with divergence and convergence in event data. *Software Engineering and Formal Methods: 17th International Conference, SEFM 2019, Oslo, Norway, September 18–20, 2019, Proceedings 17*, 3–25. https://doi.org/10.1007/978-3-030-30446-1_1
- van der Aalst, W. M. (2023). Object-centric process mining: Unraveling the fabric of real processes. *Mathematics*, 11(12), 2691. <https://doi.org/10.3390/math11122691>
- Van Lamsweerde, A. (2001). Goal-oriented requirements engineering: A guided tour. *Proceedings fifth ieee international symposium on requirements engineering*, 249–262.
- Varga, A. (2001). Discrete event simulation system. *Proc. of the European Simulation Multiconference (ESM'2001)*, 17. <https://doi.org/10.1109/13.804564>

- Volodina, V., & Challenor, P. (2021). The importance of uncertainty quantification in model reproducibility. *Philosophical Transactions of the Royal Society A*, 379(2197), 20200071. <https://doi.org/10.1098/rsta.2020.0071>
- Wang, Y., Wang, S., Yang, W., Shen, C., & Li, J. (2023). A digital-twin-based adaptive multi-objective harris hawks optimizer for dynamic hybrid flow green scheduling problem with dynamic events. *Applied Soft Computing*, 143, 110274. <https://doi.org/10.1016/j.asoc.2023.110274>
- Wu, X., Moloko, L. E., Bokov, P. M., Delipei, G. K., Kaizer, J., & Ivanov, K. N. (2025). Uncertainty quantification for data-driven machine learning models in nuclear engineering applications: Where we are and what do we need? *arXiv preprint arXiv:2503.17385*. <https://doi.org/10.1080/00295639.2022.2123203>
- Wu, Y., Zhang, K., & Zhang, Y. (2021). Digital twin networks: A survey. *IEEE Internet of Things Journal*, 8(18), 13789–13804. <https://doi.org/10.1109/jiot.2021.3079510>
- Xu, D., Wang, Y., Meng, Y., & Zhang, Z. (2017). An improved data anomaly detection method based on isolation forest. *2017 10th international symposium on computational intelligence and design (ISCID)*, 2, 287–291. <https://doi.org/10.1109/iscid.2017.202>
- Zehnder, P., & Riemer, D. (2018). Representing industrial data streams in digital twins using semantic labeling. *2018 IEEE International Conference on Big Data (Big Data)*, 4223–4226. <https://doi.org/10.1109/bigdata.2018.8622400>
- Zemskov, A. D., Fu, Y., Li, R., Wang, X., Karkaria, V., Tsai, Y.-K., Chen, W., Zhang, J., Gao, R., Cao, J., et al. (2024). Security and privacy of digital twins for advanced manufacturing: A survey. *arXiv preprint arXiv:2412.13939*. <https://doi.org/10.1002/amp2.10078>
- Zhang, L., Zhou, L., & Horn, B. K. (2021). Building a right digital twin with model engineering. *Journal of Manufacturing Systems*, 59, 151–164. <https://doi.org/10.1016/j.jmsy.2021.02.009>
- Zhao, Y. F., Xie, J., & Sun, L. (2024). On the data quality and imbalance in machine learning-based design and manufacturing—a systematic review. *Engineering*. <https://doi.org/10.1016/j.eng.2024.04.024>
- Zheng, Y., Yang, S., & Cheng, H. (2019). An application framework of digital twin and its case study. *Journal of ambient intelligence and humanized computing*, 10, 1141–1153. <https://doi.org/10.1007/s12652-018-0911-3>
- Zhou, C., & Paffenroth, R. C. (2017). Anomaly detection with robust deep autoencoders. *Proceedings of the 23rd ACM SIGKDD international confer-*

ence on knowledge discovery and data mining, 665–674. <https://doi.org/10.1145/3097983.3098052>